

Frisbee

product name : The Frisbee to take food machine
product type : CS-6LED
color : wine red
size : W (107) *D (105) *H (15) mm
weight : 100g
displayed digit : four highlight numerical code
battery : 3.7V rechargeable battery
frequency : 433.92HZ, ASK modulation
received distance : about 1500m (open place)
waterproof rank : waterproof splash
resist fall off rank : resist fall off five meters
reminder the way : Shake & flicker & sound
Logo label size : diameter 70mm



Touch keyboard

product name : touch control launch host
Product model : CS-1000T
color : black
size : W(150)*D(97)*H(36)mm(exclude antenna)
weight : 195g
displayed digital : LED highlight numerical display
power source : 5V / 500mA
frequency : 433.92MHZ, ASK modulation
Launch distance : About 1500m (open place)
function : signal range test, over range test, hand control switch ,
infrared ray code , take food machine sound and light
shake parameter setting.



Charging cradle


product name : charging cradle -stack up
product type : CS-6C
color : wine red
size : W(107) D(105) H(15)mm
weight : 125g
power source : 5V / 5A



support extend ,the standard configuration support ten
take food machine charging at same time.

FRISBEE WIRELESS PAGING SYSTEM

INSTRUCTIONS

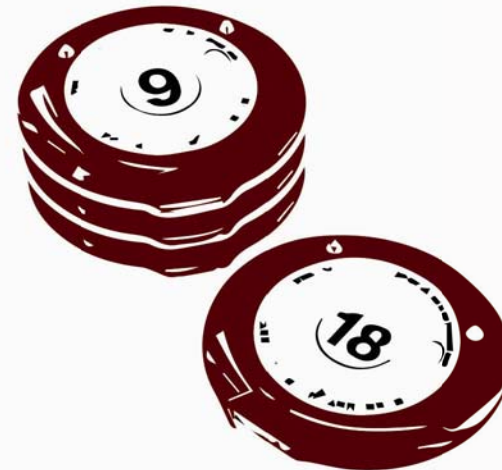

Range of application

Frisbee wireless paging system is widely used in coffee shop, food court, dessert shop, western restaurant, fast food restaurant, car model 4s shop, hospital, bank, customer service center and somewhere customers waiting in line.

The classical appearance of the round shape allow you have the best sense of holding. The anti-vibrate cushion is added to the product which makes it have longer endurance and higher waterproof degree. The product has the function of anti-10 meter drop.

wireless paging system provide more efficient service. It can establish friendly communication for waiters and customers, It can also help you to provide a quiet and comfortable environment so that the turnover can rise.

Products Characteristics

- Stacked one piece charging, launching system with easy and fast operation.
- Easy to install, save space, apply for large and medium place.
- Pioneer proprietary technology of touch hand type to identify the switch.
- Pioneer proprietary technology of infrared ray code.
- Wireless paging system capacity:1-99999 numbers, support to extend, ten standard configuration.
- High-end and simple design, easy to operate, anyone can use it easily.
- The appearance design for classic circular frisbee, comfort grip.
- Accurate call receive to provide excellent service for you.
- 2Finishing electricize for two hours, standby more than 72 hours.
- Wireless paging system has intelligent charging system to prevent overcharge, use rechargeable battery to reduce cost. The service life of battery is about 5 years. The indicator light is the battery charging is about 5 years, users change battery more simple and convenient.
- Unique ID system, many system can work in same place and get along well.
- Wireless paging system remind of signal which is beyond the scope.
- Wireless paging system has specialized labeling area for LOGO, support customize LOGO.
- Standard configuration number label.
- Wireless paging system support customize software system.
- Transmission coverage 1500m in open space, Can be used fully meet the interior layers of large area coverage.
- Easy to operate, the LED screen has better visual.

Operation procedure

1、 Firstly, set up alerts and function parameters on keyboard.

2、 Each wireless paging system code with keyboard through infrared ray.

3、 Call test, then it can use.

Specification

operation window



numbers keyboard area



All settings are set up on touch keyboard.
The system default password:1234
The master key:8421

- 0 — 9 : number
- ⚙️ : setting
- + : plus 1 and launch the call
- : subtract 1 and launch the call
- 🔔 : launch the call
- ✓ : confirm/save
- ↶ : back

function keyboard area

System menu

- F0// set light sound and vibration time limit 00 or 05-99 seconds. Don't limit time: default ten seconds.
- F1// add wireless paging system(infrared ray code) After set number on keyboard, put the wireless paging system right above the touch keyboard screen,if you hear the sound,the code is finish.
- F2 // flashing light
0=OFF 1=slow 2=medium 3=fast
4=gradual/default : 4
- F3 //warning tone flashing light
0=OFF 1=slow 2=medium 3=fast /default
- F4 // vibration setting
0=OFF 1=slow 2=medium 3=fast /default : 3
- F5 // boundary violation alarm
00-30 minutes default : 00 close
- F6 //service count down setting
00-99 minutes default : 00 close
- F7 //channel setting (different channel's keyboard don't interfere in each other)
01-99 default : 01
- F8 //password setting
0000-9999 default : 1234 super : 8421
- F9 //reset to defaults
input 00 , confirm

Common usage problems

- 1、 How to start?
Put your hand on keyboard (make sure coverage over8-9 key)keep over two minutes until show"ooo".
- 2、 How to close?
Put your hand on keyboard (make sure coverage over8-9 key)keep over two minutes until OFF.
- 3、 How to stop the remind sound?
Put the wireless paging system on charging base, or make the reminder time to stop automatically.
- 4、 How long the wireless paging system can standby?
Over 72 hours.

FCC WARNING

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.