



# User's manual



## 1. Specifications

## 2. Description

## 3. Key features

## 4. Charge

## 5. Pairing

- 5.1 How to pair with a phone
- 5.2 How to pair with a notebook
- 5.3 How to pair two devices simultaneously

## 6. Using guide

- 6.1 Power on
- 6.2 Power off
- 6.3 Call events control
- 6.4 Functions
- 6.5 Volume control
- 6.6 Music control

## 7. Note

## 8. Packing contains

## 9. Questions and answers

**Bluetooth headset with dual microphones**  
**Long-last battery and Mute function**

Dear, thanks for your order. We are committed to offering 100% satisfied service, no matter what you need to inquiry or have any questions, please feel free to contact us.

Glazata promises to reply quickly and serve you with a smiley face.

You can touch us at [sales@glazata.com](mailto:sales@glazata.com).

THANK YOU!

## 1. Specifications




Brand	Glazata	Product Name	EC300
Bluetooth version	5.1	Sensitivity	98±1.5dB
Battery capacity	125mAh	Talking time	24h
Charging time	40min	Standby time	90Days
Connection distance	10M	Weight	about 12g
Frequency characteristics	20Hz-20KHz	charging port	Type-C
Bluetooth operating frequency	2.402GHz-2.480GHz		
Support decoding type	SBC / AAC /aptX/aptX-HD		
Support Bluetooth protocol	A2DP V1.3/AVRCP V1.6/AVDTP V1.3 AVDTP V1.4/HFP V1.7/SPP V1.2 HSP V1.2/GATT V1.0		

## 2. Description

Combining dual-mics that cancel noise and wind technology, the EC300 headset will give you a super clear phone call experience. With the Qualcomm 3020 smart chip, lower power consumption offers an extremely long talking time. It also supports aptX low latency and aptX-HD sound experience to make more enjoyable.

## 3. Key features

Power ON/OFF	Place ON to power on and OFF to power off
Multifunction key	Answer/Reject/Redial /Hang up Play/Pause music
Volume key	Volume up and down and switch music
LED light	Status indicates
Mute key	Turn on or off your microphone function when making a phone call
Charging port	TYPE C port for charging

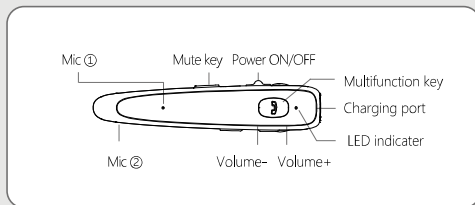

## 4. Charge

- a) Open the dust plug, plug in the type-c cable
- b) The other end connects to your charger
- c) Wait for the charge fully and plug out cable and place back the dust plug

About 40 min for a full charging



**Note:**

1. The indicator lights red when charging, and turns blue after charge fully.
2. Please disconnect when charging.

## 5. Pairing

## 5.1 How to pair with a phone

### a) Power on

Place the power ON/OFF key to the ON to turn on the headset, and then enter the pairing mode.

light flashing when pairing



### b) Pair with phone

Enable your phone's Bluetooth function, search for the "EC300" model and click to pair

**After pair successfully, the light will stop flash and then light every 10 seconds**

## 5.2 How to pair with a notebook

### a) Power on as normal steps

### b) Pair with your laptop (like my XIAOMI notebook)

Find the Bluetooth mark from the pull-up options on the bottom right corner, click it and then click "Add Bluetooth devices" to enter the Bluetooth & other devices page. Make sure the Bluetooth button was on "ON" place (default Open status), then click "Add Bluetooth & other devices" to select "Bluetooth" to search for the "EC300" model, click it to pair.

### 5.3 How to pair two devices simultaneously

a) Pair with the first phone successfully as the normal steps, then close your phone's Bluetooth function.



b) Pair with the second phone successfully also as the normal steps.



c) Enable the first phone's Bluetooth, select the "EC300" model to pair, and achieve connect with two devices at the same time

#### **Note:**

1. If you want to pair it with a phone and notebook, please pair it with the phone firstly.
2. If you want to switch devices, just need to stop/pause another device.
3. When you dial a phone call, please select the "EC300" model as your sound carrier.

## 6. Using guide

### 6.1 Power on

Push the Power ON/OFF key to ON place to turn on the headset and announce " power on".

### 6.2 Power off

Push the Power ON/OFF key to OFF place to turn off and announce "power off".

## 6.3 Call events control

### 1. Answer

Tap the multifunction key to answer an incoming call

### 2. Hang up

Tap again the multifunction key to end up your call

### 3. Reject

Long-press about 2 seconds the multifunction key to reject an incoming call

### 4. Redial

Double-tap the multifunction key to redial the last phone number you have dialed

### 5. Mute control

Tap the mute key once to close the microphone and tap again to open it

## 6.4 Functions

### Siri

Activate voice assistant

Long-press the multifunction key about 3 seconds then release



Reject the call

Tap the multifunction key or tap again



Answer/hang up

Long-press the multifunction key about 2 seconds



Play / Pause

Tap the multifunction key



Previous song

Long press the volume "-" key about 2 seconds



Next song

Long-press the volume "+" key about 2 seconds

### 6.5 Volume control

Tap the volume "+" key to increase the volume.

Tap the volume "-" key to decrease the volume.

※ Note: Some devices do not support wireless control, so please volume your device to the maximum at first.

### 6.6 Music control

1. Play/Pause: Tap the multifunction key
2. Previous song: Long-press the volume "-" key about 2 seconds
3. Next song: Long-press the volume "+" key about 2 seconds

## 7. Note

1. All apple and some android cell phones support battery status remind.
2. EC300 offers long-last talking time, up to 24h. The music time may be different depending on your volume and song style.
3. The effective connection distance can be up to 33ft, and work well within 5 meters because the long distance, the more disturbing elements and lead to poor pairing.



4. To last longer use limit, please charge the headset every 1.5 months although you don't pair it for a long time. Avoid touching chemical liquid or work in high-temperature and dust environment.

## 8. Packing contains

1 \* EC300 Bluetooth headset, 1 \* Type-C charge cable  
Ear tips 1 \* L/M/S set, 1 \* Rotatable ear hook

## 9. Questions and Answers

**Q: Why you can't pair with my phone?**

**Answer:** That may caused by the disordered Bluetooth program, you can try to clear your connection history and then reconnect.

**Q: The other end can't hear me via WhatsApp?**

**Answer:** Some smartphones may not support Bluetooth microphones, please update your phone's software version, if it still can't work, we will kindly suggest using your phone's mic. **If you are talking in a ZOOM meeting, please directly set in your ZOOM app.**

**Q: Can you wear on both ears?**

**Answer:** Yes, you can wear it on both right and left ears without trouble. You just need to rotate the ear hook.

**Q: Why does the headset always slip off?**

**Answer:** There are three sizes ( S/M/L ) ear tips available, you can choose one of them to ensure comfortable to wear

**FCC Caution:**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.