

# DV8949-OTT Ant Passive Test Report

SDMC-GJRD-SOP-006

## Record for version modification

Date	Revision	Modify Content	Author
2023-3-21	V1.0	1 <sup>st</sup> Version	Leon_Wu

Shenzhen SDMC Technology Co.,LTD

深圳市华曦达科技股份有限公司

Address: 19/F, Changhong Science & Technology Mansion, No.18, Keji South  
12th Road, High-tech Industrial Park, Nanshan District, Shenzhen, China

Mobile: 0755-86018266

Website: [www.sdmctech.com](http://www.sdmctech.com)

---

## Table of Contents

1 Test Summary .....	3
2 Test Information .....	3
3 Testing Environment .....	4
4 Matching Circuit Description .....	6
5 Assembly Description.....	6
6 Passive Parameter Test.....	7
6 Drawing.....	19



# 1 Test Summary


No.	Sample Name	Test item	Conclusion
1	DV8949-OTT	VSWR	Pass
2		Isolation	Pass
3		Efficiency & Gain	Pass
4		2D & 3D Radiation Pattern	Pass


# 2 Test Information

Model No.	DV8949-OTT
HW Version	MB.XXX.X
SW Version	BaseLine-v11.1.1.1
CPU	Amlogic XXXX
DDR	XXXXXXXXXX
Wi-Fi Module	XXXX/Manufacturer
Tester	XXX
Reviewer	XXX
Approver	XXX
Date	2023.XX.XX

### 3 Testing Environment

Chamber	XH Chamber
Wireless Communication Tester	R&S CMW500
Vector Network Analyzer	KEYSIGHT E5071C
Temperature	25±2°C
Humidity	50±20%Rh

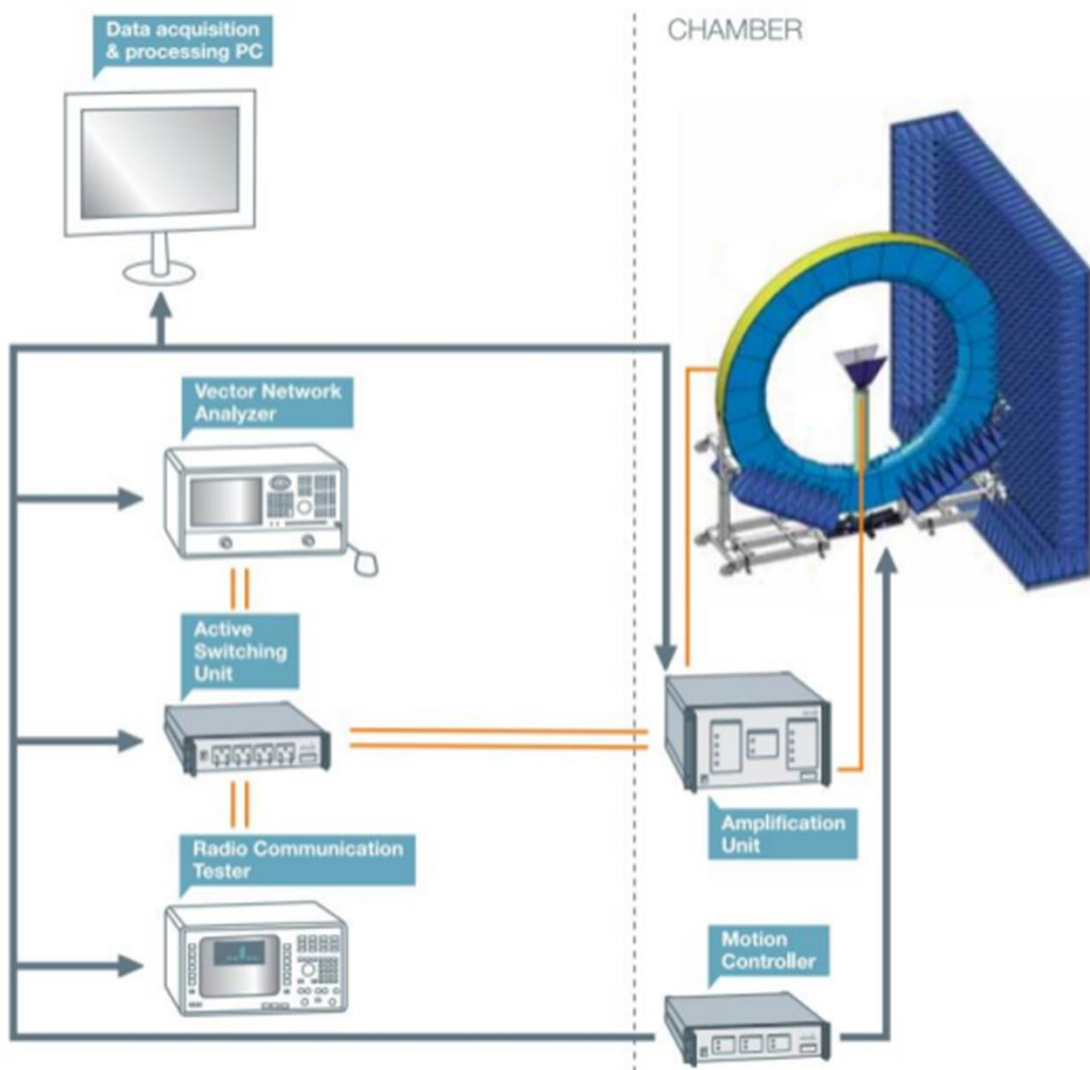

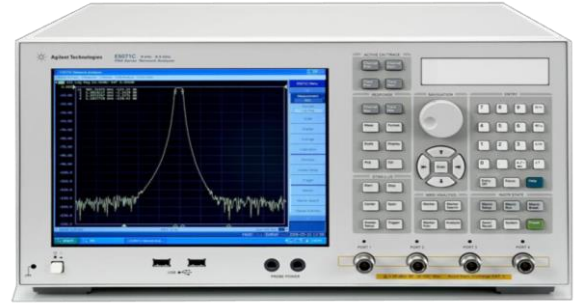


**R&S CMW500**  
 Wireless Communication Tester


- GSM/3G/4G
- Wi-Fi/ BT
- NB-IoT

**KEYSIGHT E5071C**  
 Vector Network Analyzer


- Frequency: 100 kHz~8.5GHz

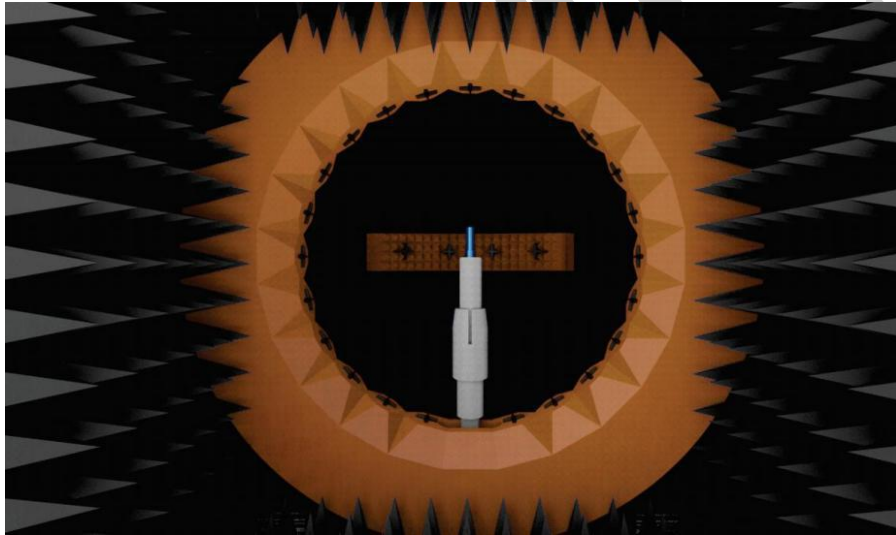


Coordinate system – Cylindrical geometry

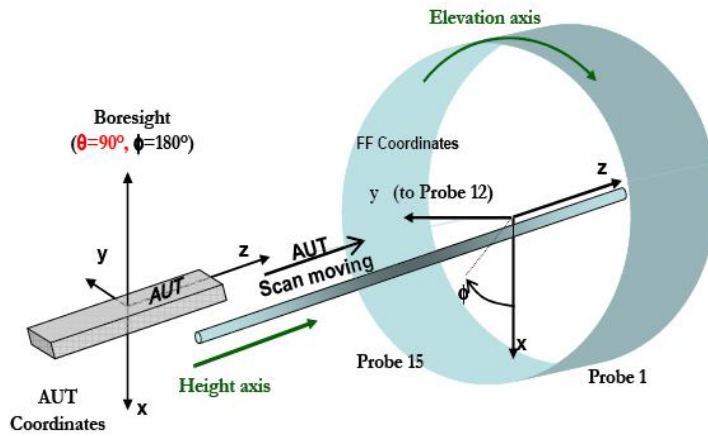

## Coordinate system – Spherical geometry

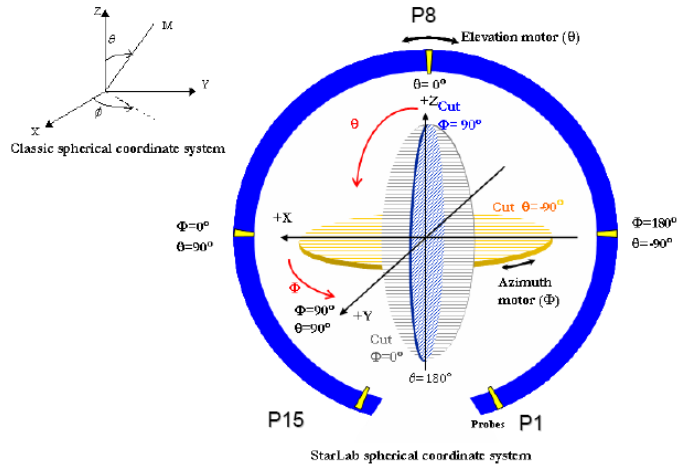

## 4 Matching Circuit Description

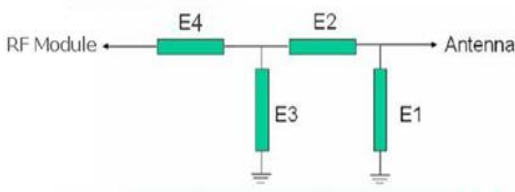

Element	Value
E1	N/A
E2	N/A
E3	N/A
E4	N/A

## 5 Assembly Description

Antenna Attachment Position




SDMC

## 6 Passive Parameter Test

### 6.1 VSWR


#### 6.1.1 Wi-Fi Ant-A

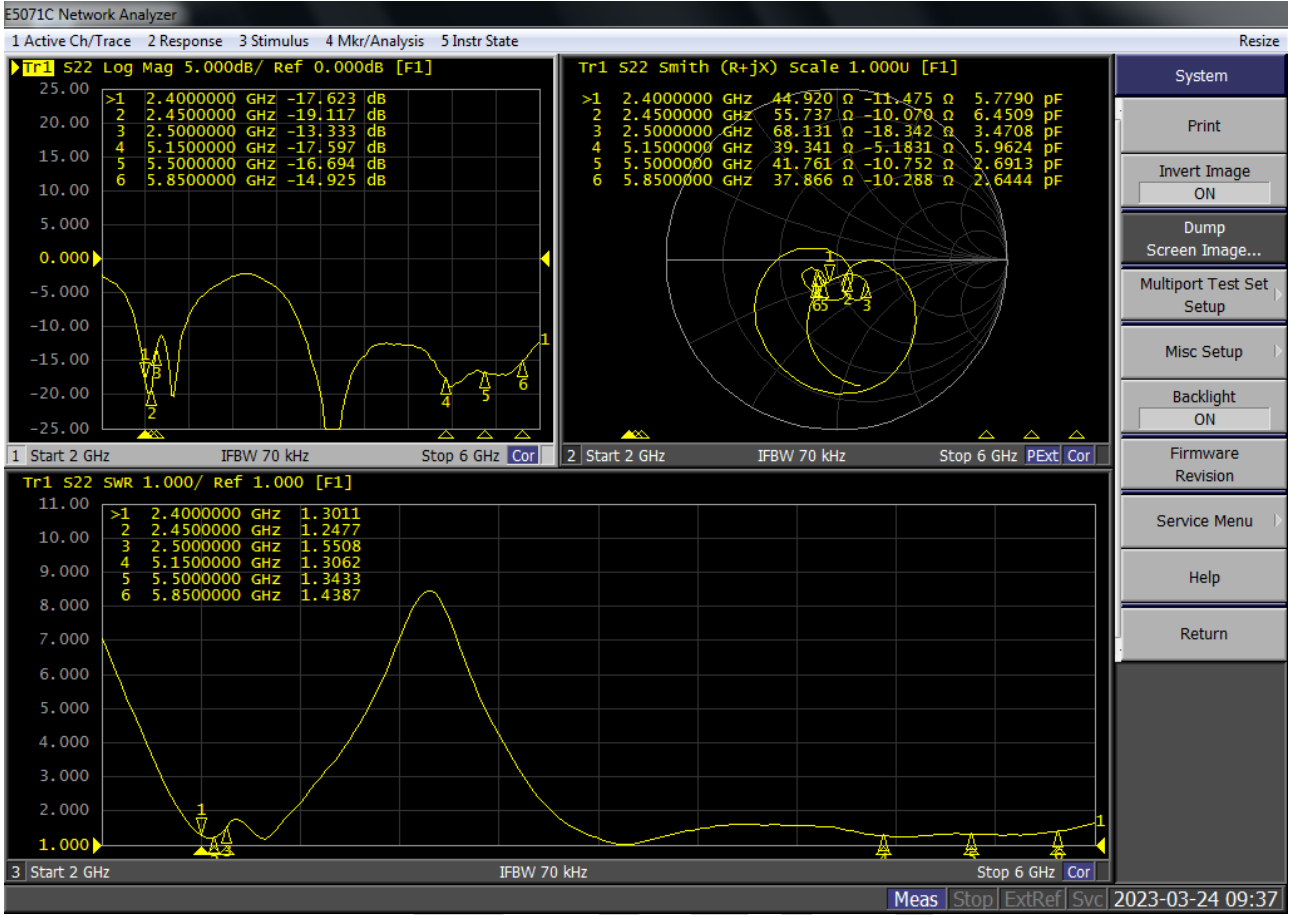

Freq/GHz	2.4	2.45	2.5	5.15	5.5	5.85
VSWR	1.3	1.2	1.5	1.3	1.3	1.4


### 6.1.2 Wi-Fi Ant-B



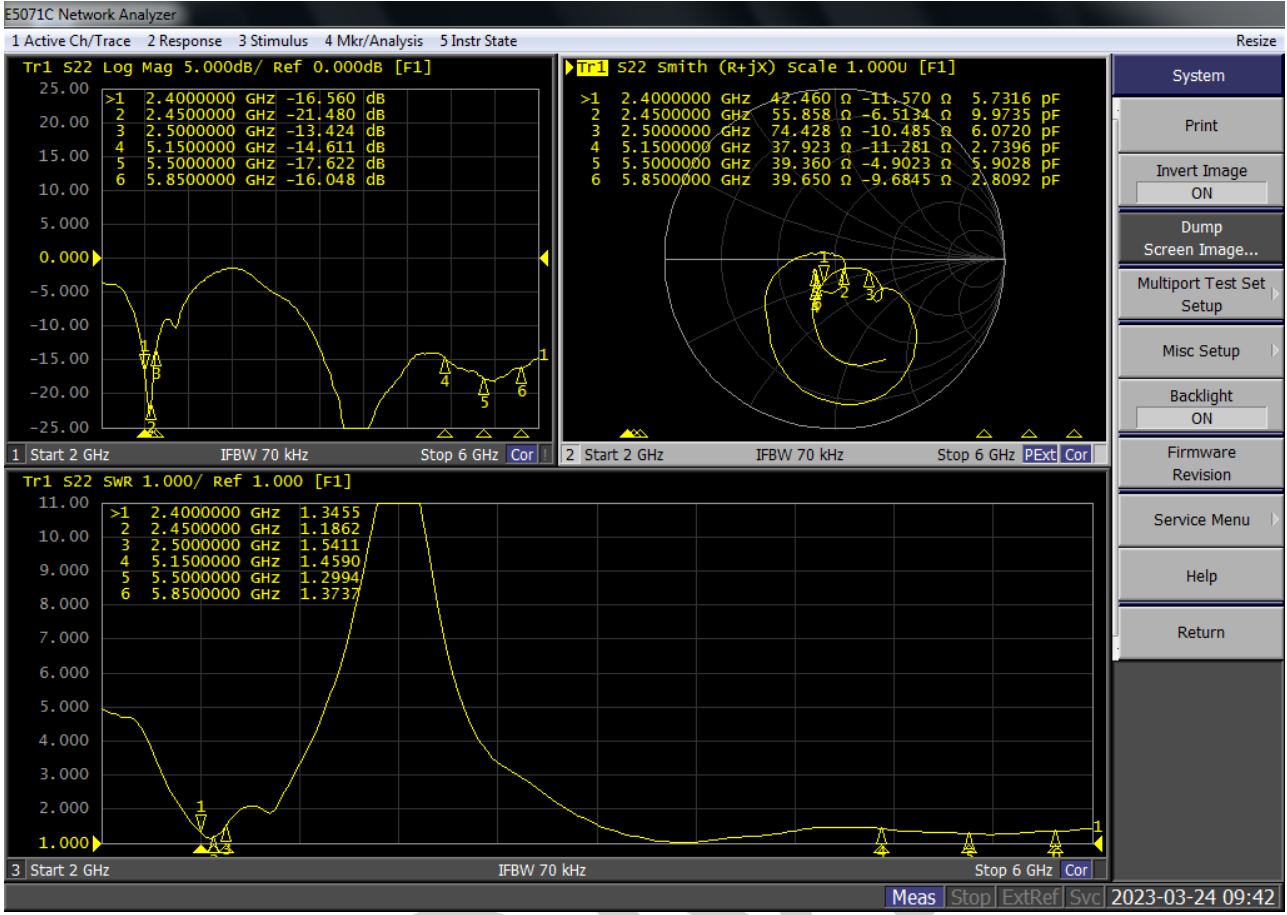


## 6.2 Isolation

## 6.2.1 Wi-Fi Ant-A & Wi-Fi Ant-B Isolation

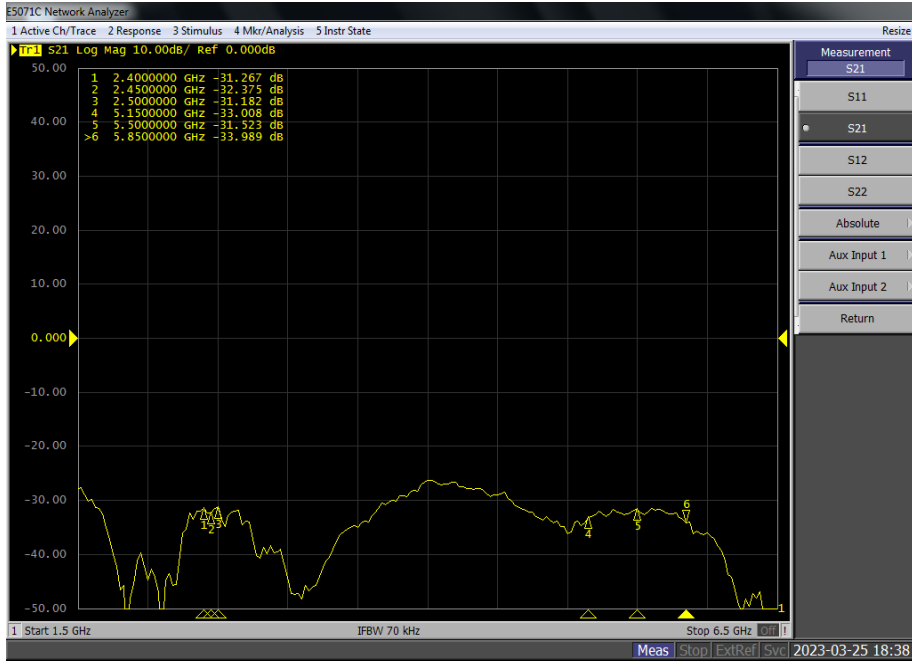


Freq/GHz	2.4	2.45	2.5	5.15	5.5	5.85
S21/ dB	-31	-32	-31	-33	-31	-33

## 6.2.2 Wi-Fi Ant-A & BT Ant Isolation

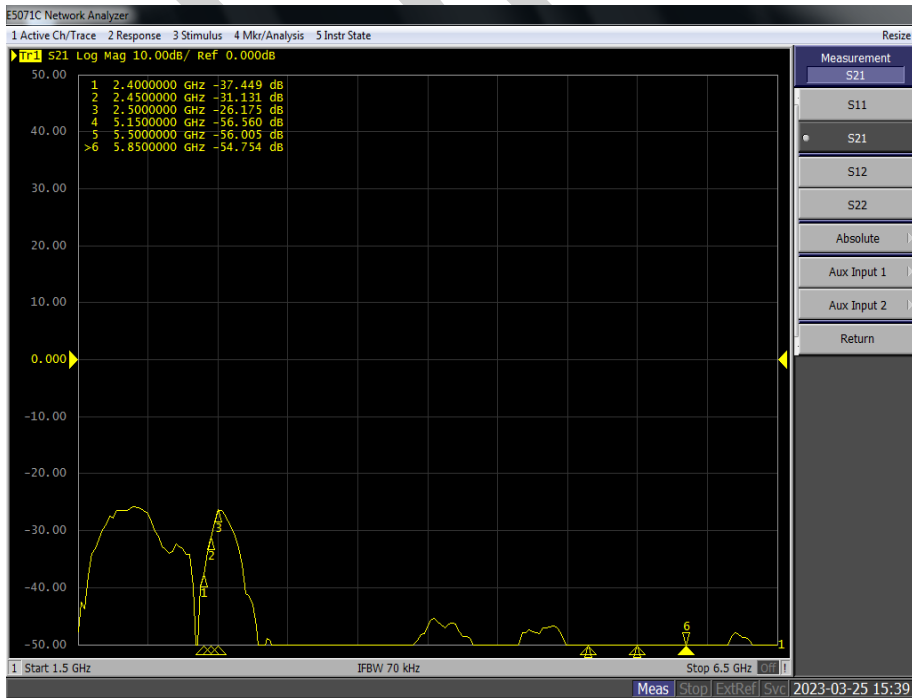

Freq/GHz	2.4	2.45	2.5	5.15	5.5	5.85
S21/ dB	-37	-31	-26	-56	-56	-54

### 6.2.3 Wi-Fi Ant-B & BT Ant Isolation

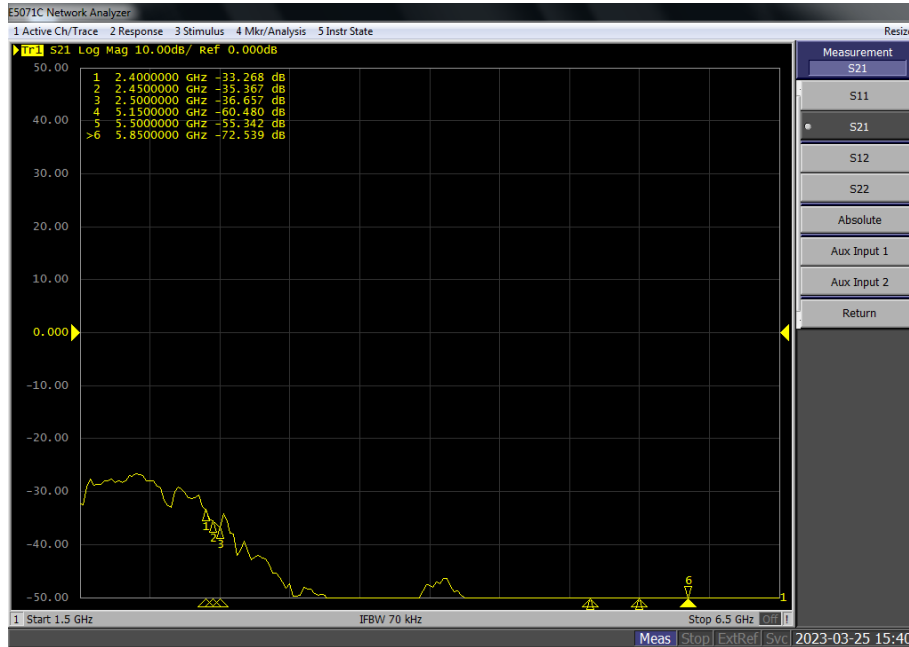

Freq/GHz	2.4	2.45	2.5	5.15	5.5	5.85
S21/ dB	-33	-35	-36	-60	-55	-72

### 6.3 Efficiency & Gain


### 6.3.1 Efficiency & Gain of Wi-Fi Ant-A

Gain&Efficiency of Wi-Fi Ant-A					
2.4G			5G		
Frequency (MHz)	Gain (dBi)	Efficiency (%)	Frequency (MHz)	Gain (dBi)	Efficiency (%)
2400	5.24	64.57	5150	4.71	71.45
2410	5.25	65.46	5200	5.11	70.63
2420	5.22	65.31	5250	5.14	71.94
2430	5.19	64.86	5300	5.33	70.31
2440	5.19	65.31	5350	5.36	72.11
2450	5.15	64.86	5400	5.65	71.61
2460	5.16	65.16	5450	5.52	70.31
2470	5.10	64.57	5500	5.43	67.61
2480	5.10	64.42	5550	5.11	70.15
2490	5.18	64.57	5600	5.22	71.29
2500	5.13	63.1	5650	5.34	69.18
			5700	5.59	68.87
			5750	5.78	68.55
			5800	5.77	69.02
			5850	5.84	71.45

### 6.3.2 Efficiency & Gain of Wi-Fi Ant-B

Efficiency & Gain of Wi-Fi Ant-B					
2.4G			5G		
Frequency (MHz)	Gain (dBi)	Efficiency (%)	Frequency (MHz)	Gain (dBi)	Efficiency (%)
2400	3.16	68.08	5150	4.81	77.62
2410	3.14	71.29	5200	4.67	76.38
2420	3.06	72.44	5250	4.93	75.86
2430	3.06	74.3	5300	5.13	77.62
2440	3.07	75.86	5350	5.4	78.7
2450	3.14	77.62	5400	5.42	80.35
2460	3.19	78.7	5450	5.44	78.7
2470	3.22	79.43	5500	5.1	77.09
2480	3.21	79.25	5550	5.37	76.74
2490	3.24	78.52	5600	5.54	76.21
2500	3.29	76.74	5650	5.55	74.47
			5700	5.53	76.56
			5750	5.44	73.79
			5800	5.15	70.79
			5850	5.14	71.12

## 6.4 Reference Coordinate System

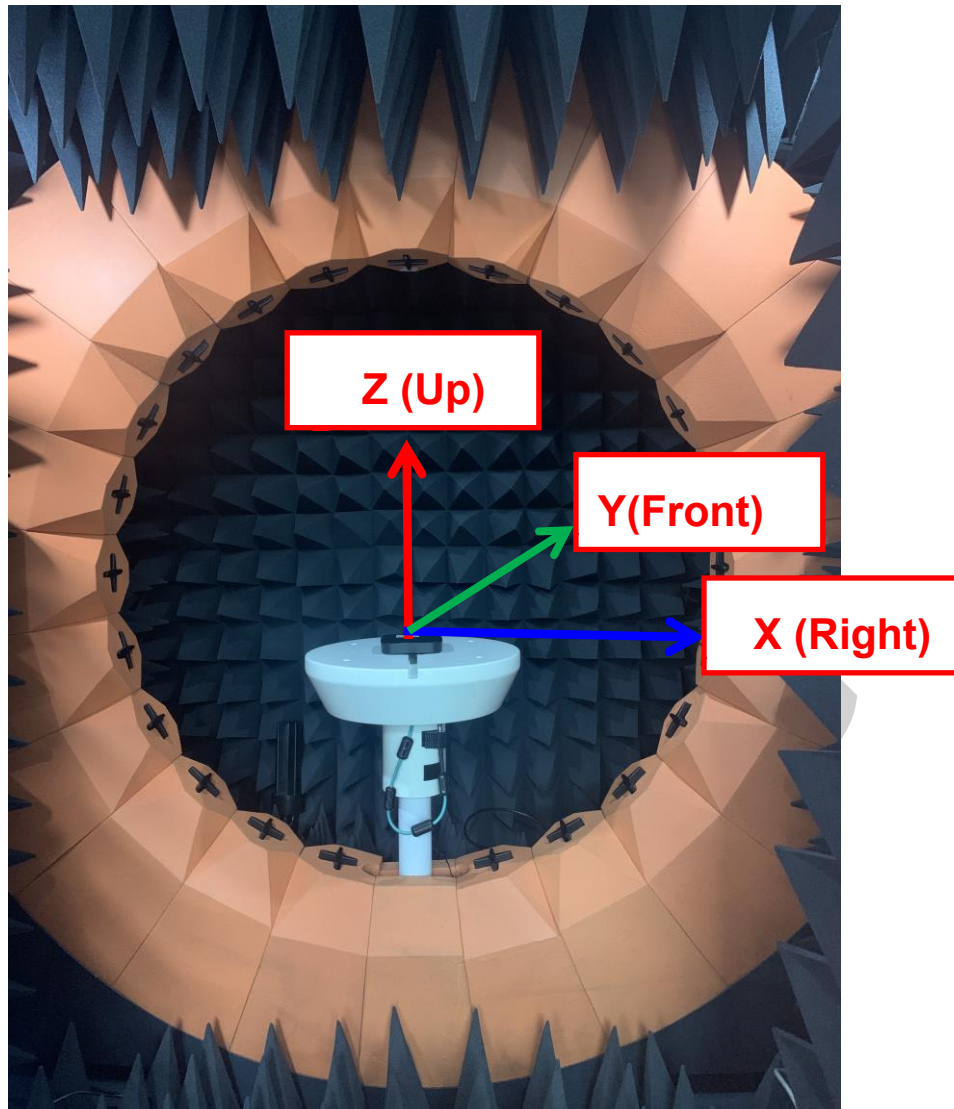


	XY	XZ	YZ
0°	Right	Up	Up
90°	Front	Right	Front
180°	Left	Down	Down
270°	Back	Left	Back

## 6.5 2D & 3D Radiation Pattern


## 6.5.1 Wi-Fi Ant-A

### 2.4G



Phi 0:

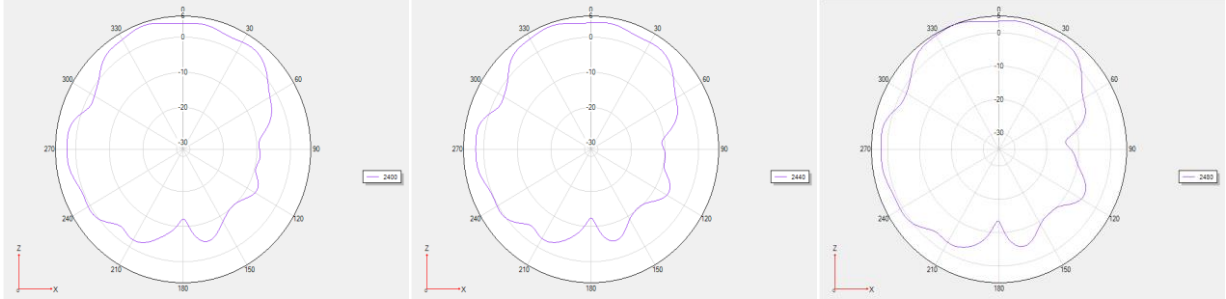

Phi 90:

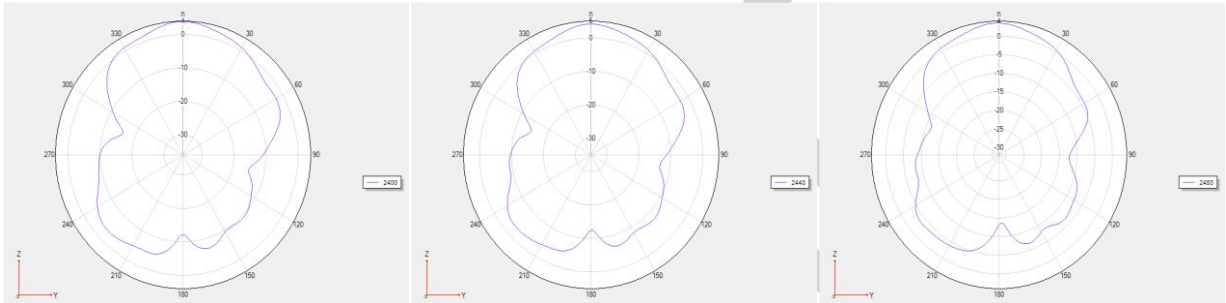


Theta 90:

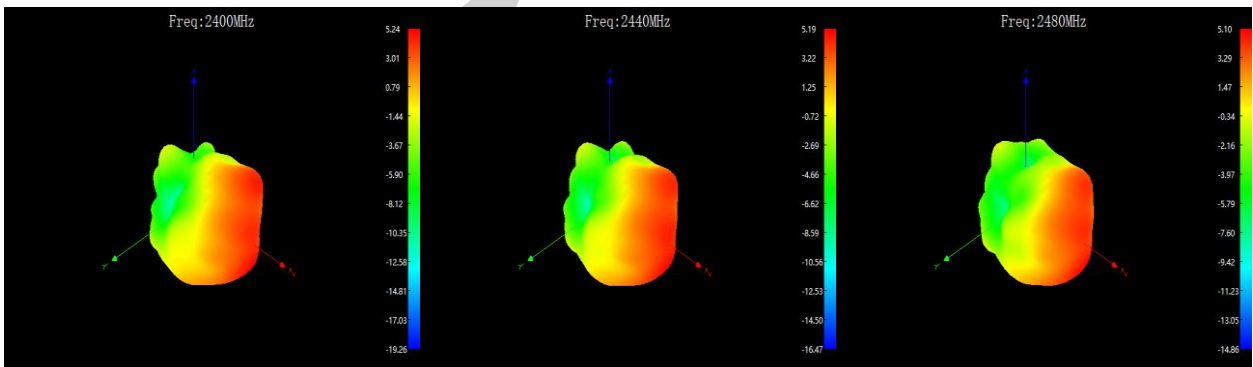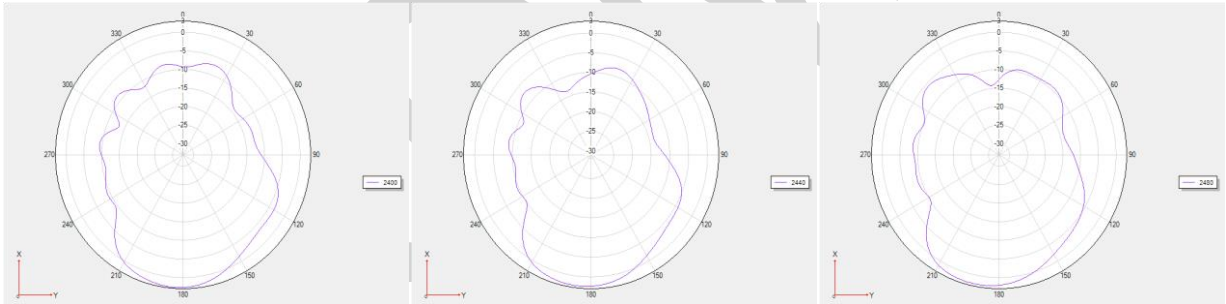


# 5G



Phi 0:

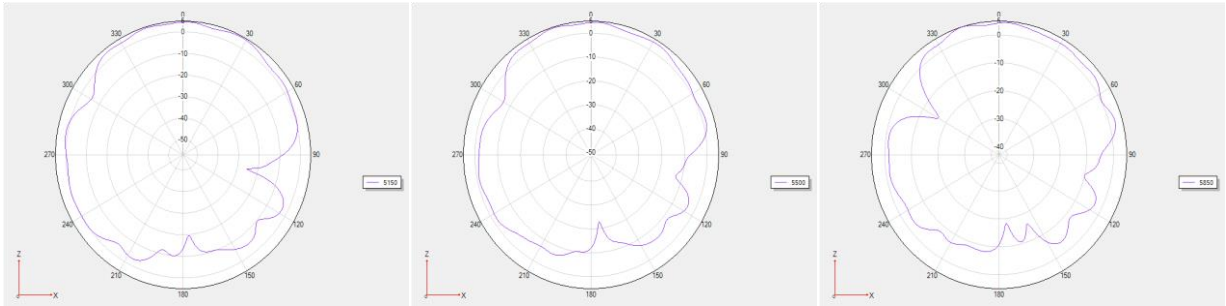

Phi 90:

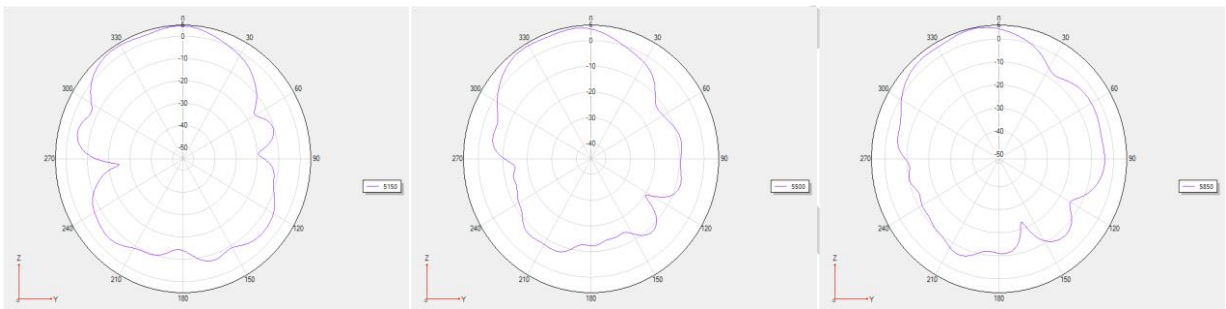

Theta 90:

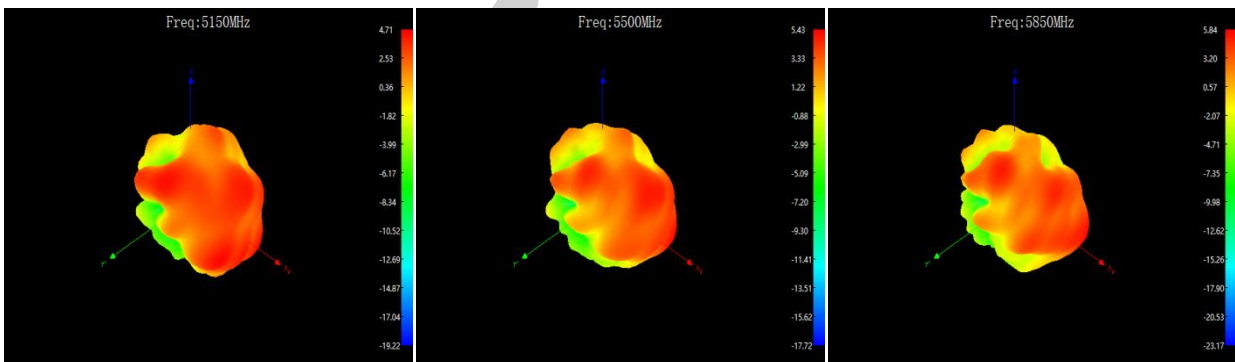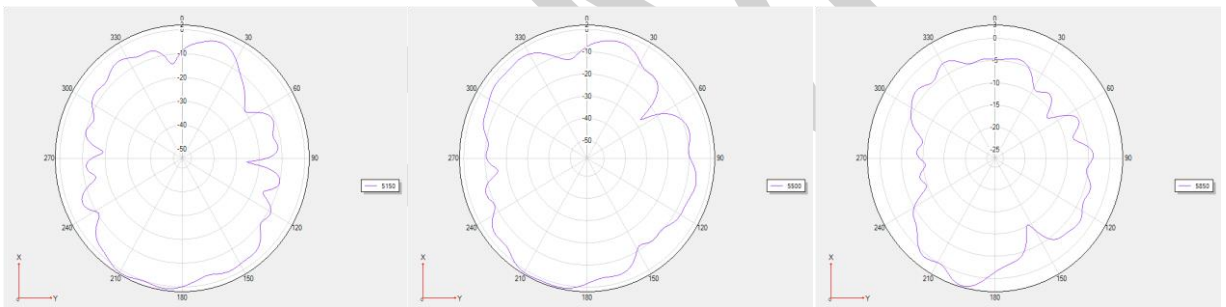


## 6.5.2 Wi-Fi Ant-B




## 2.4G



Phi 0:

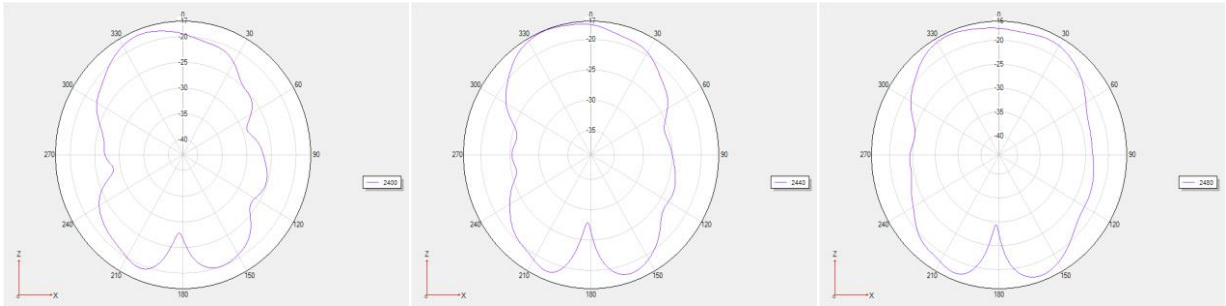

Phi 90:

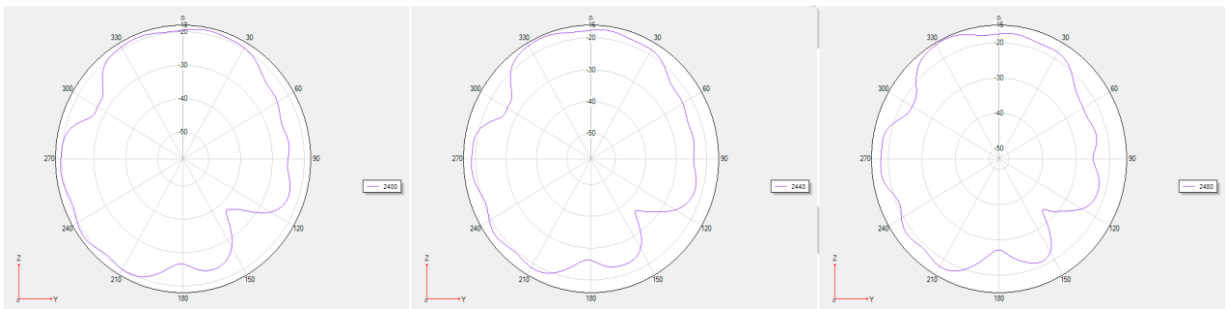


Theta 90:

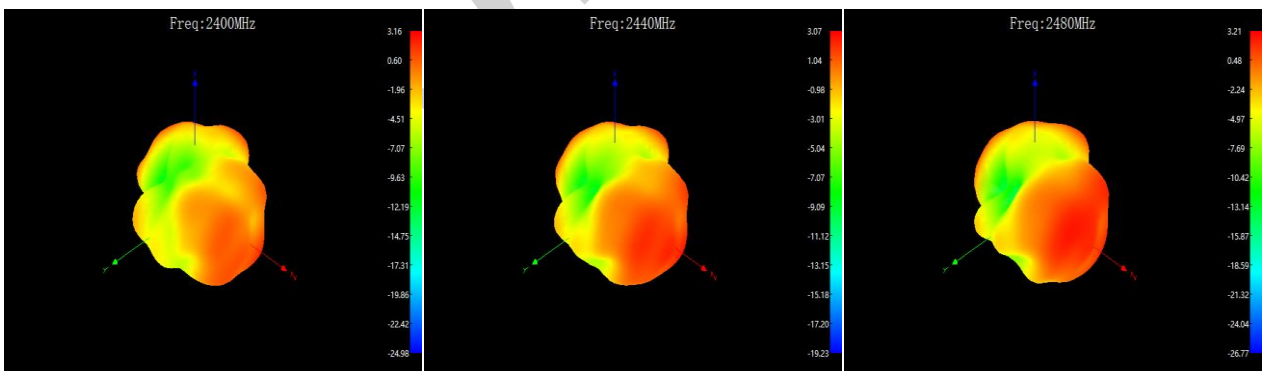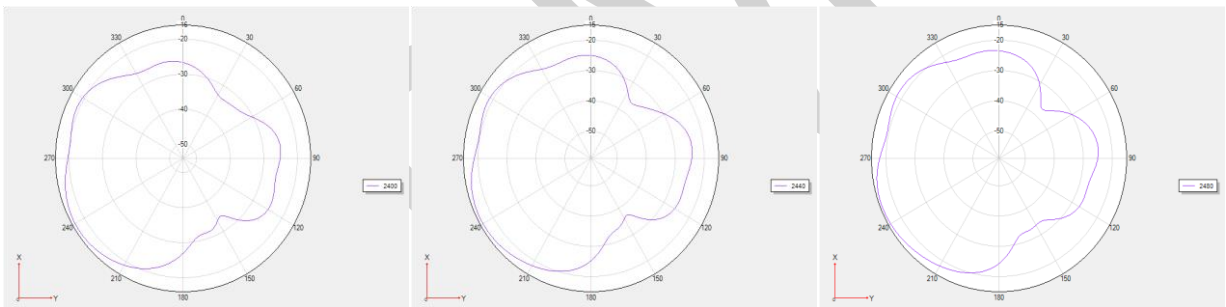


## 5G



Phi 0:

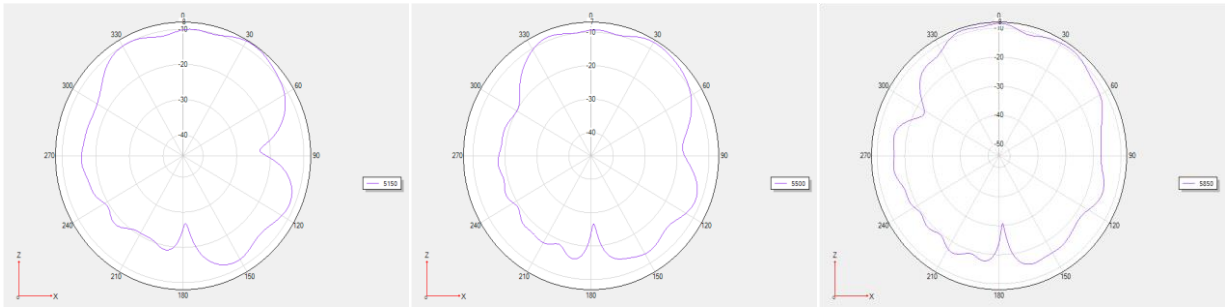


Phi 90:

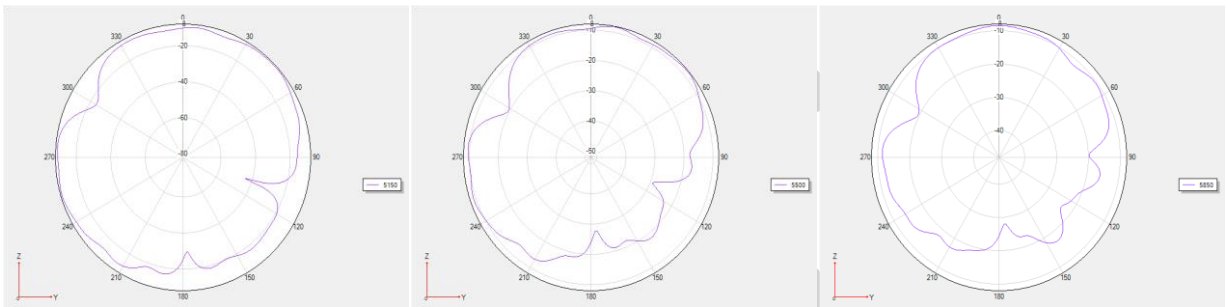


Theta 90:

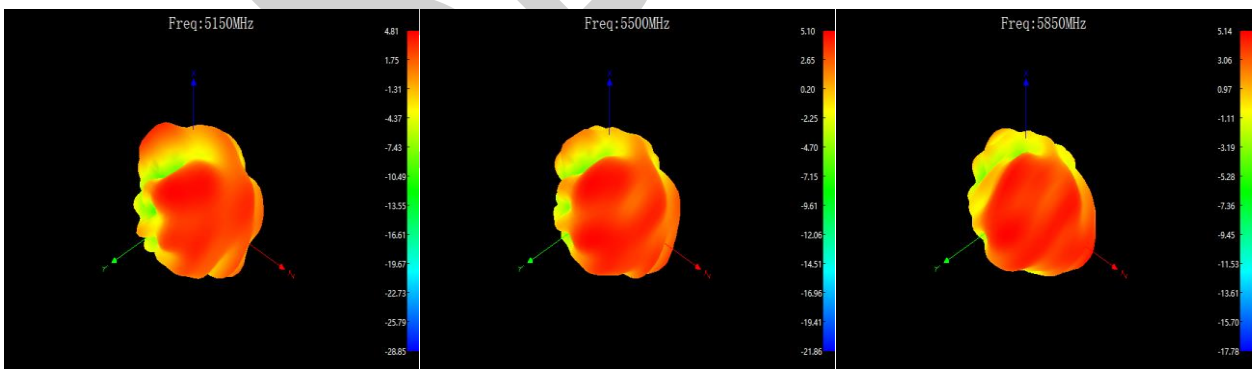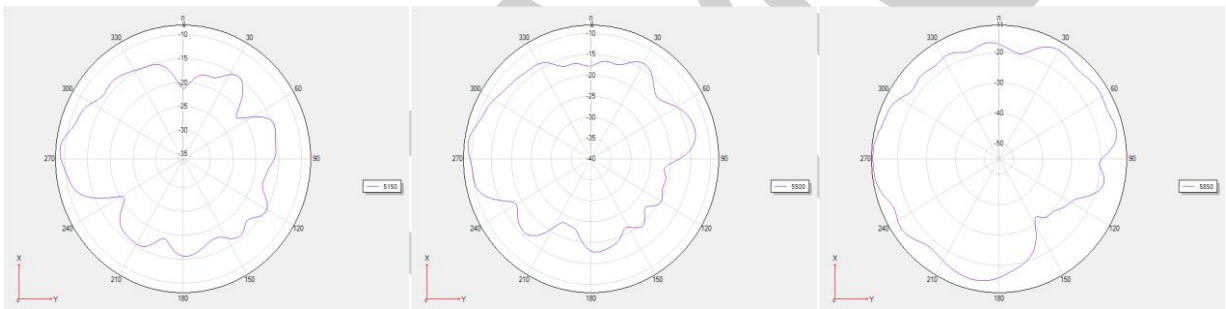

# 6 Drawing

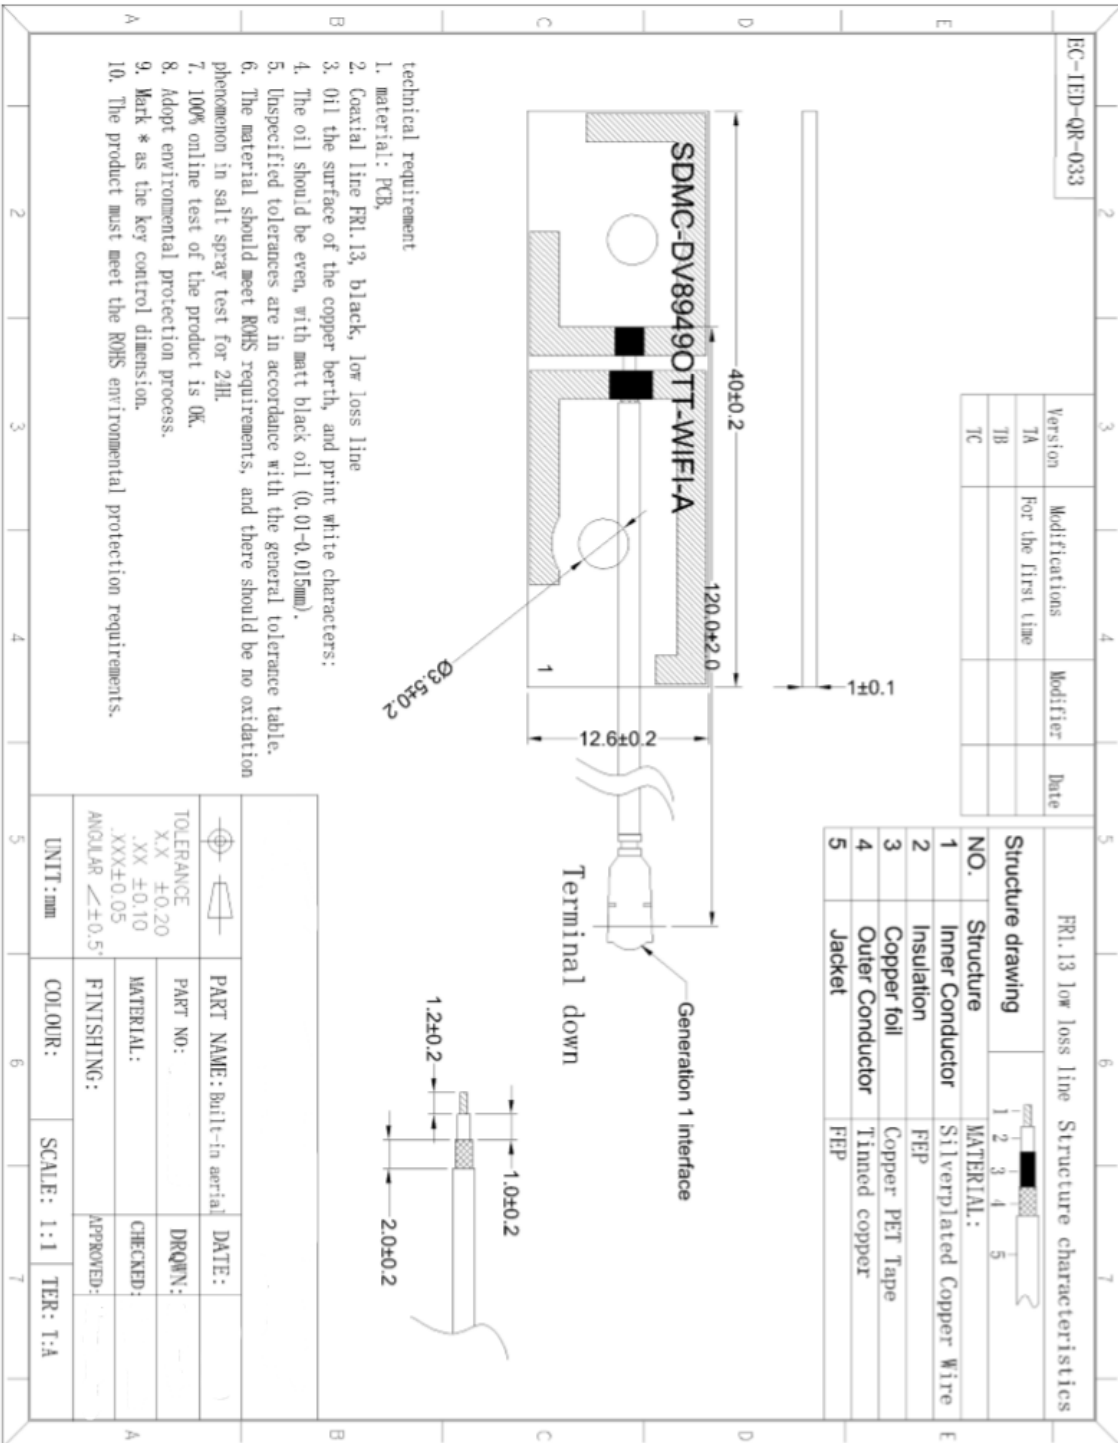

Wi-Fi Ant-A

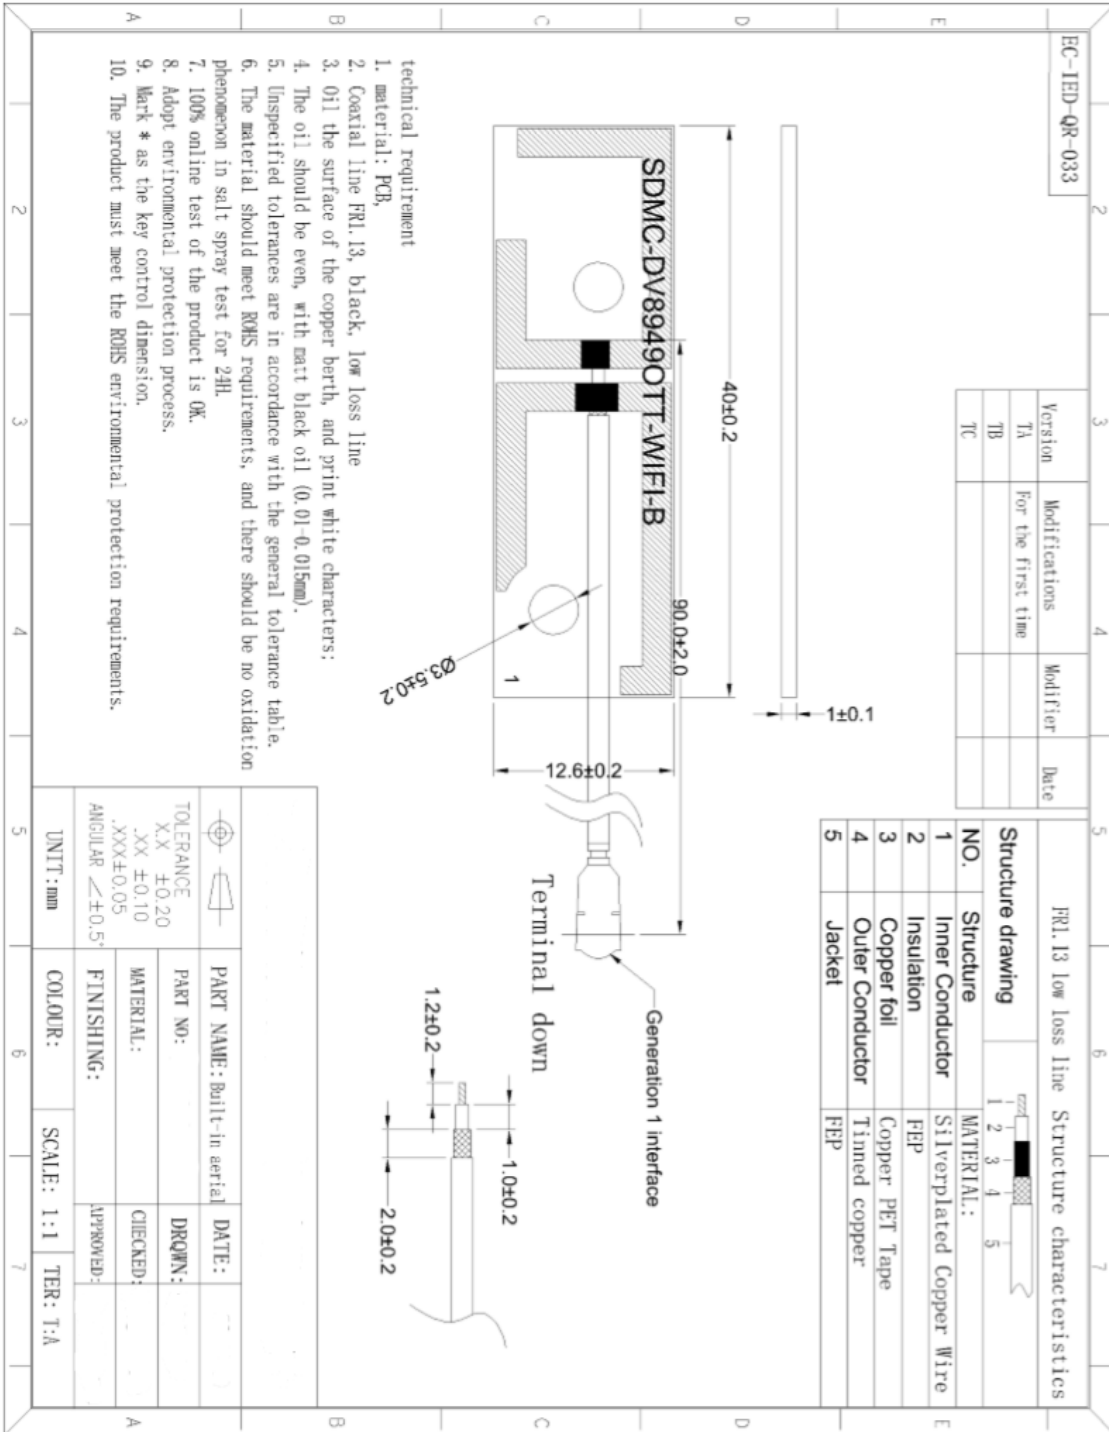

Wi-Fi Ant-B