

# User Manual

*Smart Switch (single)*  
*S01*

## Contents


Part 1: General.....	3
1.1. Specification .....	3
1.2. Main Features .....	3
Part 2: Connect The Smart Plug to Wi-Fi.....	4
Part 3: Connect The Smart Plug to Alexa .....	13
Part 4: Connect Your Smart Plug to Google Home.....	16

## Part 1: General

### 1.1. Specification

Item	Description
Product Name	Smart Switch (single)
Model	S01
Color	White
Voltage	100V-220V
Current	Max 15A
Wattage	Max 1500W (for 110V), 3300W (for 220V)

### 1.2. Main Features

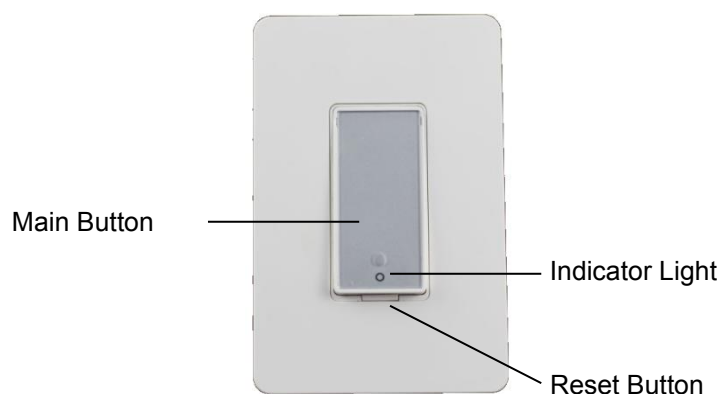

- ◆ Works with Alexa and Google Assistant, Voice Control it ON/OFF
- ◆ ONLY works with 2.4 GHz Wi-Fi, DO NOT use it under 5GHz
- ◆ FREE iOS and Android App is available to control this smart switch anywhere
- ◆ Schedule and Timing the Smart switch to automatically turn on/off
- ◆ Manually Turn on/off the plug by the Main Button
- ◆ Reset the Switch

## Part 2: Installation

### Notice:



1. As the switch needs power for itself, three lines must be connected (one Live Line, one Load Line and one Neutral Line);
2. Please use the wire nuts to make the copper conductors fully concealed;
3. If you really cannot find out a Neutral Line in your Powerline Socket, **STOP** installing the switch and consult with a professional electrician or contact our service team.

**Step 1:** Turn off power at the circuit breaker that controls the light switch. Use voltage tester to confirm no voltage is present.

**Step 2:** Remove existing faceplate and light switch, then identify Live/Load, Neutral and Ground lines.

**Step 3:** Connect the Smart Switch wiring with the provided wire connectors as follows :



- Two **black wires** from the switch to the available Live lines via the wire nut, and wrap electrical tape around the wire nuts to make sure the copper conductor is fully concealed.
- **Green** wire on switch (Ground line) to Ground line,
- **White** wire on switch (Neutral line) to Neutral line.).

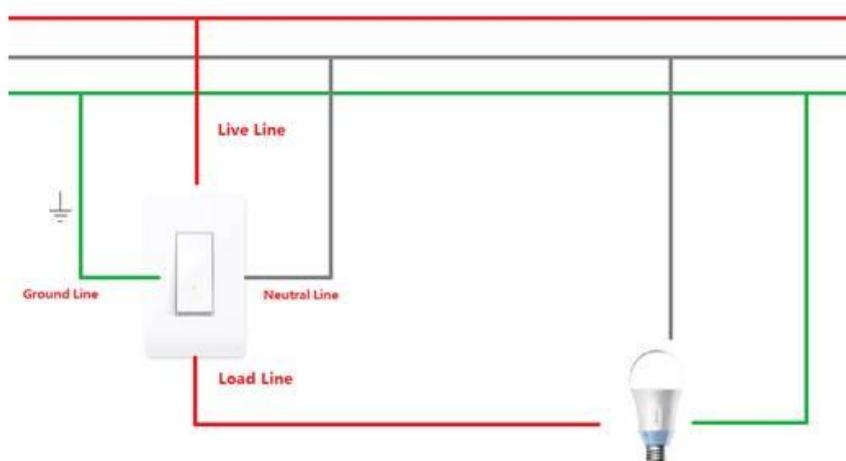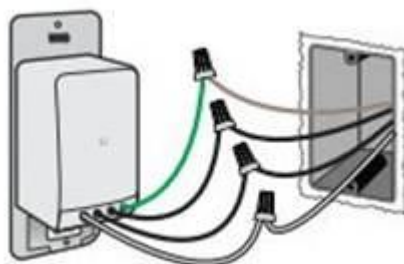


## Part 3: Connect The Smart Switch (single) to Wi-Fi

### Step 1: Download the App

Scan the QR code or search “Smart life” in the App Store or Google Play

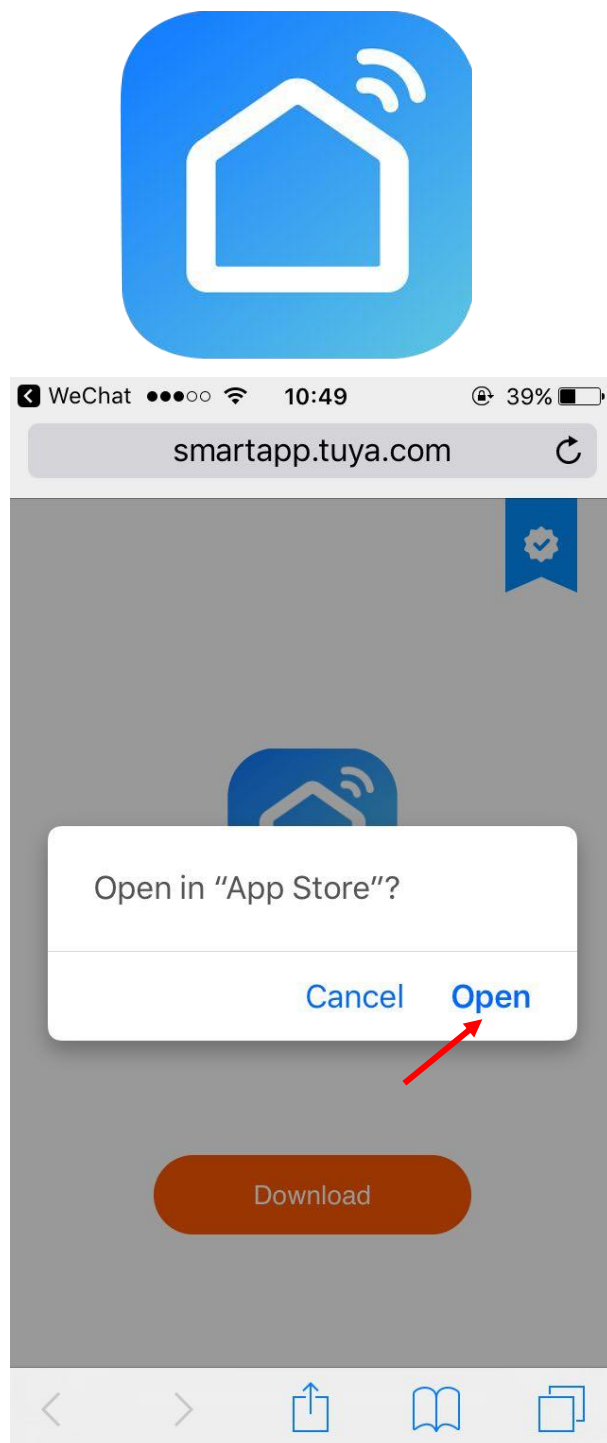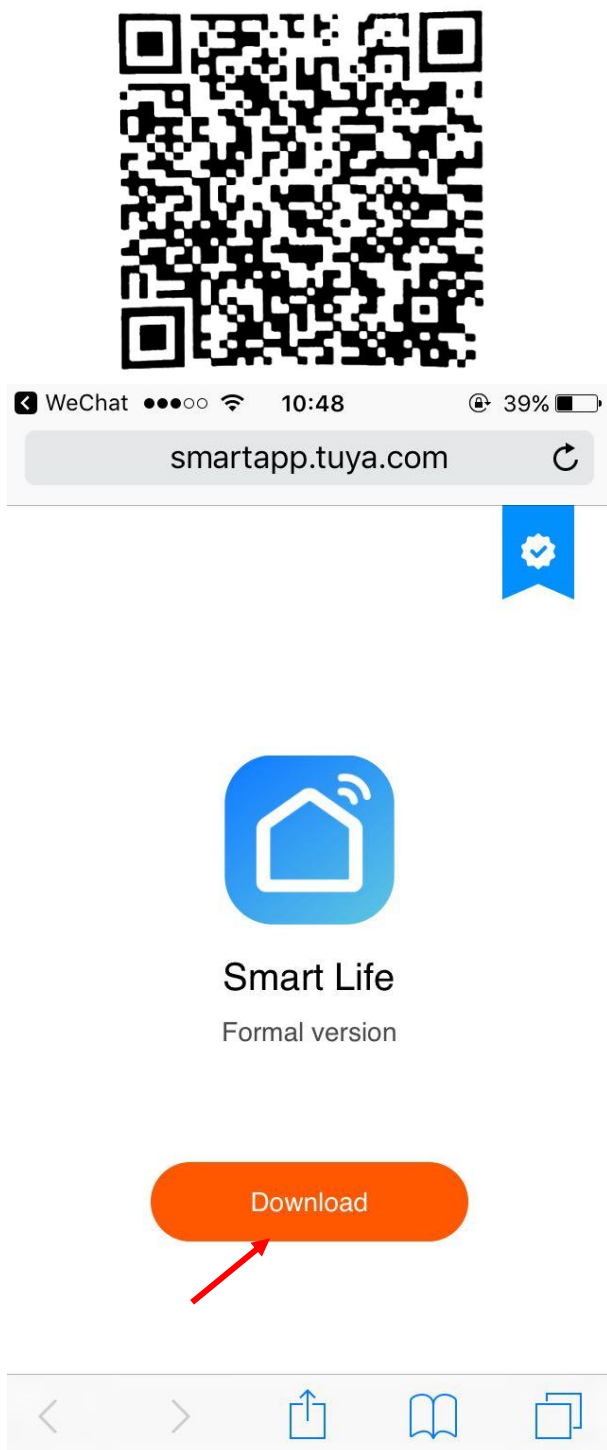

**Step 2: Register a New Account**

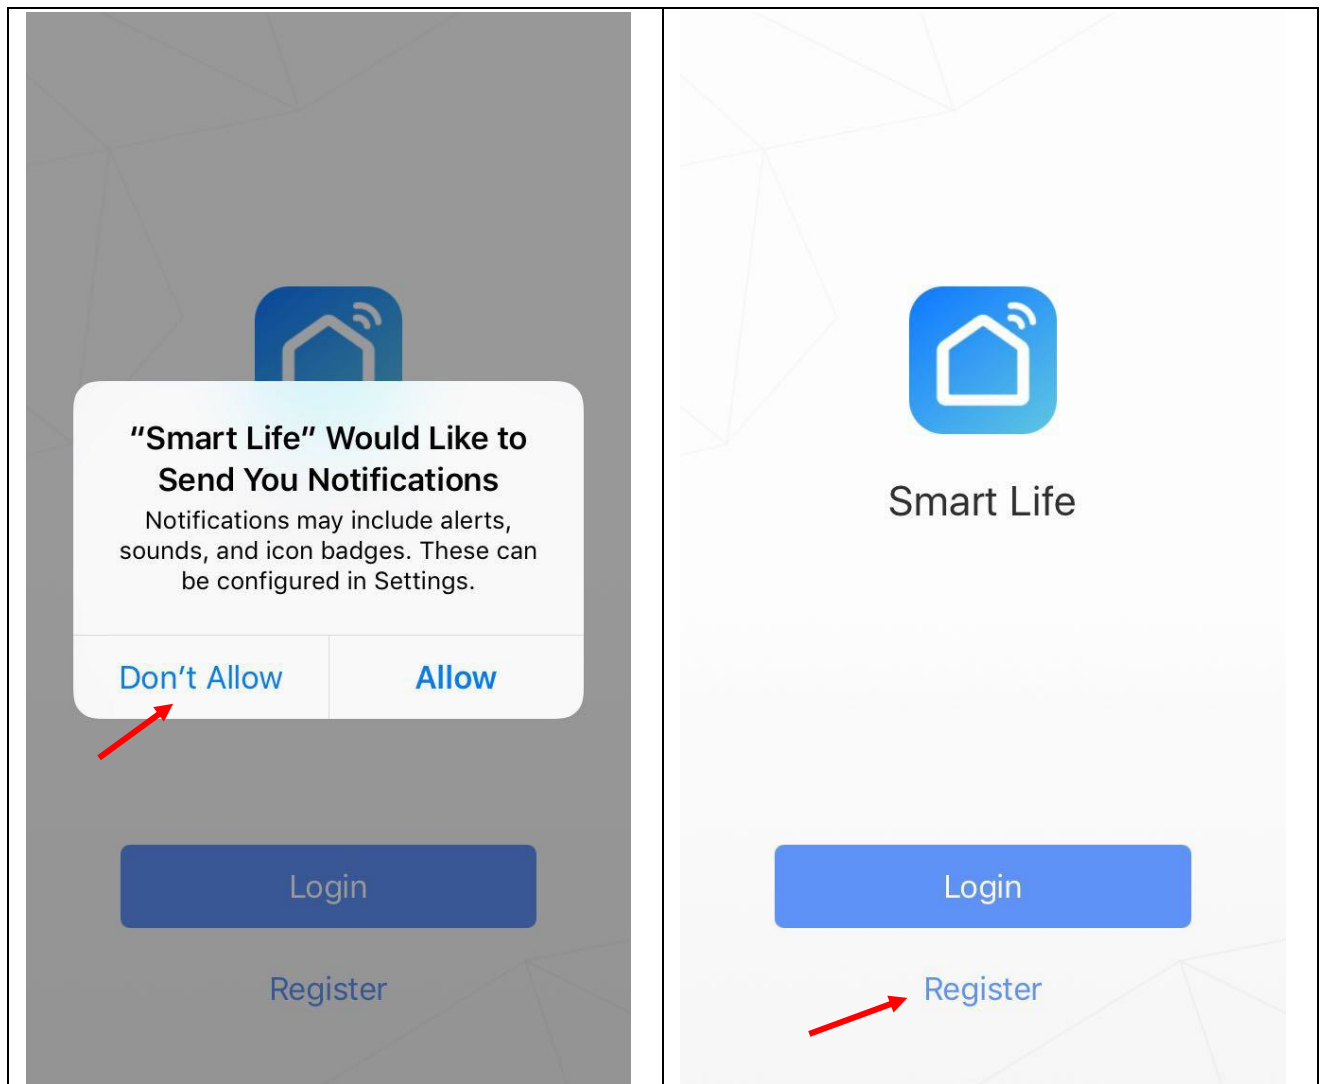


Part 3: Connect The Smart Switch (single) to Wi-Fi


<p>●●●●○ 中国电信 11:01 33%</p> <p>&lt; Back Register</p> <p>USA +1 &gt;</p> <p></p> <p>Next</p> <p>Register and agree with <a href="#">User Agreement and Privacy Terms</a></p> <p><b>Register with phone number or email address</b></p>	<p>●●●●○ 中国电信 11:02 33%</p> <p>&lt; Back Register</p> <p></p> <p>Confirm</p> <p><b>Password must contain 6-20 letters and numbers</b></p> <p>q w e r t y u i o p a s d f g h j k l ⬆ z x c v b n m ⬆ 123 地球 麦克风 space return</p>
--	--

**Step 3:** Turn on the power at the circuit breaker and the indicator light flashes quickly, if not press the reset button under the main switch.

**Step 4:** Press **+** to Add a device in your App  
(Smartphone should connect to 2.4GHz Wi-Fi).

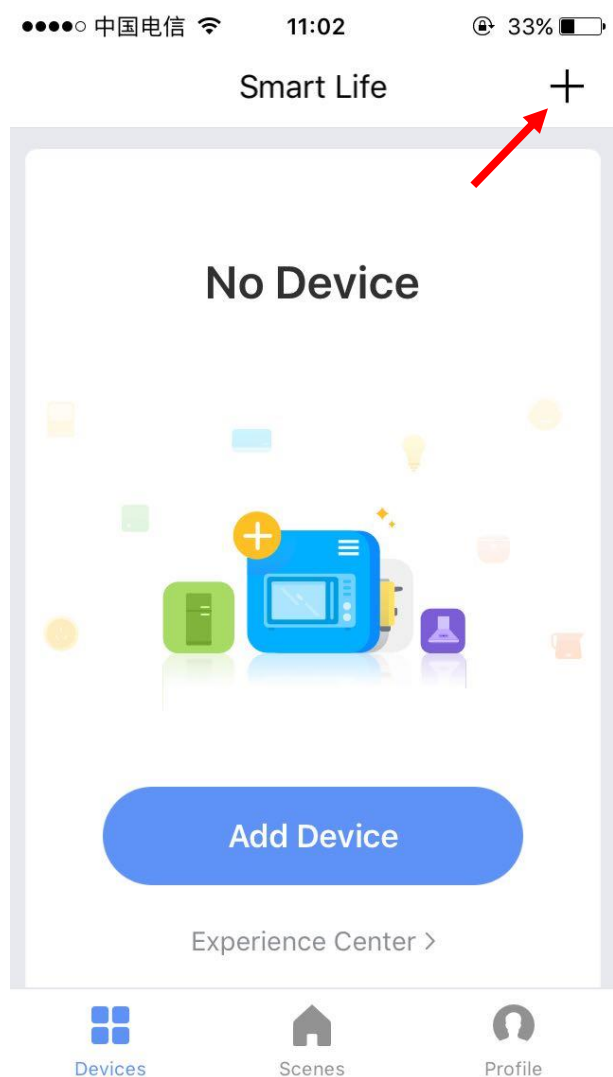

**Step 5:** Select "Wall switch"

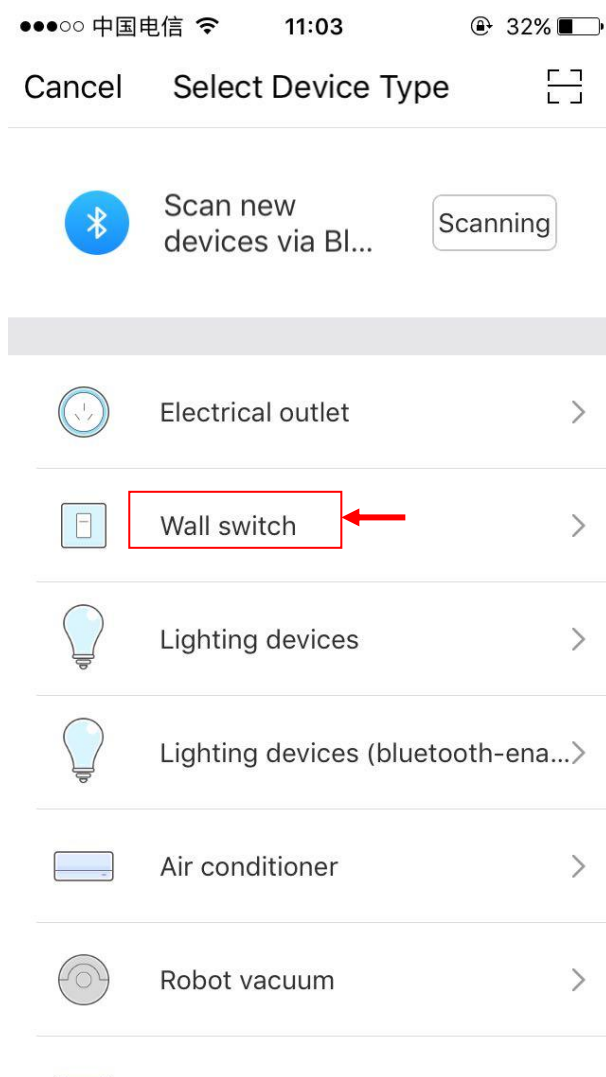




Part 3: Connect The Smart Switch (single) to Wi-Fi

**Step 6:** Confirm the indicator

●●●○ 中国电信 11:04 32%

< Back Add Device AP Mode

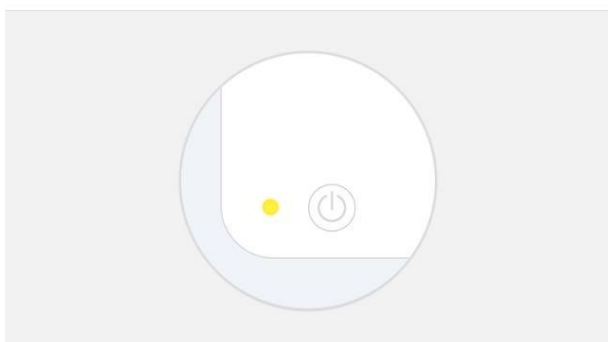

Power on the device and confirm that indicator light rapidly blinks

[How to make indicator rapidly blink](#)

Confirm indicator rapidly blink

**Step 7:** Enter the Wi-Fi Password (Your phone should be connected to the same Wi-Fi first)

Cancel

Enter Wi-Fi Password



Wi-Fi : S... [Change Network](#)

Confirm


This app is supported only on 2.4GHz Wi-Fi channels




**Step 8:** It will be 100% in around 20 seconds.

**-----If it is failed,**


1. reconnect
2. wait it goes to around 10%,
3. Press the bottom on the plug for 5 seconds, it will blink again. Then release it, the plug will be connected.
4. If the problem continues, repeat step 3 to step 7 and contact the seller for help.

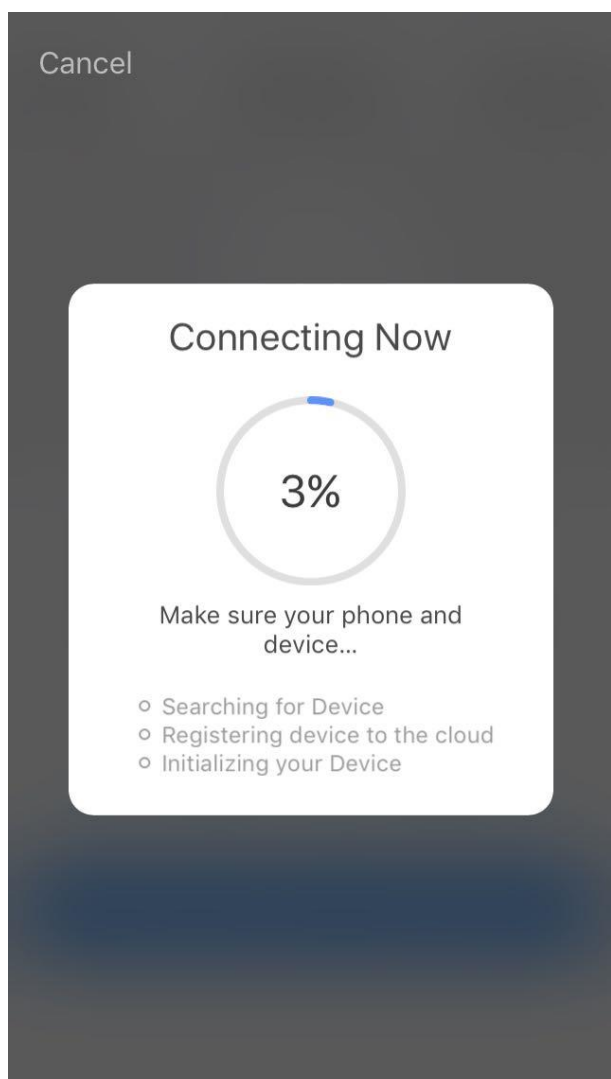


**Step 9:** Edit the name of your smart wall switch

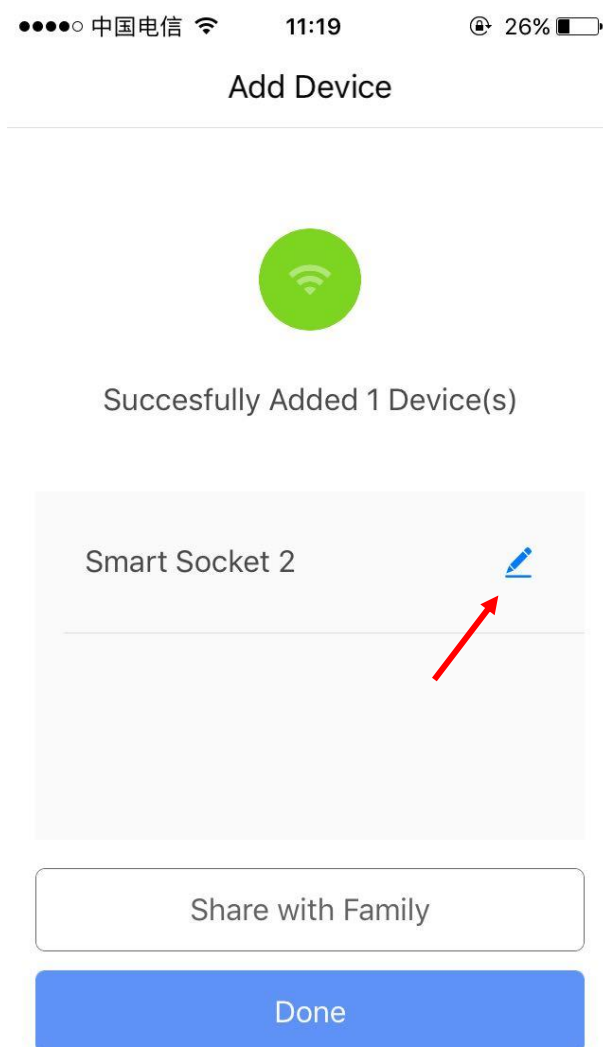

**Step 10:** Delete the default name and input a new one(Simple Names will be identified easily by Echo or Google Home)

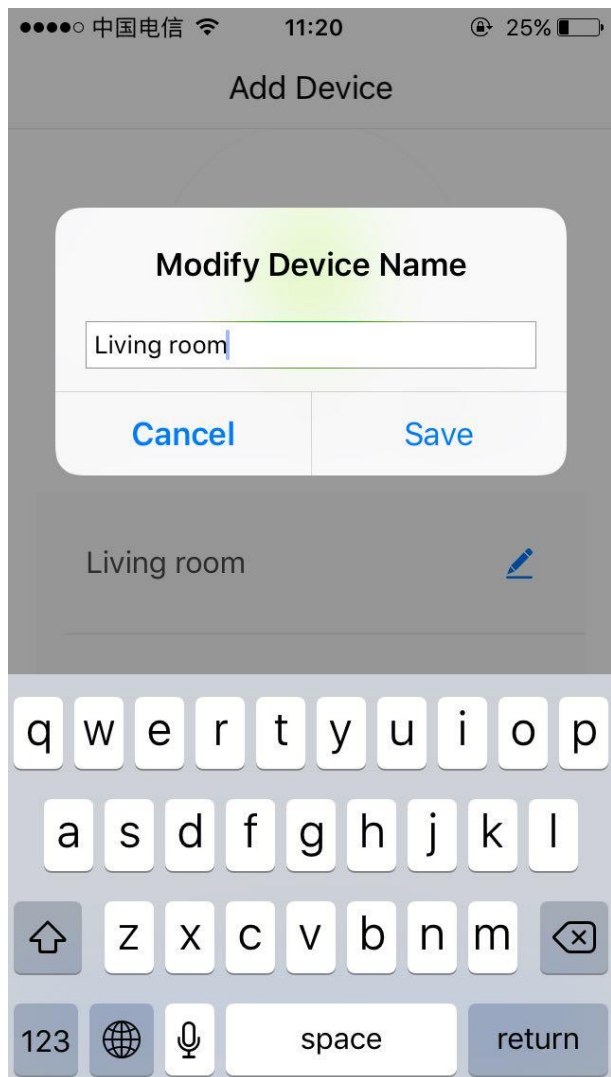

**Step 11:** Press Done

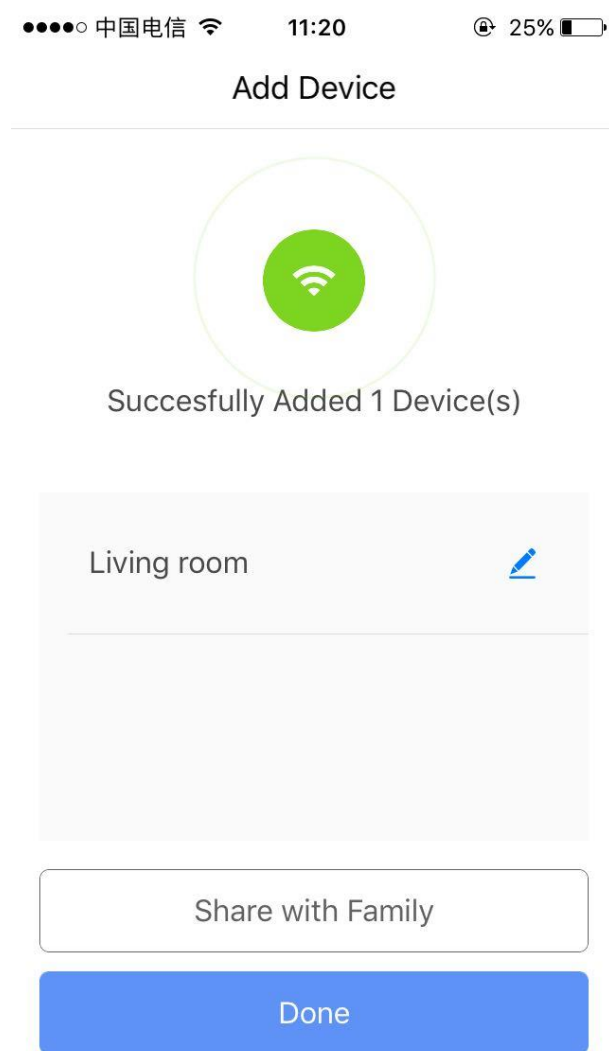

**Step 12:** Your plug is connected and you can control it by this App. If you need voice control, please refer Part 3 for Alexa, Part 4 for Google Assistant.

**Congratulations! Now you can turn on/off the smart wall switch via App on your smartphone.**

**FQA:**

**1. Cannot download the right App.**

**A:** Please come back to step 1 and download by scanning the QR code. Please use smartphone rather than tablet.

**2. Cannot discover the smart wall switch by App.**

**A:** Make sure that your Wi-Fi router is 2.4GHz, the phone connects to the same Wi-Fi, the indicator flashes quickly


**3. No blue light comes out from the indicator button**

**A:** Please check the wire connection and press the reset button if necessary, then the blue light will blink quickly.


### Part 3: Connect The Smart Switch (single) to Alexa




**Step 1:** Log in your Alexa account on a smartphone or a computer, then click Skills

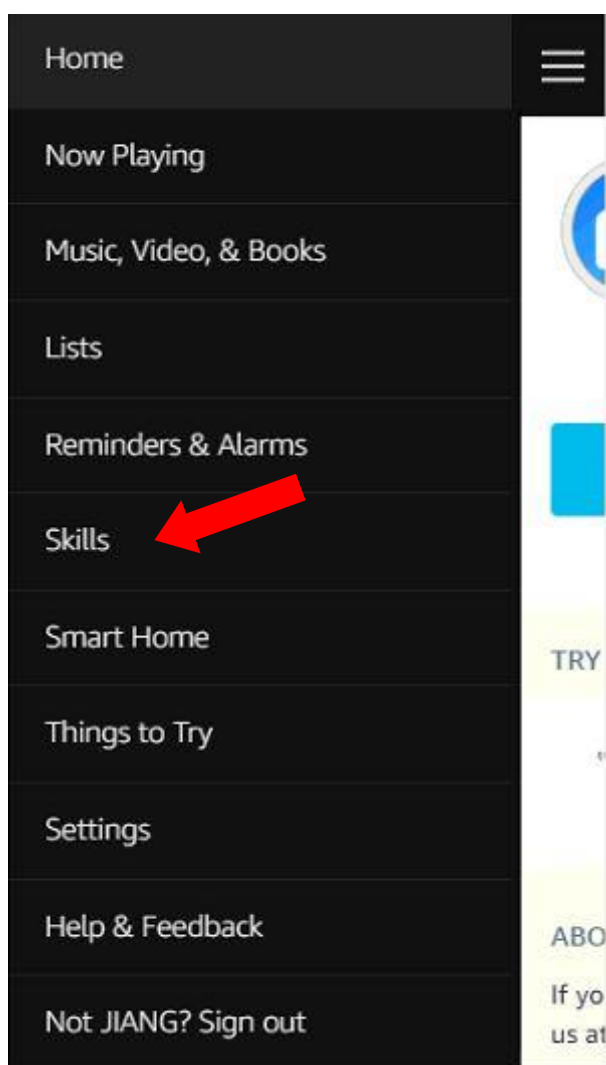


**Step 2:** Search "Smart Life" and select the right one according the blue logo (same with App)

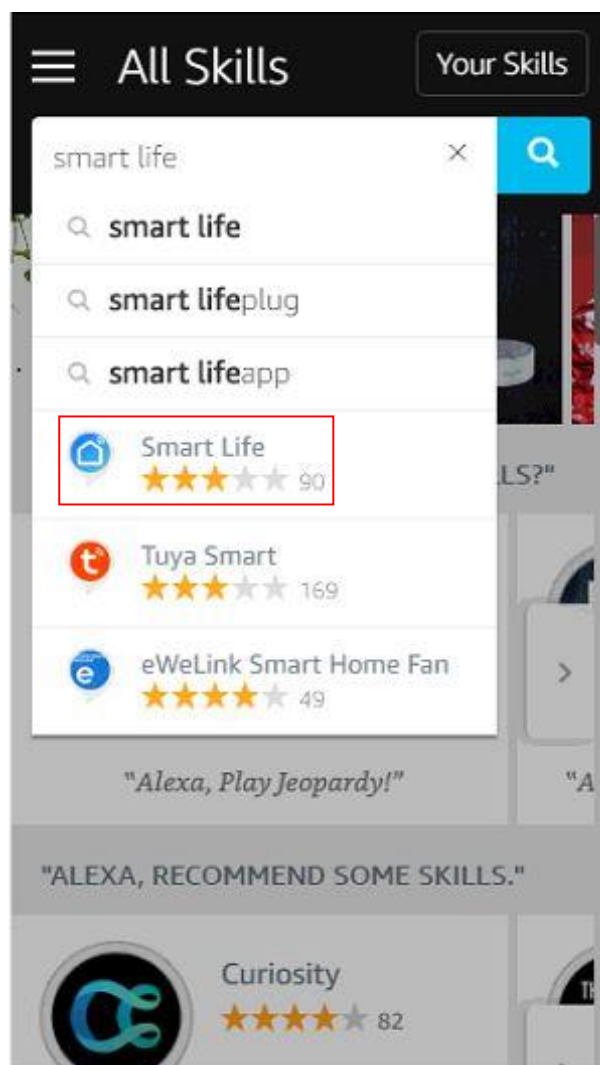

**Step 3:** Enable the skill

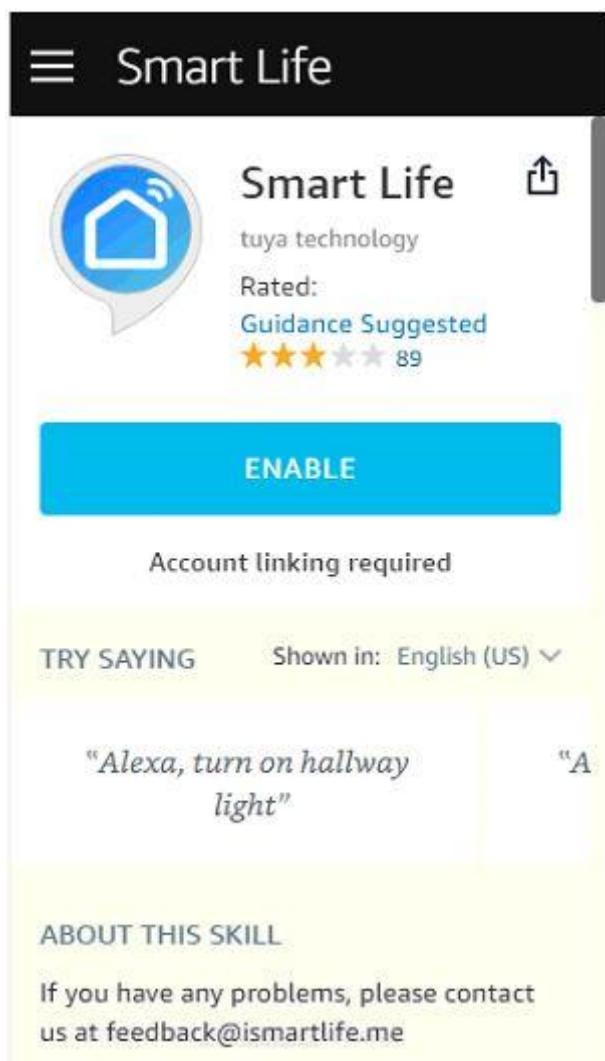


**Step 4:** Login the account you registered on the App in Part 2, then click "Link Now"

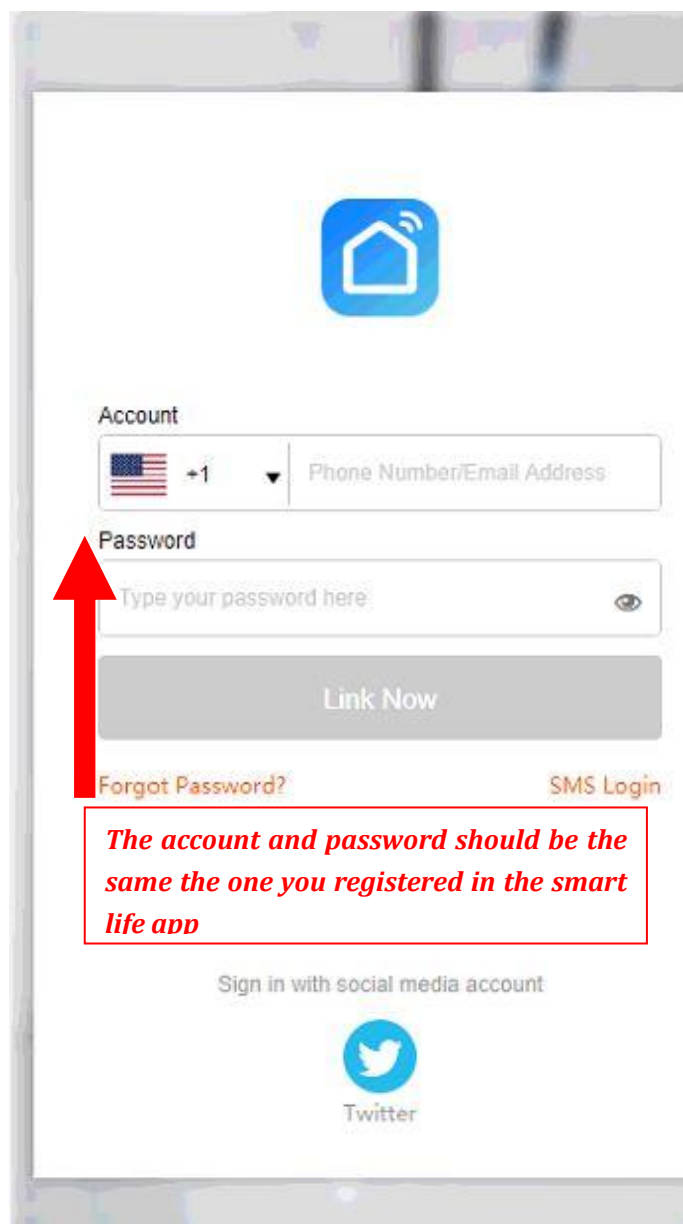

*The account and password should be the same the one you registered in the smart life app*

**Step 5:** The Account is linked successfully, then tap Authorize to Complete.

**Step 6:** Congratulations! You can use Alexa Devices (Echo) to control the Switches you connected in the App.

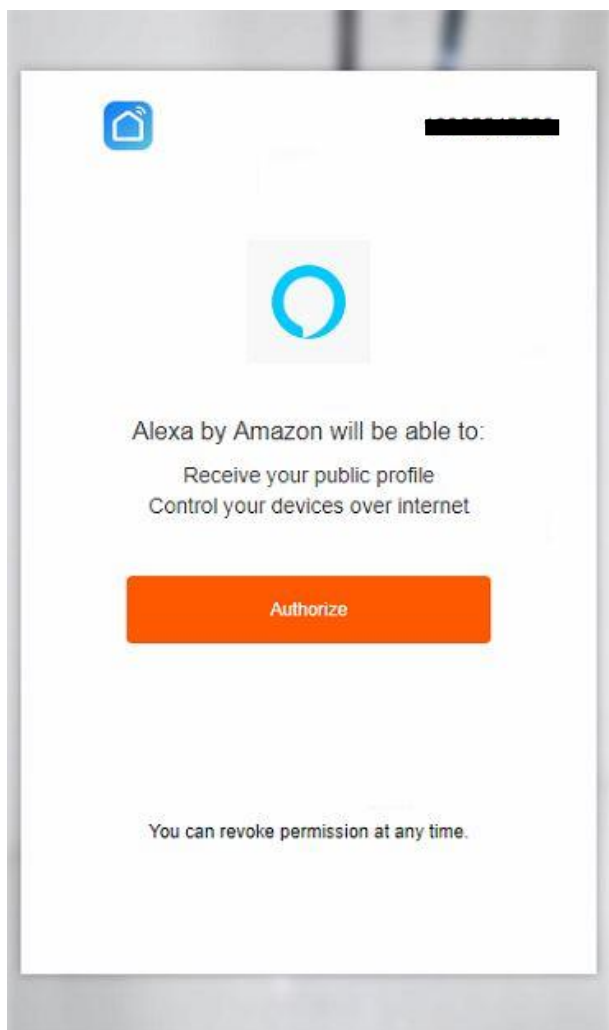


- If you want to delete or add new plugs, please delete or add them in the Smart Life App (Part 2), the Alexa Side will synchronize automatically.
- If you cannot see the name of switches in the Devices List in Alexa Page, you can click "Discover" in Alexa Page, it will synchronize from the Smart Life App.

## Part 4: Connect your Smart Switch (single) to Google Home




Part 2 must be completed before doing this part 4

**Step 1:** Tap "Home Control" in the hamburger menu on the Google Home app's home page, then tap "+".

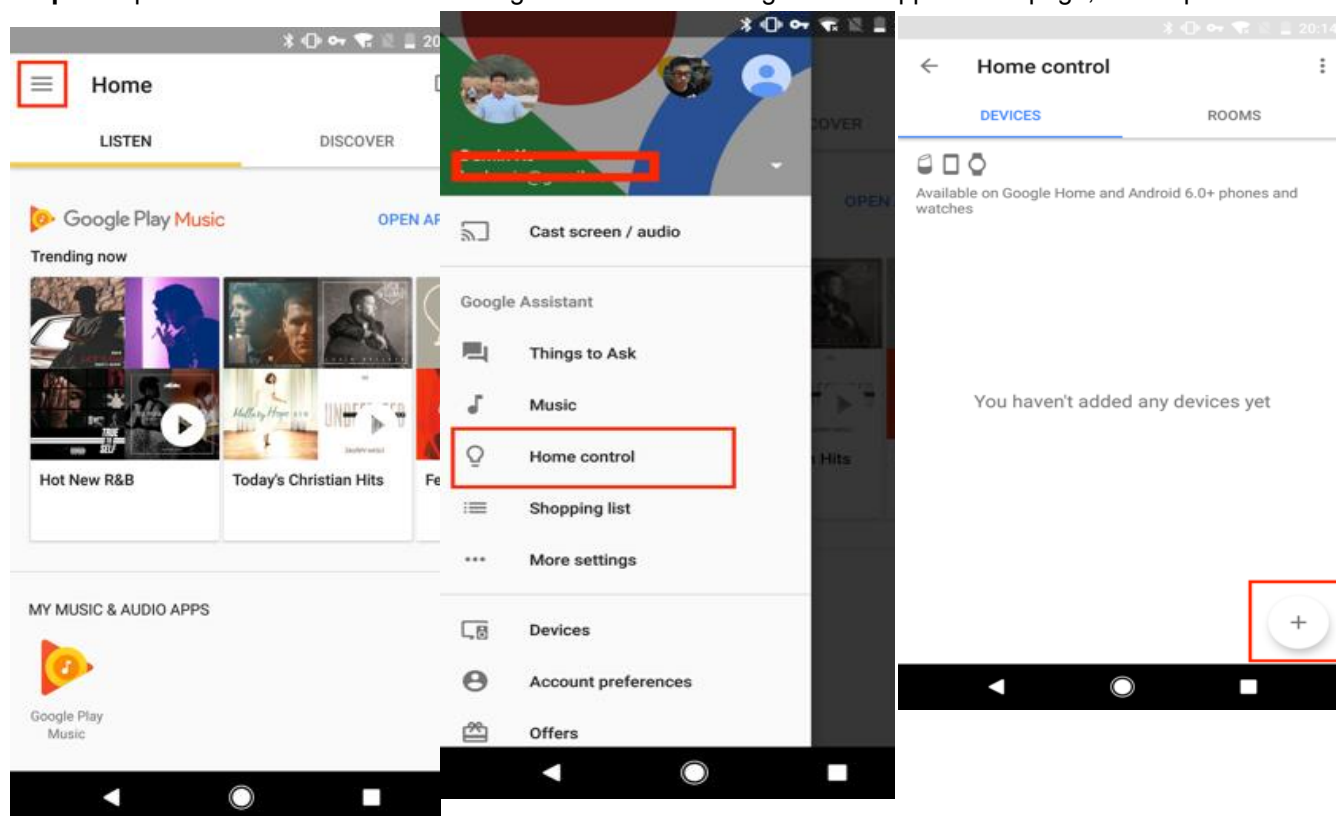





**Step 2:** Find "Smart Life" in the list.

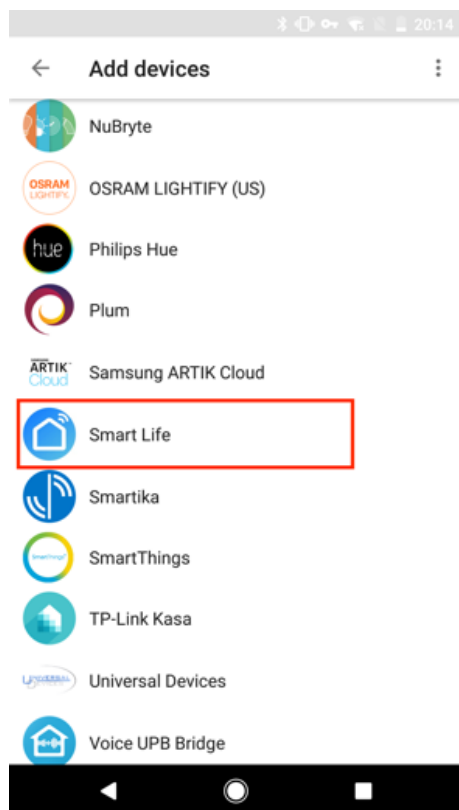

**Step 3:** Type your Smart Life account and password you registered in Part 2, then tap "Link Now".

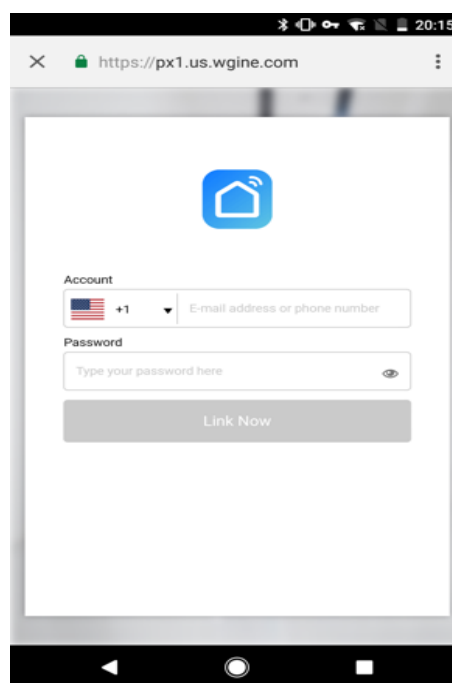

**Step 4:** After you assign rooms for devices, your devices will be listed in the Home Control page.

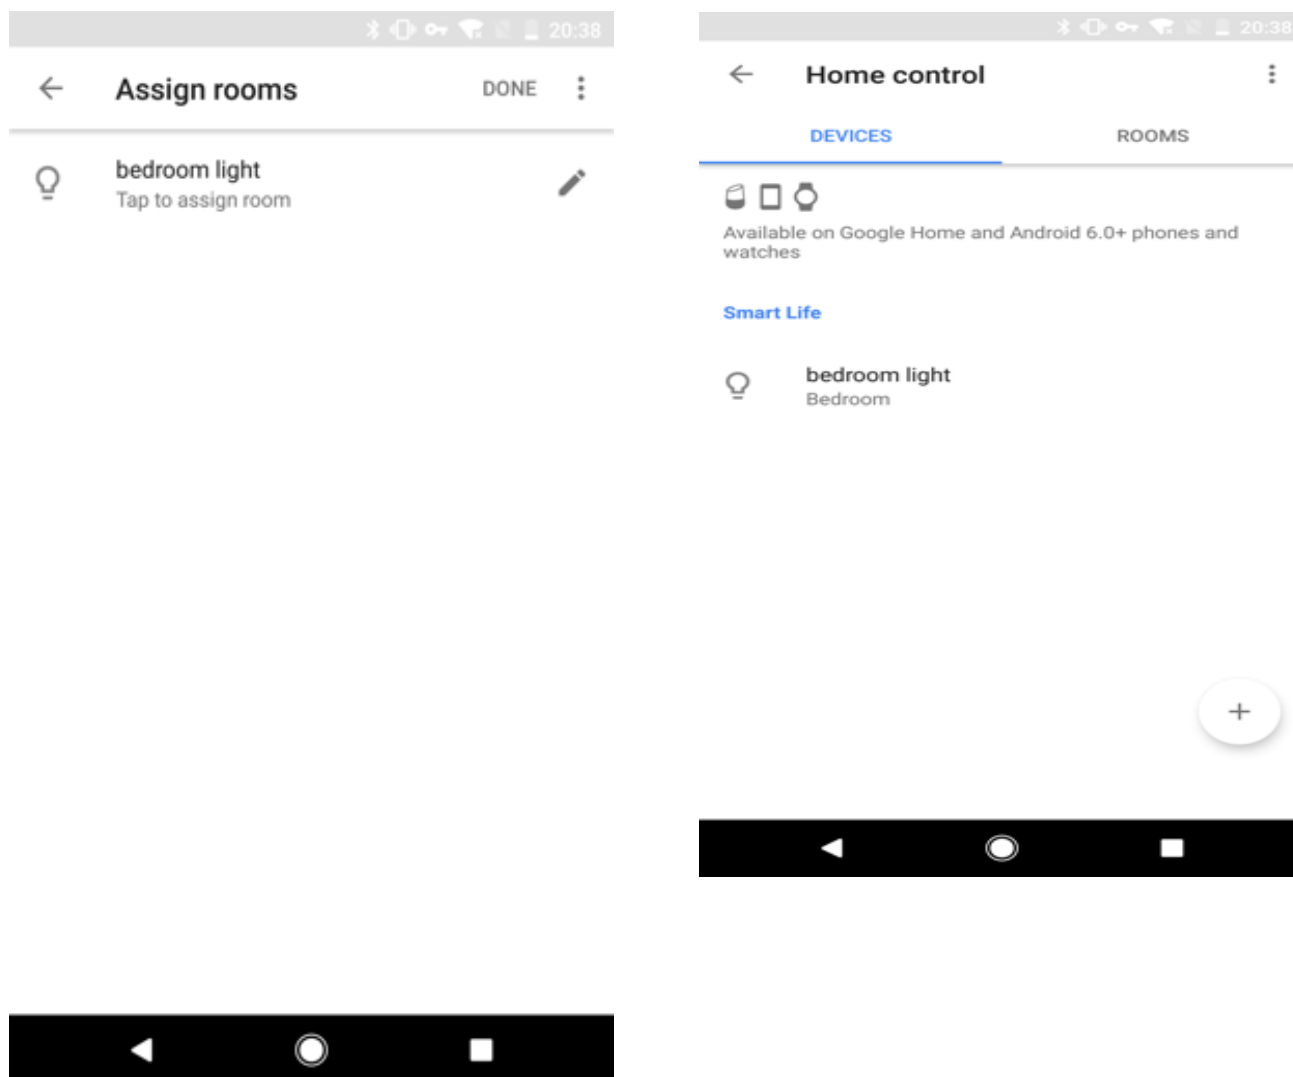

**Step 5:** Control your devices through Google Home

Now you can control your smart devices through Google Home. Take bedroom light as the example, the supported voice commands are as below:

*Ok Google, turn on/off bedroom light.*

**Warning:**

Plug in fully to the wall outlet while using

Do not insert a conductor or other tools to the socket hole

If there is radio frequency interference, it might affect the operation

Indoor use only

Do not use in bathroom and other damp locations

Please ensure the security of the electricity, resistive load current cannot be higher than 10A

Please keep the device out of the reach of children to avoid danger.



**FCC ID: 2ANJ7-S01**

**Dongguan MaiJia Intelligent Technology Co., Ltd.**

Model name: Smart Switch (single)

Model No.: S01

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The distance between user and products should be no less than 20cm