

Manufacturer: Fujian Putian xinhongyi Electronic Technology Co., Ltd.

Address: High tech Development Zone,Hanjiang District, Putian City, Fujian Province (No. 1289, shiting East Road)

1: Antenna model: Inverted F antenna (IFA)

2: Antenna type: PCB antenna

3: Gain: 1.5dBi

4: The antenna size is shown in Figure 1

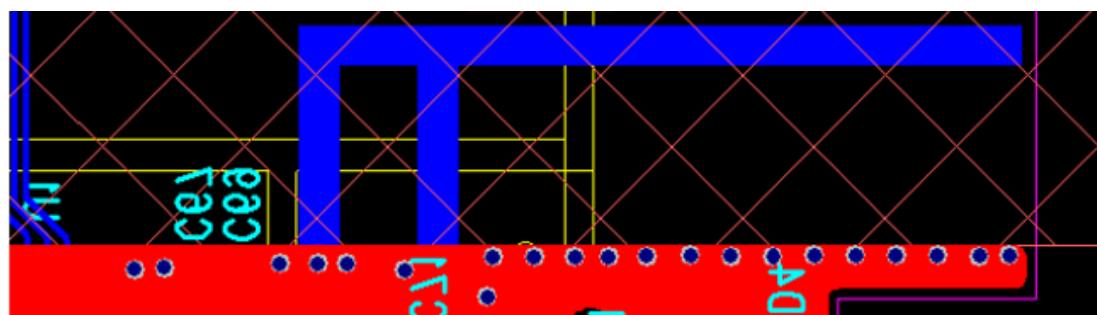


Figure 1 18.2*5.5mm

5: Antenna efficiency

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	36.8	-4.3	0.8
2410	40.3	-3.9	1.3
2420	40.4	-3.8	1.4
2430	41.6	-3.8	1.5
2440	40.5	-3.7	1.4
2450	40.7	-3.7	1.4
2460	41.2	-3.8	1.5
2470	40.0	-4	1.4
2480	38.0	-4.2	1.1
2490	35.9	-4.5	0.9
2500	34	-4.7	0.7

6. The antenna performance is shown in Figure 2.The working frequency band covers the entire 2.4G ISM frequency band.

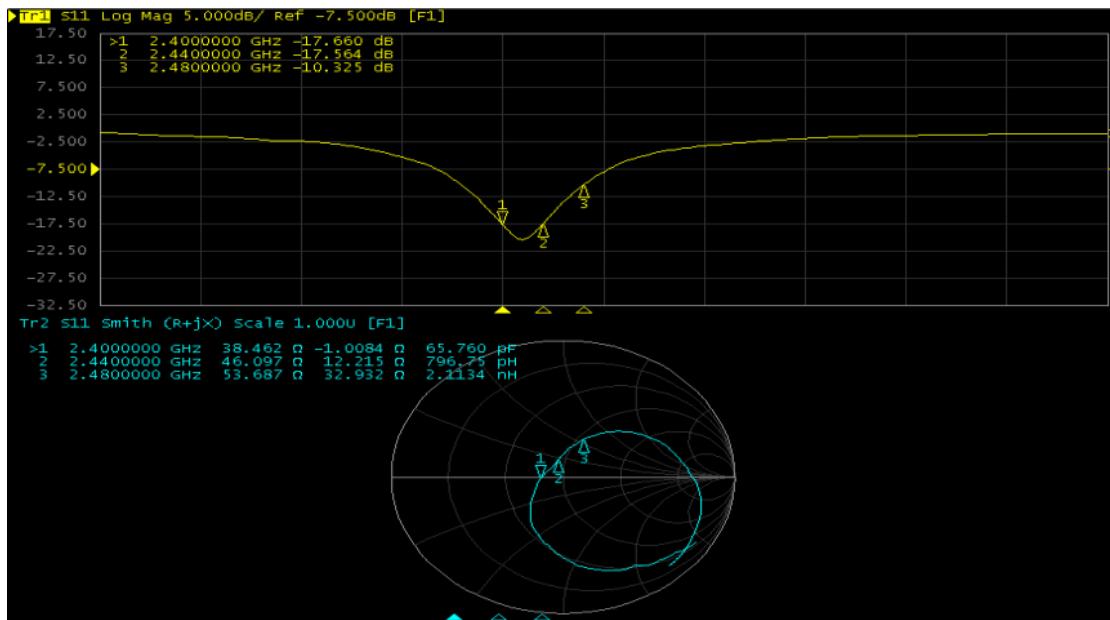


Figure 2

7: 2D and 3D antenna gains are shown in Figures 3 and 4, reaching around 1.5dBi:

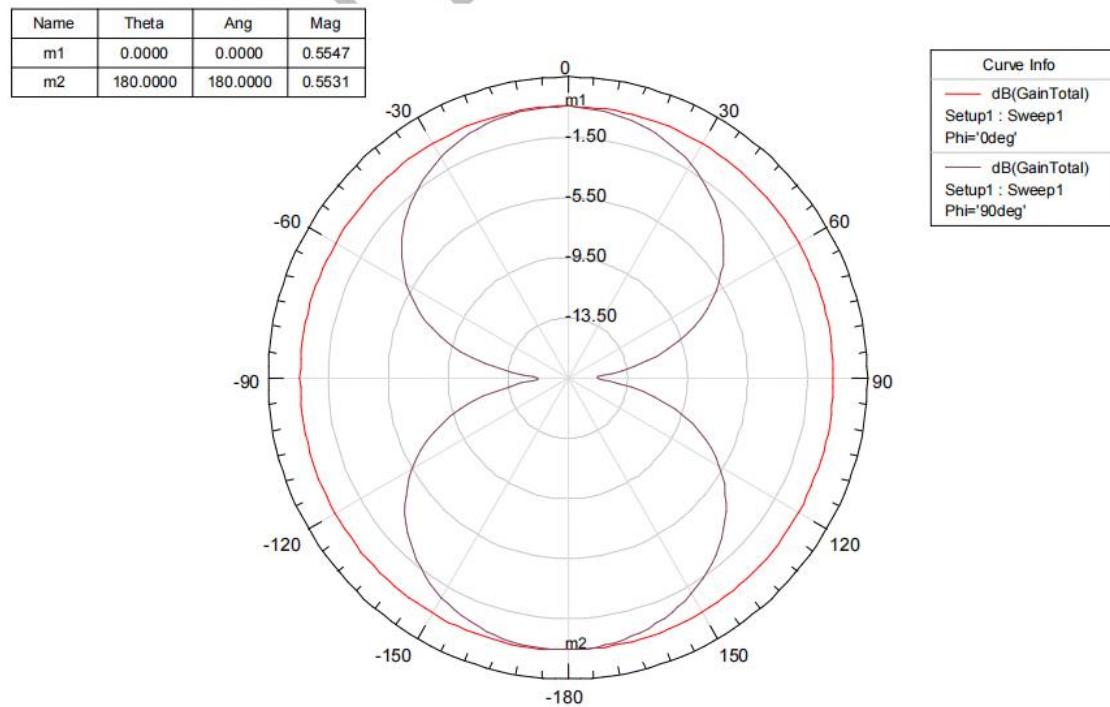


Figure 3 2D antenna efficiency

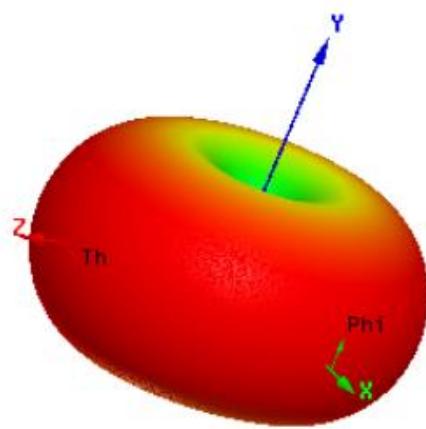
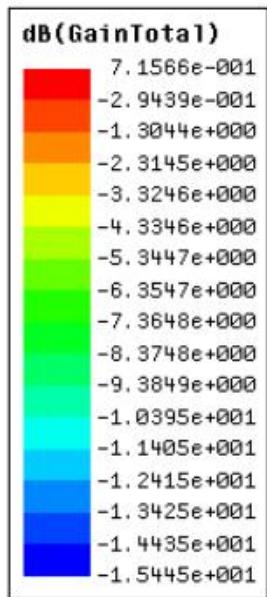


Figure 4 3D Antenna effiiciency