



Thank you for trusting MUVEACOUSTICS with delivering you excellence in sound. We encourage you to connect with us and become a part of our community!

**SCAN THE QR CODE YOU WILL FIND INSIDE. SHARE WITH US YOUR PRODUCT EXPERIENCE.**

## JOIN THE COMMUNITY

SIGN UP to receive

- Special Offers!
- Access to Events!
- Contests!
- News on new products launched

[www.muveacoustics.com/community](http://www.muveacoustics.com/community)



## USER MANUAL AND WARRANTY



A+ Plus Speaker

MA-2000

## WARRANTY CARD

### Bluetooth Connection

Devices with Bluetooth 4.2 wireless technology or above, such as Bluetooth wireless technology equipped computers, smartphones and MP3 players.

To use Bluetooth for your audio connection first pair A+ with your audio source (music player, smartphone, laptop, or other Bluetooth equipped device that can act as audio source). First press and hold the Power / Multifunction Button (MFB) for three seconds or until you hear the tone to turn the power on. Once the power turns on the A+ is in pairing mode. The blue Sync LED will blink slowly and then flash quickly. Make sure Bluetooth is enabled on your audio source and in a few moments "MUVEACOUSTICS:A+" will appear on your list of possible Bluetooth connections. Press "pair" or "connect" on your device and when the connection is made, the blue led will stop to blink and you can hear 1 sec. flat tone. You are paired.

From now on, when you turn on A+, it will automatically search for the last Bluetooth device it was paired with.

The period of Bluetooth pairing is about 10 minutes after switched on. If there is no pairing after 10 minutes, A+ will shut off automatically. However, the Aux-in function can override the playing of music by Bluetooth connection even the speaker is connected to Bluetooth devices.

To disconnect and pair with another device, double click quickly the Power / Multifunction Button (MFB) to come back to the pairing mode and repeat the procedure with another device.

### Wired Connection

A+ has a standard 3.5mm audio cable. If there is no Bluetooth source available or if you simply prefer a wired connection, you can connect your A+ directly to your audio source using a stereo male 3.5mm connector at the end of the cable.

(This cable is included in the packaging box)

FCC ID: 2ANVW-MA-2000

1833010



### FCC Statement

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

### MUVEACOUSTICS ONE-YEAR LIMITED WARRANTY

MUVEACOUSTICS A+ speaker have been subjected to a thorough series of tests to ensure the highest level of dependability. It is unlikely that you will experience any problem, but if a defect should become apparent during the use of this product, MUVEACOUSTICS warrants to the original purchaser that this product will be free from defects in material and workmanship for a period of 12 months from the date of your original purchase from an authorized dealer. If a defect covered by this warranty occurs, MUVEACOUSTICS, at its option, will repair or replace the product purchase at no repair charge (postage charges will apply). If a replacement is necessary and your product is no longer available, a comparable product may be substituted at the sole discretion of MUVEACOUSTICS.

This warranty does not cover normal wear and tear, abusive use or misuse, modification, tampering or by any other cause not related to either materials or workmanship. This warranty does not apply to product used for any industrial, professional or commercial purposes.

### CUSTOMER SERVICE



For any service or technical queries, please contact our service team on the below email.



Email: [consumersupport@zeeva.com](mailto:consumersupport@zeeva.com)

Keep all relevant information for future reference

Imported and distributed by  
Zeeva Electronics Private Limited.  
All rights reserved.

901-902, Trade World C wing  
Kamla Mill Compound,  
Senapati Bapat Marg,  
Lower Parel West,  
Mumbai-400013

MuveAcoustics

muveacoustics\_

MuveAcoustics

### Caution

Changes or modifications not expressly approved by the party responsible for the compliance could void the user's (or your) authority to operate the equipment. Avoid storage in extreme heat or cold. Avoid extreme temperatures and high humidity. The product's working temperature range is -35°C to 60°C (-31°F to 140°F).






The input voltage to the product is 5V 0.5A.

In order to charge the product in safe manner and reliable conditions, please only adopt certified appropriate charger / adapter for charging the product. Only charge the product at ambient temperatures between 10 deg °C / 50 deg °F and 40 deg °C / 104 deg °F. Do not heat above 70 deg °C / 158 deg °F, eg. Do not expose to sunlight or throw into fire.

Switch off the product after use.

Please note that we won't take any responsibility for any wrong operation (eg. Voltage higher than 5V) as this may result in severe injury or loss of property, and we cannot control the operating process during the time the user using this product. In extreme cases, abuse or misuse of Lithium battery pack can lead to explosion, heat generation, fire development or smoke development.

## USER MANUAL

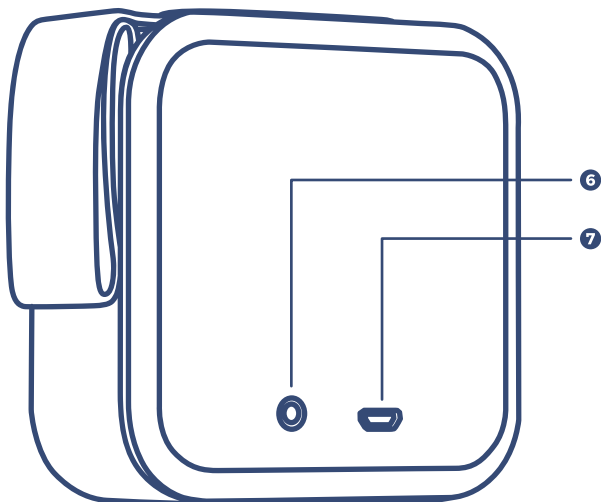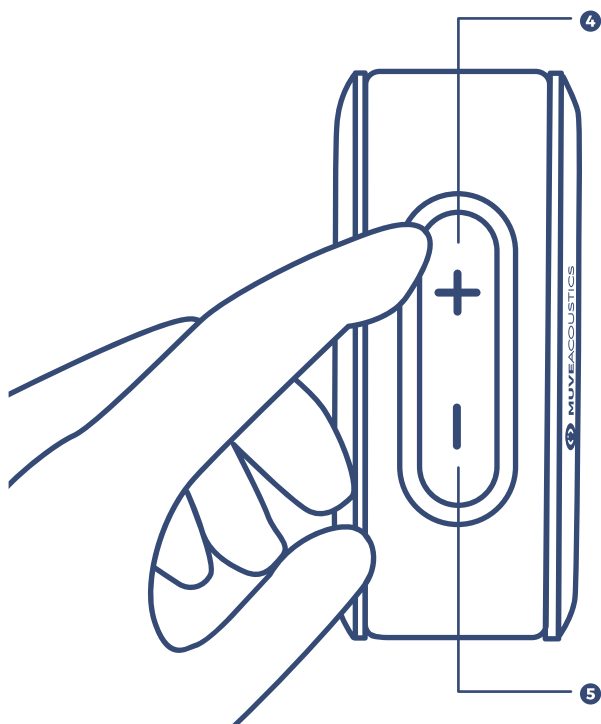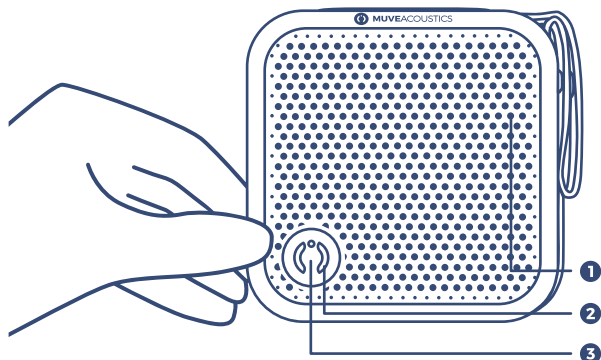

### 1 Microphone

A+ has a built-in Microphone for phone calls

### 2 Power / Multifunction Button (MFB)

Press and hold for about 3 seconds to turn the power On / Off.

#### Play / Pause

You can play and pause your music using the

Power / Multifunction Button (MFB).

To perform this function press and release the button quickly.

#### Speakerphone

When incoming call ring on your phone you will hear a tone ringing on your A+ speaker. Press and release the Power / Multifunction Button (MFB) to answer / end a call while A+ is paired with your phone via Bluetooth. Use A+ integrated microphone to speak.

Press and hold the Power / Multifunction Button (MFB) for 2 seconds to refuse an incoming call.

### 3 Bluetooth Sync Indicator

Blinks blue when ready to pair.

Bluetooth LED will be solid blue when the device is paired.

### 4 Volume Up

Press and release the "+" button quickly to increase volume.

#### Next Song

Press and hold "+" button to skip to next song

### 5 Volume Down

Press and release the "-" button quickly to decrease volume.

#### Previous Song

Press and hold "-" button to skip to Previous song

### 6 3.5mm Audio Line In

Standard audio in for use without Bluetooth.

(Cable Included)

### 7 USB Port

Micro USB port for charging A+.

(Cable Included)

### Battery Level

When the battery voltage is low, sound beep will be heard every 3 minutes.

After 6 minutes, device will shut off automatically.

White LED lights up during charging and it will turn off once fully charged.

### Please Note:

A+ comes with a lithium-ion polymer battery.

For best results, fully charge A+ before use. It will take 2-2.5 hours to fully charged.

To charge, plug the micro USB cable into A+ and plug the standard USB connector into your power source.

While A+ is power off and charging the power LED will be solid white.

### Please Note:

A+ offers audio feedback when you use the controls.

When you hear the tone A+ is performing the function you've initiated. Functions that include audio feedback include:

- Power On / Power Off
- Bluetooth pairing available
- Bluetooth pairing completed
- Incoming phone call

When a 3.5mm audio cable is plugged in, the audio signal will go through the audio port and the Bluetooth will be automatically disconnected. Bluetooth connection will be restored once the audio cable has been pulled out.