



Antenna Test Report

天线调试报告

Customer Name(客户名称) : 万利达

Project Name (项目名称) : D2325

Date (日期) : 2023. 08. 07

R & D Engineer (研发) : 莫振文

Directory(目录)

1.Company Introduction(公司简介)	3p
2.Project Overview(项目概况)	4p
3.Antenna Impedance Matching(天线阻抗匹配)	5p
4.Antenna Passive(天线无源相关数据)	6-11p
5.Antenna Radiation Pattern(天线辐射方向图)	12-18p
6.Summary总结	19p



公司简介



爱特恩科技（深圳）有限公司成立于2016年，公司位于深圳市，是一家专业的通讯电子产品配件的解决方案提供商和制造商。集天线研发、生产、销售于一体的高新科技企业。

公司主要从事与开发安防类、智能家居类的电子产品。目前拥有3座微波暗室、模拟人头手测试、网络分析仪等。


我们致力与客户建立长期稳定的商业合作关系，始终坚持“顾客至上，锐意进取”的经营理念，为我们的客户提供最具竞争力的价格，最好的质量和优质的服务。



专注品质 | 质量第一 | 共赢未来

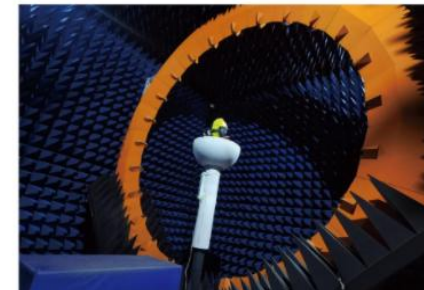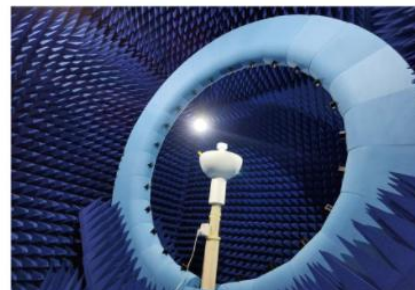

拥有SATIMO原装实验室7M*5M*5M的24探头一座
 盖表3.5MX3.5MX3.5M的24探头一座
 频率范围均为400MHZ-8.5GHZ
 2/3/4/5G、
 WIFI A/B/G/N/AC/AX
 BT
 GPS
 NB-10T等有源测试，
 拥有模拟人头手测试设备

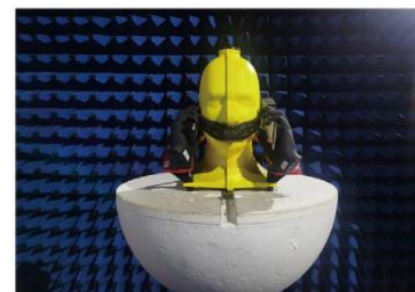

拥有AGILENT5071系列网络分析仪、AGILENT8960、RS CM W500、4438C等终端测试设备,提供天线性能测试。




● D2325_Project Overview(项目概况)

Prototype status (样机状态)	DVT
product type (产品类型)	Projector(投影仪)
Number of antennas (天线数量)	3pcs
Antenna frequency band (天线频段)	WIFI0 802.11 a/b/g/n
	WIFI1 802.11 a/b/g/n
	BT
structural style (结构形式)	FPC+CABLE线
environmental treatment (环境处理)	No changes (未做改动)
matching circuit (匹配电路)	No changes (未做改动)



● D2325_Antenna Impedance Matching(天线阻抗匹配)



1. No changes were made to the matching of the three antennas(三个天线匹配均无更改)。

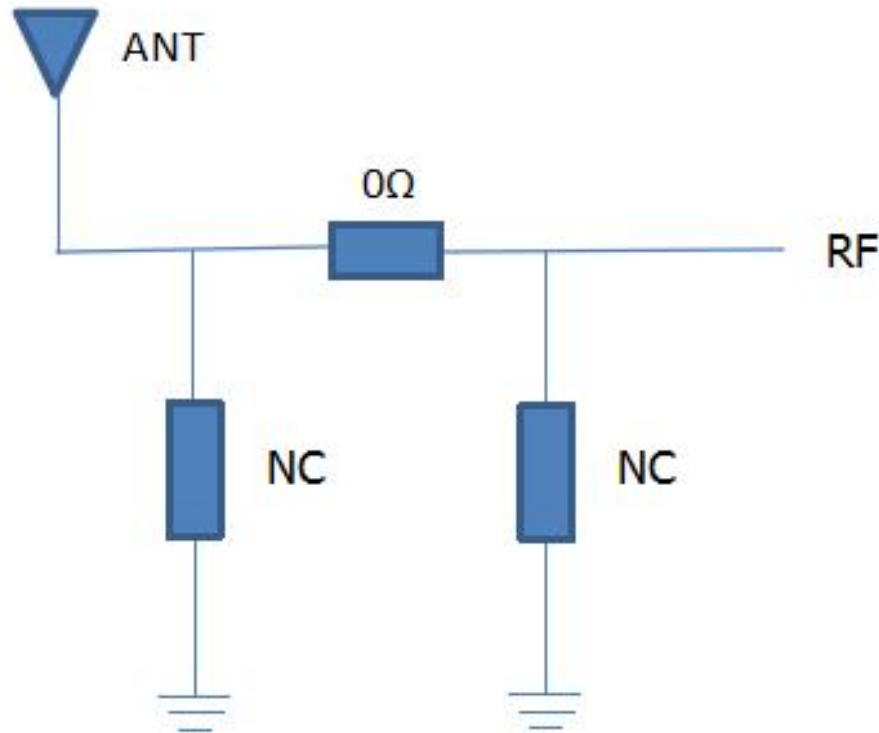

● D2325_WIFI 0_S11/VSWR (无源驻波比)

WIFI 0 antenna_VSWR (WIFI 0天线_VSWR)



Isolation between WIFI 0 antenna and WIFI 1 antenna (WIFI 0天线与WIFI 1天线隔离度)

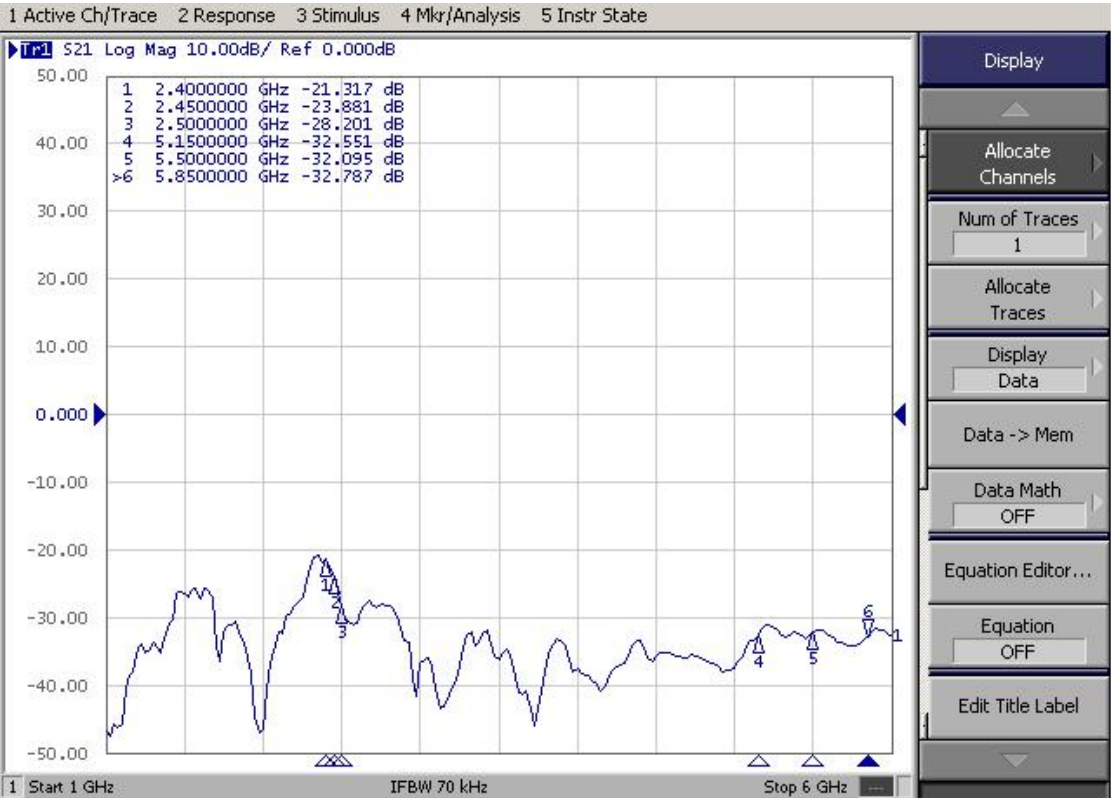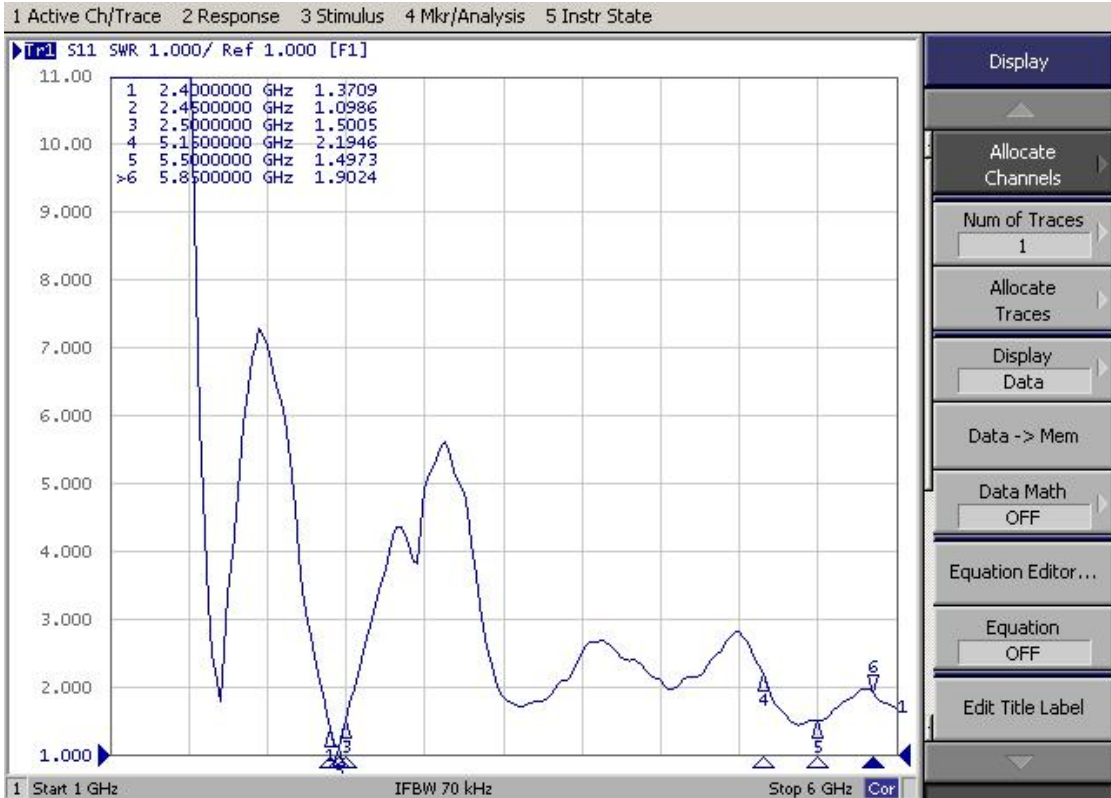

● D2325_WIFI 1_S11/VSWR (无源驻波比)

WIFI 1 antenna_VSWR (WIFI 1天线_VSWR)



Isolation between WIFI 1 antenna and BT antenna (WIFI 1天线与BT天线隔离度)

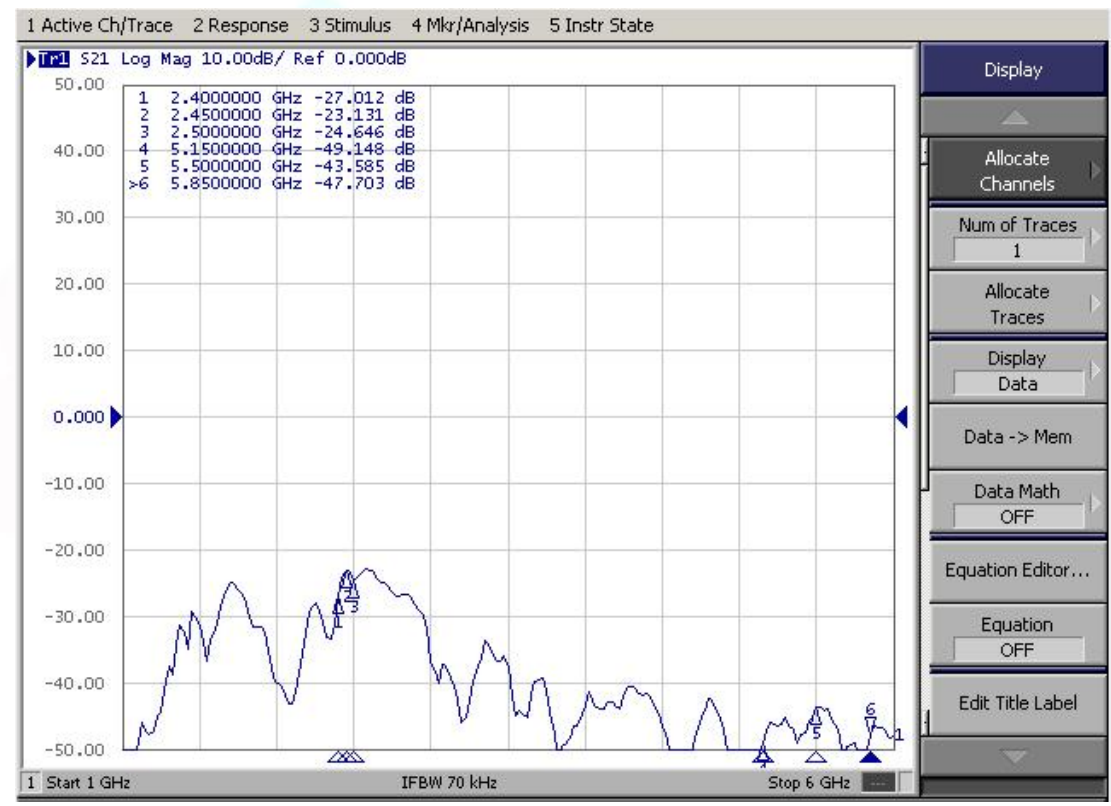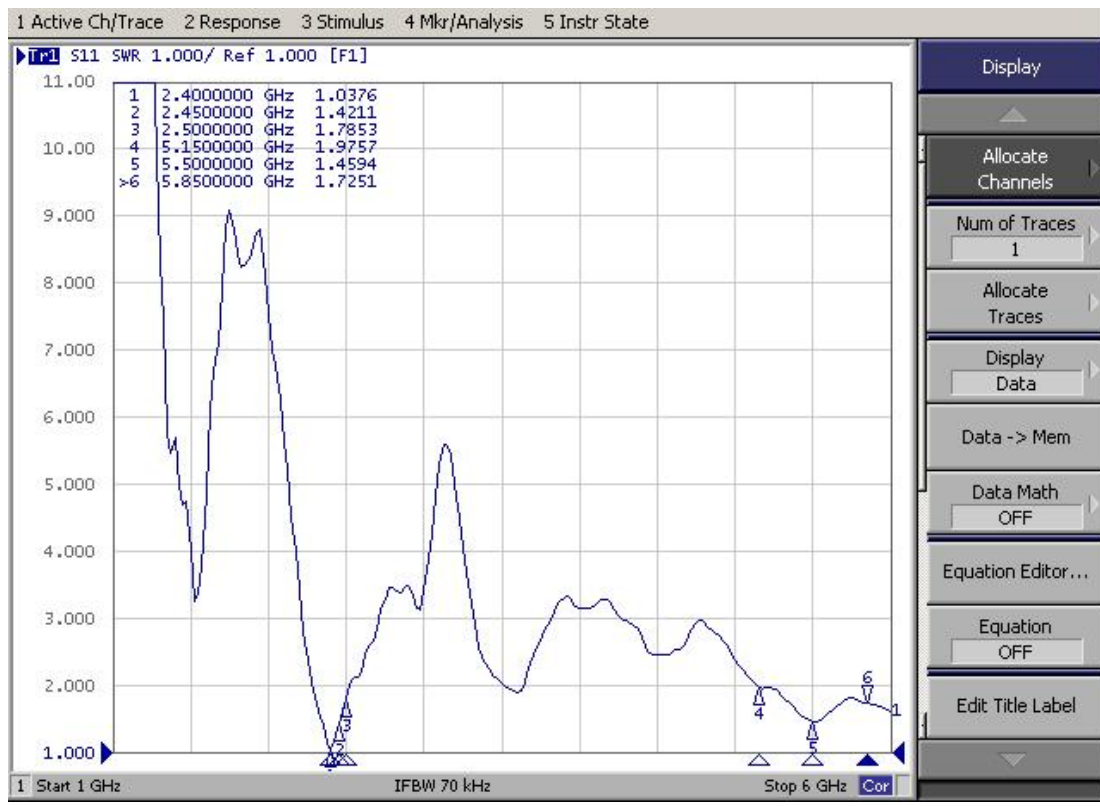

● D2325_BT_S11/VSWR (无源驻波比)

BT antenna_VSWR (BT天线_VSWR)

Isolation between WIFI 0 antenna and BT antenna (WIFI 0天线与BT天线隔离度)

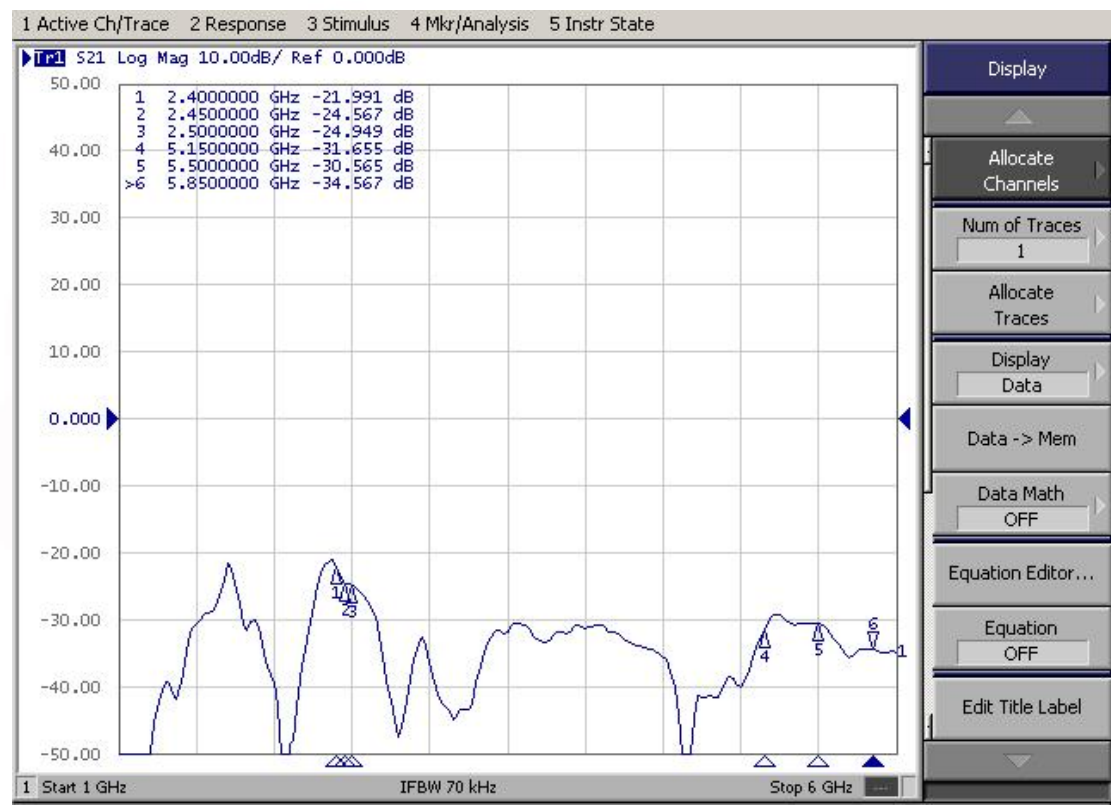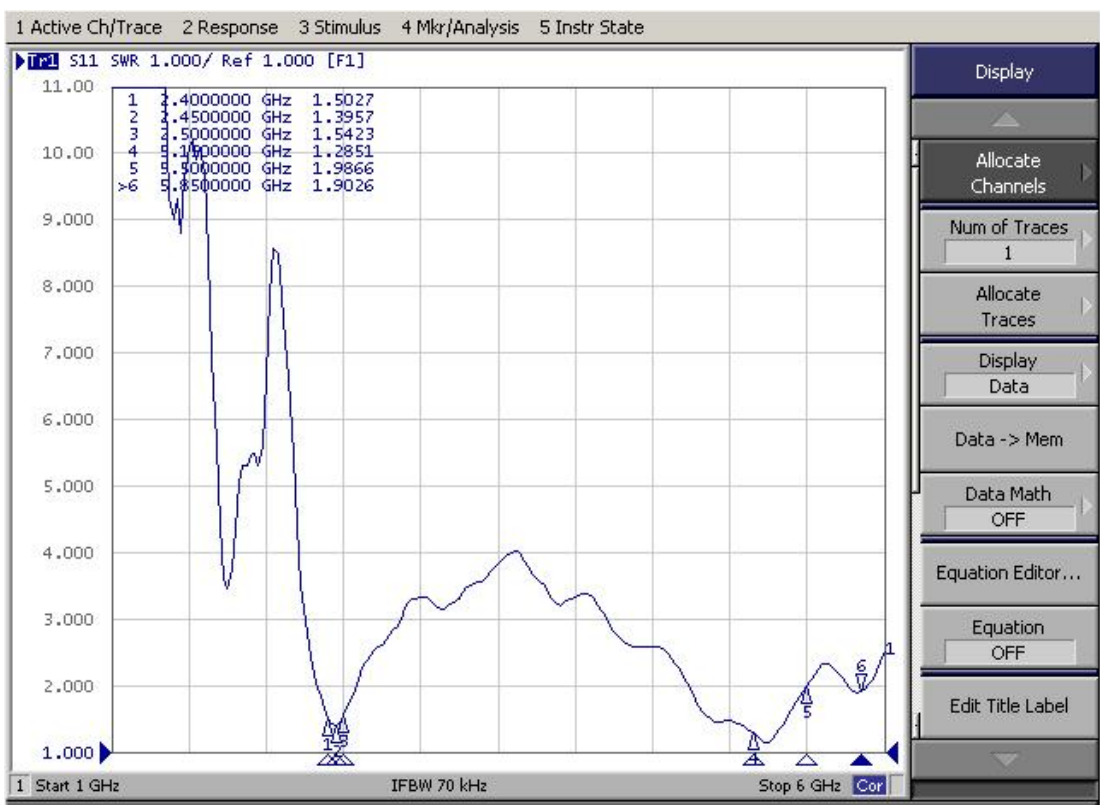

● D2325 _WIFI 0_Efficiency & Gain (无源效率和增益)

2.4G

5G

(2.4G)Passive Test Results(无源测试结果)				(5G)Passive Test Results(无源测试结果)			
Frequency (MHz)	Efficiency (%)	Efficiency (dB)	Max Gain (dBi)	Frequency (MHz)	Efficiency (%)	Efficiency (dB)	Max Gain (dBi)
2400	56.99%	-2.44	4.64	5150	47.65%	-3.22	3.21
2420	58.28%	-2.34	4.89	5200	48.50%	-3.14	3.14
2440	57.01%	-2.44	4.82	5250	49.35%	-3.07	3.30
2460	55.80%	-2.53	5.03	5300	50.07%	-3.00	3.48
2480	53.95%	-2.68	4.67	5350	49.88%	-3.02	3.36
2500	53.90%	-2.68	4.31	5400	49.24%	-3.08	3.86
AVG:	55.99%	-2.52	4.73	5450	48.85%	-3.11	4.25
				5500	48.84%	-3.11	4.35
				5550	49.18%	-3.08	4.73
				5600	49.39%	-3.06	4.99
				5650	49.56%	-3.05	4.90
				5700	48.11%	-3.18	4.55
				5750	47.57%	-3.23	4.21
				5800	48.59%	-3.13	4.32
				5850	50.00%	-3.01	4.53
				5900	50.63%	-2.96	4.78
				AVG:	49.09%	-3.09	4.12



● D2325 _WIFI 1_Efficiency & Gain (无源效率和增益)

2.4G

5G

(2.4G)Passive Test Results(无源测试结果)				(5G)Passive Test Results(无源测试结果)			
Frequency (MHz)	Efficiency (%)	Efficiency (dB)	Max Gain (dBi)	Frequency (MHz)	Efficiency (%)	Efficiency (dB)	Max Gain (dBi)
2400	53.86%	-2.69	4.09	5150	46.26%	-3.35	3.23
2420	54.70%	-2.62	4.29	5200	45.38%	-3.43	3.54
2440	56.99%	-2.44	4.56	5250	45.37%	-3.43	3.54
2460	57.26%	-2.42	4.50	5300	46.45%	-3.33	3.96
2480	56.67%	-2.47	4.87	5350	48.24%	-3.17	3.17
2500	55.53%	-2.55	4.41	5400	51.09%	-2.92	3.59
AVG:	55.84%	-2.53	4.45	5450	53.21%	-2.74	3.97
				5500	52.16%	-2.83	4.02
				5550	51.89%	-2.85	4.15
				5600	51.07%	-2.92	4.18
				5650	50.69%	-2.95	4.42
				5700	48.05%	-3.18	4.65
				5750	47.60%	-3.22	5.12
				5800	48.58%	-3.14	5.36
				5850	49.31%	-3.07	5.03
				5900	48.67%	-3.13	4.16
				AVG:	49.00%	-3.10	4.13

● D2325 _BT_Efficiency & Gain (无源效率和增益)


(2.4G)Passive Test Results(无源测试结果)			
Frequency (MHz)	Efficiency (%)	Efficiency (dB)	Max Gain (dBi)
2400	54.91%	-2.60	2.67
2420	55.01%	-2.60	2.50
2440	56.85%	-2.45	3.19
2460	58.21%	-2.35	3.09
2480	58.01%	-2.37	3.48
2500	59.60%	-2.25	3.55
AVG:	57.10%	-2.44	3.08




D2325_2.4G_2D Antenna Radiation Pattern(2D 天线辐射方向图)

- 1. The horizontal direction is the X-Y plane of the legend
(水平方向为图例X-Y面)。

WIFI 0

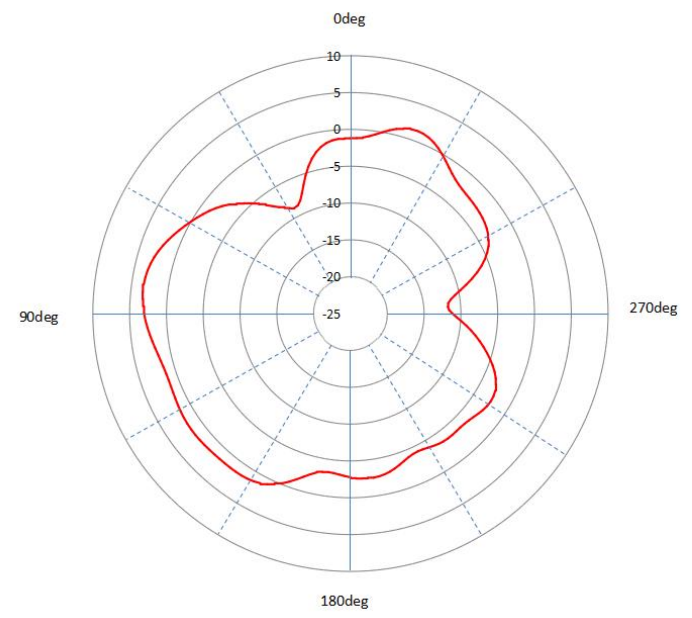


WIFI 1

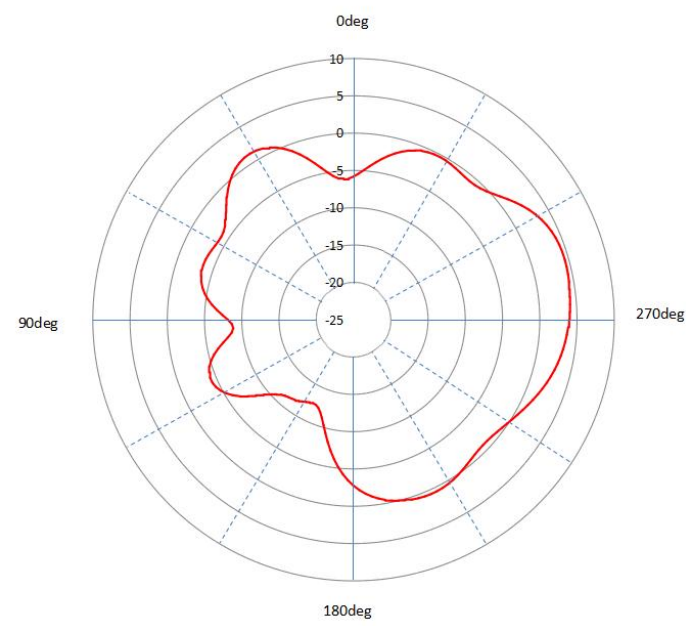

● D2325_2.4G_2D Synthetic Direction Map(2D 合成方向图)


- 1. The horizontal direction is the X-Y plane of the legend(水平方向为图例X-Y面)。
- 2. The minimum value is -3.33(最小值为-3.33)。

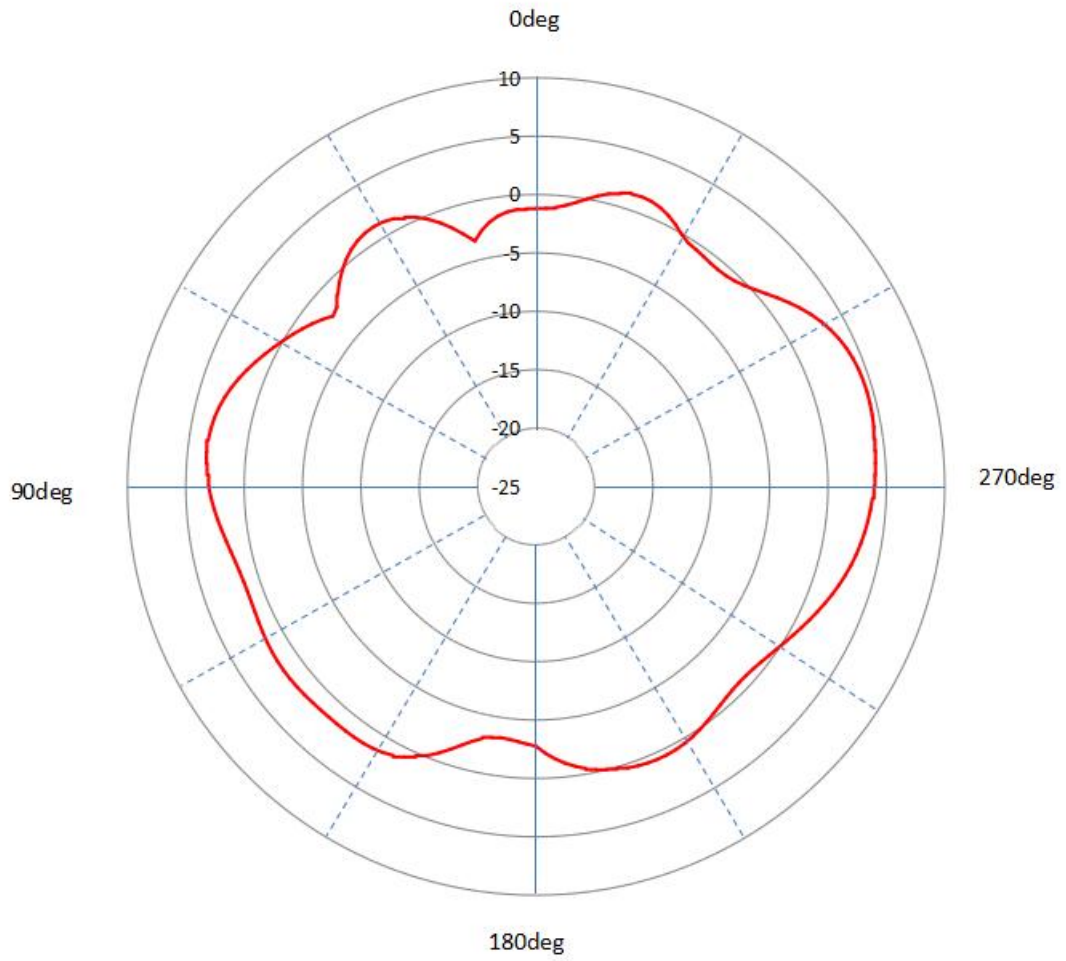


D2325_5G_2D Antenna Radiation Pattern(2D 天线辐射方向图)

- 1. The horizontal direction is the X-Y plane of the legend (水平方向为图例X-Y面)。

WIFI 0

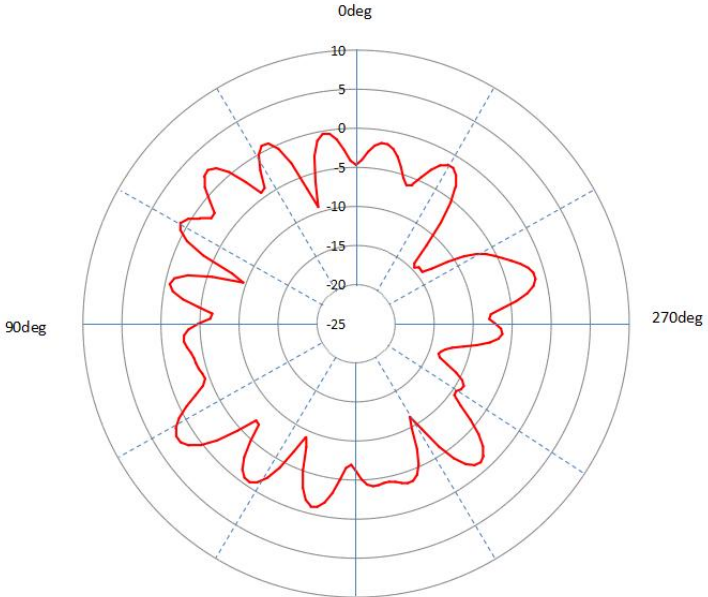


WIFI 1

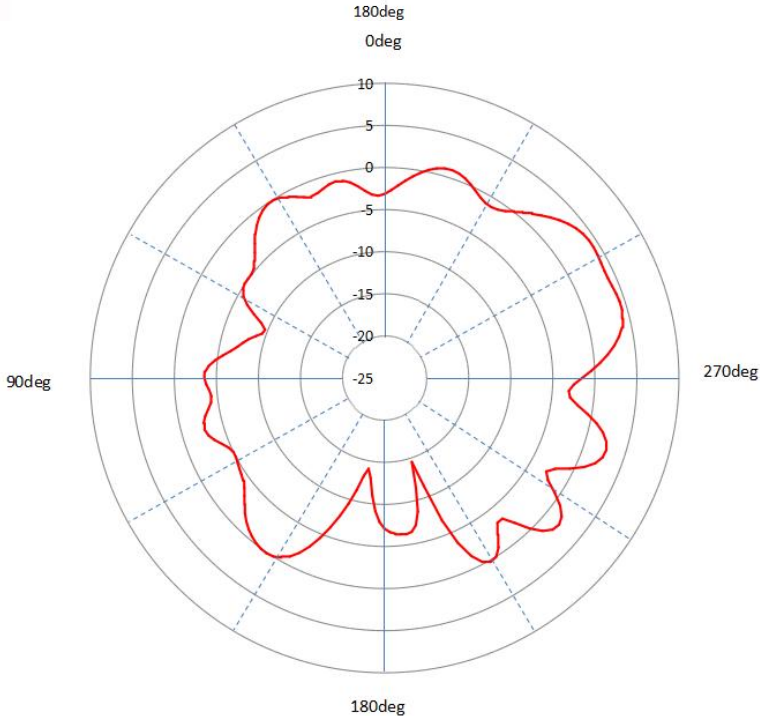


D2325_5G_2D Synthetic Direction Map(2D 合成方向图)

- 1. The horizontal direction is the X-Y plane of the legend(水平方向为图例X-Y面)。
- 2. The minimum value is -9.13(最小值为-9.13)。

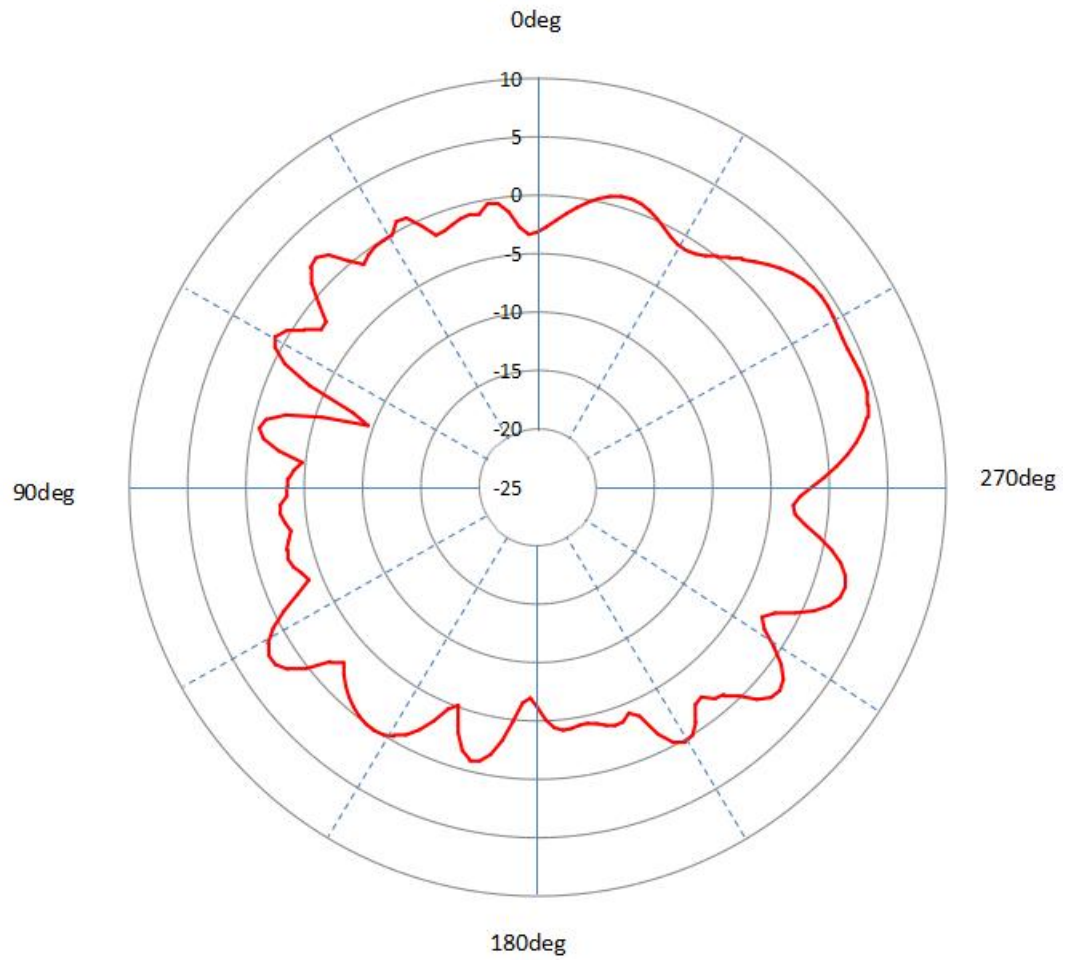


● D2325 _2.4G_ 3D Antenna Radiation Pattern(3D 天线辐射方向图)

WIFI 0 -2460MHz

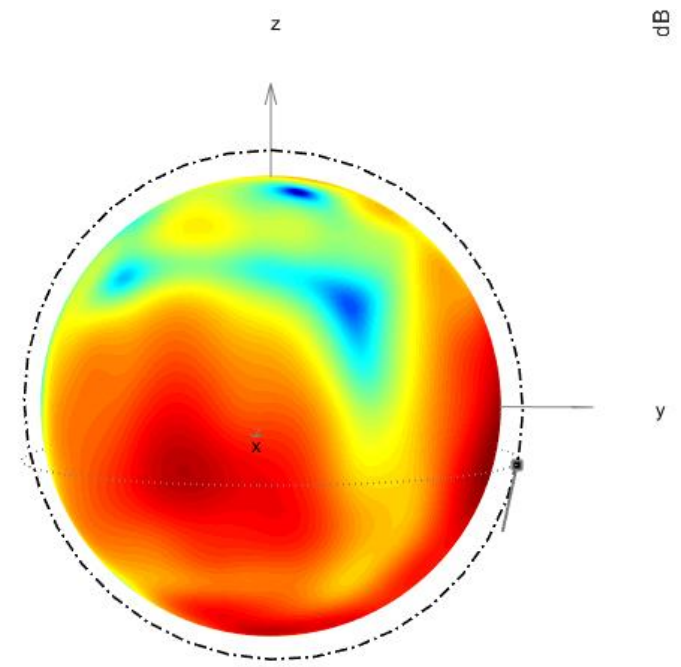


WIFI 1 -2460MHz

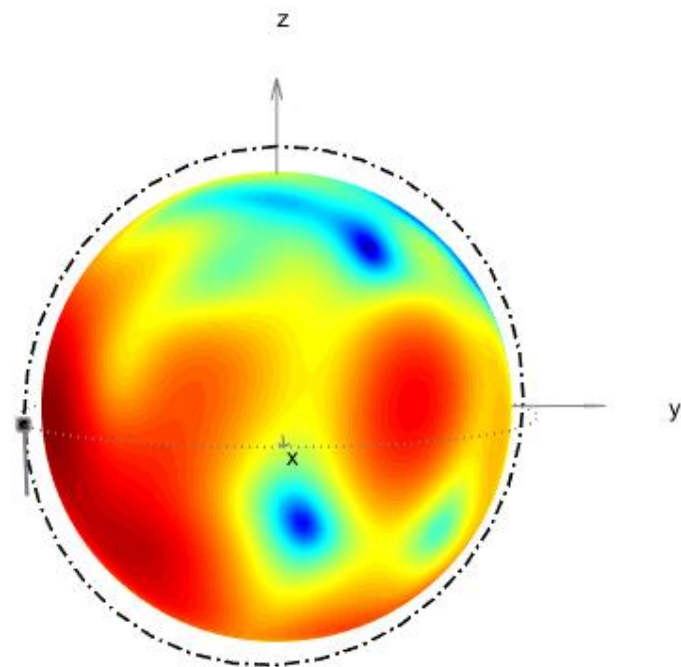


● D2325 _5G_ 3D Antenna Radiation Pattern(3D 天线辐射方向图)

WIFI 0 -5500MHz

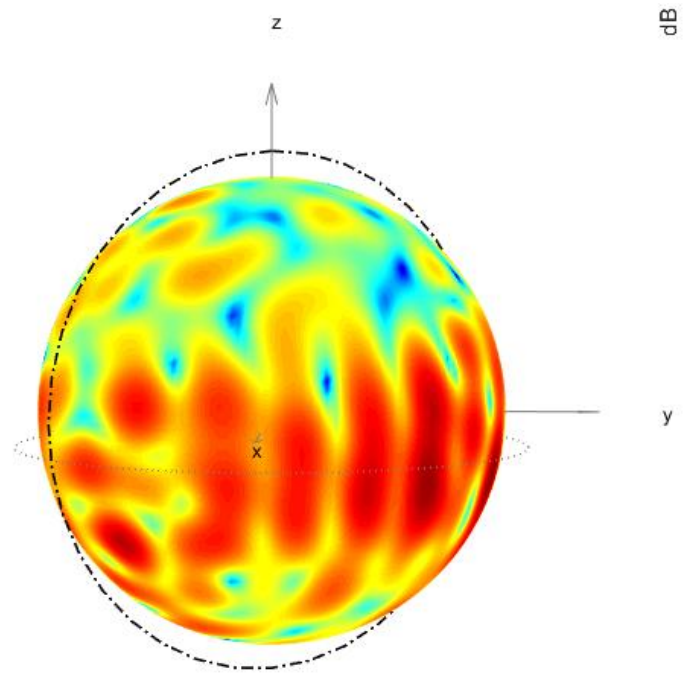



WIFI 1 -5500MHz

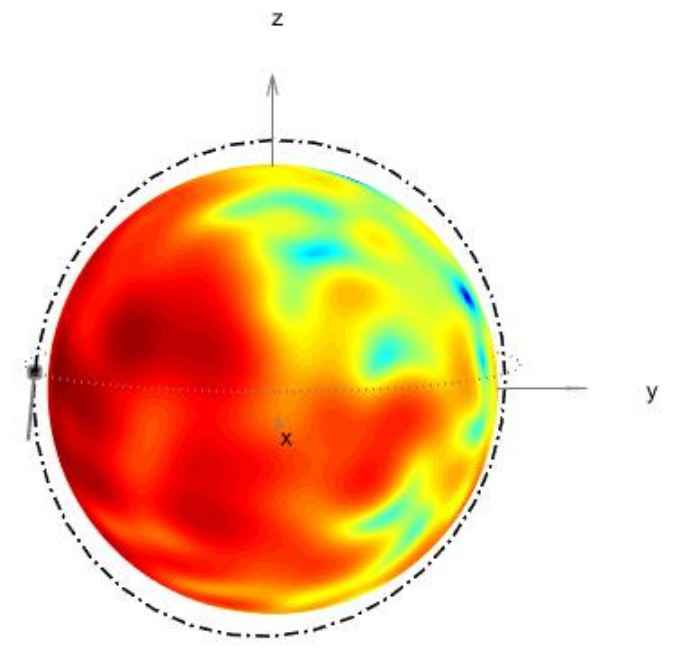

D2325_BT Antenna Radiation Pattern(天线辐射方向图)

- 1. The horizontal direction is the X-Y plane of the legend(水平方向为图例X-Y面)。
- 2. The minimum value is -7.82(最小值为-7.82)。

BT-2460MHz

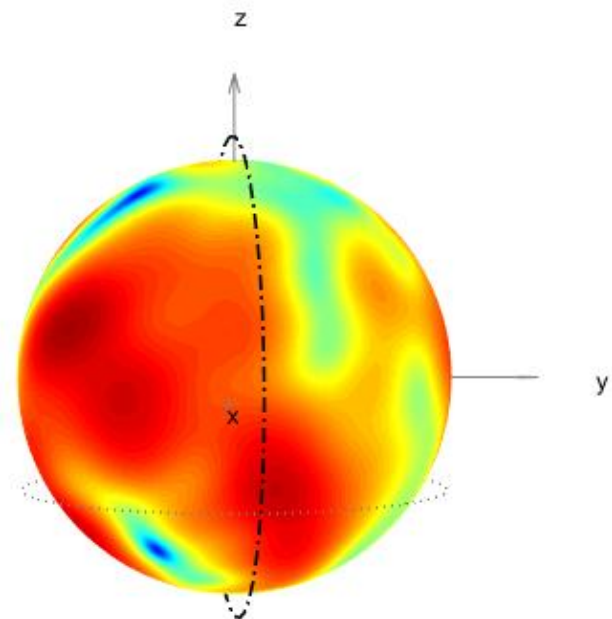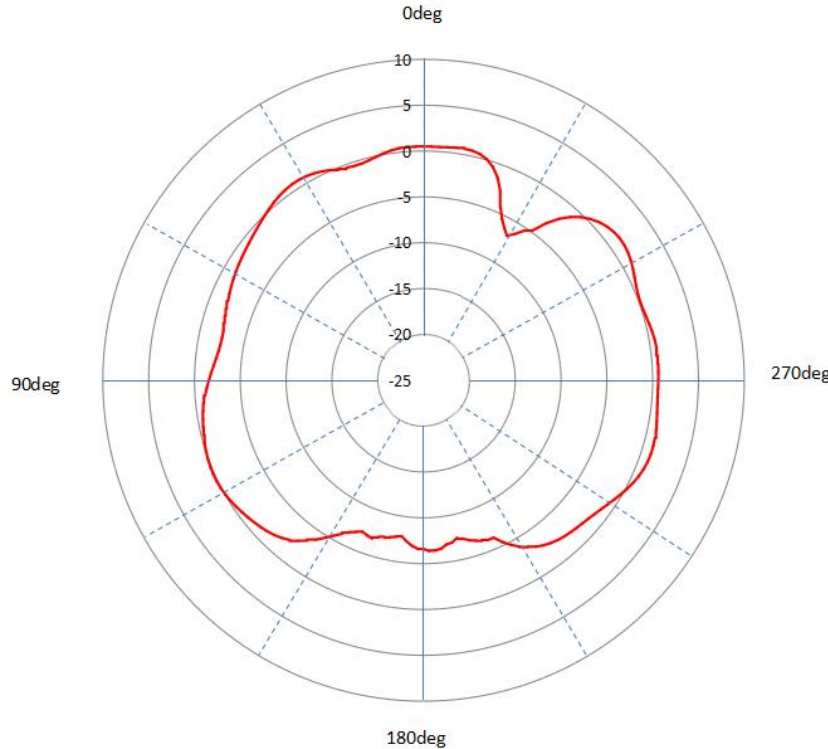

● D2325 _Summary(总结)

- 1.The antenna matching has not changed, and the antenna performance is basically up to standard(天线匹配无更改，天线性能基本达标)。
2. During assembly, pay attention to the position of the FPC sticker and follow the instructions, as well as pay attention to the consistency of the coaxial line placement(组装时注意FPC贴的位置按标示进行作业，以及注意同轴线摆放一致性)。

***** (If there are any changes to the machine, please notify our company; if there are any problems, please communicate promptly) *****

***** (如果机器有变化，请通知我司；如果有任何问题，请及时沟通) *****

Thank You!!