

# Stealth V - Quick Start Guide

#### **POWER ON**

Press and hold the power button at least 3 seconds then release. LEDs will flash in sequence, display current state, and then turn off after a short period.

#### **POWER OFF**

Press and hold the power button at least 5 seconds then release. The LEDs will cycle through a sequence and then turn off.

### **CHARGING**

- Turn the tracking device off by holding down the power button for 5 seconds.
- Open the charging port cover & attach the supplied charger.
- The red light will blink while charging & turn solid red once charged.
- Once fully charged, remove the charger, then screw the charging port cover back on. DO NOT overtighten.

#### **CHARGING NOTES**

- Always fully charge your device before deploying.
- Charging time can take up to 12 hours if fully drained.
- Once fully charged, power off, unplug and store until needed.
- Always charge on a fireproof surface under supervision.
- Use only the supplied charger.
- When not in use, battery should be recharged when it drains to 50% capacity.

## **CHECK ON/OFF STATUS**

To determine if the device is ON, tap (do not hold) the power Button to view the LED's.

## **BATTERY LEVEL**


To check the battery level of your device, visit the coverttrack.com website.

## **PLACEMENT**

Typical placement is under the vehicle within 10" of one side of the vehicle.

## **COVERAGE AREA**

The tracking device must be within 4G coverage of selected model (AT&T or Verizon) to function.

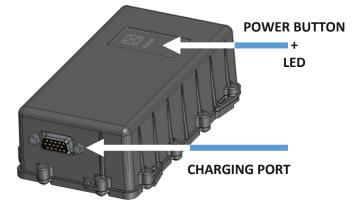

LED BEHAVIOR			
Event	Device is Powered On	Device is Powered Off	
SATELLITE LED			
Acquiring Satellite Fix	Flashing Blue	N/A	
Satellite Fix Acquired	Solid Blue	N/A	
CELL LED			
Cell Search for Network	Flashing Yellow	N/A	
Cell Network Registered	Solid Yellow	N/A	
POWER LED (Charge Cable Connected)			
Device Charging	Flashing Red then OFF	Flashing Continous*	
Device Fully Charged	Solid Red then OFF	Solid Red Continous*	

<sup>\*</sup>If the device is powered off and the charge cable is disconnected, the Power LED will turn off.

#### WARNINGS

- Contains strong magnets that may damage any LCD, Mobile Device Screen, or Computer screen in close proximity.
- Always charge on a fireproof surface under supervision.
- Only use the supplied charger.
- Failure to secure the charging port cover may cause damage to the unit!
- Do not leave connected to the charger for longer than 24 hours.
- When deploying the tracker, do not place the device near or on fuel tank or fuel tank lines.
- Do NOT place near any source of heat (ex: exhaust system or engine compartment) as this may cause fire.
- Failure to follow the instructions may result in fire, personal injury and damage to property.

Please test device and check tracking on <a href="CovertTrack.com">CovertTrack.com</a> before deploying.

# Tracking: www.coverttrack.com Customer Support 480.657.9545

# **Part 95 Transmitter Technical Specifications**

Power Output	0.1mW Maximum
Operating Frequency	216.025 – 216.975 MHz
Operating Channels/Modes	20 channels, 50 kHz spacing
Data Rates	N/A
Tuning Range	216.025 – 216.975 MHz
Intended Use	Tracking by Law Enforcement
Antenna Connector/Gain Information	Internal Antenna, 0 dBi maximum gain

## Note:

This equipment should be installed and operated with a minimum distance of 20 cm between the radiator and the body of the user or nearby persons.

## **FCC Regulations:**

105(b) This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an output on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

(15.21) Pursuant to FCC 15.21 of the FCC rules, changes not expressly approved by CTRACK might cause harmful interference and void the FCC authorization to operate this product.

(15.19(a)(3)) This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

#### **RF Note:**

This product complies with FCC OET Bulletin 65 radiation exposure limits set forth for an uncontrolled environment.

A shielded USB cable must be used with this device.

#### LPRS Note:

This device may not interfere with TV reception or Federal Government radar.

This transmitter is authorized by rule under the Low Power Radio Service (47 CFR part 95) and must not cause harmful interference to TV reception or to the United States Air Force Space Surveillance System operating in the 216.88-217.08 MHz band. With the exception of automated maritime telecommunications system (AMTS) devices, you do not need an FCC license to operate this transmitter. This transmitter may only be used to provide: auditory assistance to persons with disabilities, persons who require language translation, or persons in educational settings; health care services to the ill; law enforcement tracking services under agreement with a law enforcement agency; or AMTS network control communications. Two-way voice communications and all other types of uses not mentioned above are expressly prohibited.