




B15

蓝牙音响使用说明书

感谢您购买 CAT
B15蓝牙音响, 希望您使用愉快!

一 外型及功能按键

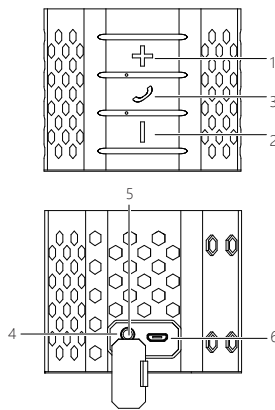

- 1、音量加/下一曲
- 2、音量减/上一曲
- 3、电话键 (长按开、关机/短按接听/挂断/暂停/播放)
- 4、3.5mmAUX 音频输入接口
- 5、复位键 (位于AUX内部)
- 6、USB充电口

二 产品参数

产品型号: B15
 蓝牙版本: Bluetooth V2.1+EDR/4.2兼容
 蓝牙范围: 8-10米
 蓝牙协议: HPF V1.5, HSP V1.2, A2DP V1.2, AVRCP
 额定功率: 3W
 频率响应: 100Hz-16KHz
 信噪比: 82 dB
 失真: <10% THD (1KHz-6 dB Input)
 电池容量: 内置 4.2V 600mAh锂电池
 充电输入: Micro USB 5V 2A
 充电时间: 约 2 小时
 使用时间: 产品音量调节在80%时的使用时间约6小时, 播放时间视音乐类型播放的波动频率而变化;
 产品尺寸: 78*78*63mm
 工作温度: 0~45°C
 储存温度: -10~60°C

三 LED状态指示灯

充电模式: 充电红灯亮, 充满电红灯灭
 配对模式: 红、蓝指示灯交替闪烁, 配对成功蓝灯长亮
 播放: 蓝灯慢闪
 暂停: 蓝灯长亮
 通话状态: 通话过程中蓝灯慢闪

四 系统组成

- | | |
|------------|----|
| 1、音箱 | 1台 |
| 2、USB充电线 | 1条 |
| 3、3.5mm音频线 | 1条 |
| 4、说明书 | 1份 |

五 无线蓝牙连接

B15音响可以无线连接到大部份蓝牙设备
 1、B15开启时,设备默认为蓝牙状态。
 2、处于配对状态指示灯将呈红、蓝交替闪烁。
 3、开启您手机中的蓝牙,并搜索找到“CAT-BT-MINI-SPK”,点击进行配对连接,配对成功后指示灯呈蓝色长亮。

温馨提示: 如果连接失败请关机重启或有可能电池电量不足, 请充电。

六 常用功能说明

- 1、开关机:
长按电话键 (3) 打开音响, 音响会有提示音提示, 同时红、蓝指示灯交替闪烁。再次长按电话键 (3) 关闭音响。
- 2、电池电量低:
产品在蓝牙模式使用过程中连续间隔 10 秒钟听到有“嘀”的一声提示音提示即为电池低电量报警, 报警 5 次后自动关机。
开机后没有连接到蓝牙或断开蓝牙连接15分钟后会自动关机。
- 3、AUX模式:
使用 AUX 模式播放前, 先将音频线两端插头连接到手机或其它带音频输出的产品, 操作手机播放音乐, 播放音乐时短按电话键 (3) 为静音, 连续短按 2 次电话键 (3) 切换到蓝牙模式;
注: AUX模式长按加/减键不支持上下曲。

七 注意事项

- 请在常温环境中存放以及使用本产品;
- 请勿将本产品暴露在雨中或潮湿环境中;
- 请勿丢弃, 避免因跌落造成产品损坏;
- 请勿自行拆解, 修理和改造本产品;
- 产品内置锂电池, 请勿随意丢弃或置于火中, 以免引起危险!

八 温馨提示

- 1、为有利于延长音响使用寿命和你的身心健康, 请不要在长时间大音量的环境下听音, 以免损害你的听力。
- 2、出现故障时, 请用细长的棍状物短按复位键, 再开机; 如问题未解决请联系我司售后部门进行维修。
- 3、电量不足会影响蓝牙距离或蓝牙容易断开, 请及时充电。

九 常见问题解答

问题点	解答
没有任何声音	1、请增大音量。 2、确保B15蓝牙音响与正在播放的设备已配对连接。
不能接听和挂断来电	这些功能取决于您的手机是否支持免提协议的功能, 因此有一些设备不支持它, 详情请查阅您的设备手册。
不能无线连接到B15	请确保您的手机上打开了蓝牙功能, 设备处于配对状态。请参照“常用功能说明”使用。
如在使用过程中有死机情况	请用细长的棍状物短按复位键(AUX音频口里面), 然后再正常开机。
音乐出现断音或听到咔嚓声	作为一种无线技术, 蓝牙对B15与连接手机间的物体很敏感, 根据设计规则, B15与所连接的设备使用距离应保持在8-10米之内, 并且二者之间不应存在大型物体阻隔, 如墙壁等。


更多帮助
 网站: www.*****.com 提供最新支持信息和在线咨询
 免费电话: 400 **** *****
 支持手机拨打。



Bluetooth Speaker User Manual

Thank you for order CAT Bluetooth Speaker, We hope you will enjoying it.

Button Function

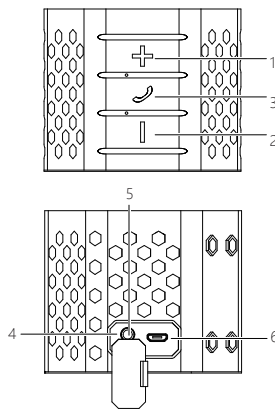

- 1、Volume up/Next song
- 2、Volume down/Previous song
- 3、Phone Key
(Long press to Power On/Off, Short press to Answer/Hang up phone call/Play/Pause)
- 4、3.5mm AUX Port
- 5、Reset(Inside AUX)
- 6、USB

Specifications

Mode: CAT-BT-MINISPK
 Bluetooth Version: Bluetooth V2.1+EDR/4.2
 Bluetooth Range: 8-10m
 Bluetooth Profile:HPF V1.5,HSP V1.2,A2DP V1.2, AVRCP
 Rated Power: 3W
 Frequency Response: 100Hz-16KHz
 SNR: 82 dB
 THD :<10% THD (1KHz-6 dB Input)
 Battery: Built-in 4.2V 600mAh Lithium Battery
 Input: Micro USB 5V 2A
 Charge Time: About 2H
 Playtime: 6 Hours
 Product Size: 78*78*63mm
 Operation Temperature: 0~45°C
 Storage Temperature: -10~60°C

LED Indicator Light

Charge Mode: The red light bright when charge. The red light go out after full charge.
 Pair mode: When pairing state,the red and blue light alternately flash. The blue light steady on after pairing success
 Play: The blue light flashes slowly
 Pause: The blue light steady on
 Call status: The blue light flashes slowly during the call

Package Include

- | | |
|----------------------|-------|
| 1、Bluetooth Speaker | 1 PCS |
| 2、USB charging cable | 1 PCS |
| 3、3.5mm audio cable | 1 PCS |
| 4、User Manual | 1 PCS |

Wireless Bluetooth Connection

- 1、The B15 speaker will under Bluetooth mode automatically when turn on.
- 2、When pairing state,the red and blue light alternately flash.
- 3、Turn on the Bluetooth of your phone, then search and find the device named“CAT-BT-MINISPK”, Please click it and wait for connection.The blue indicator light steady on after pairing success

Tips: Please restart or maybe the battery power not enough if the connection fails

Function Description

- 1、Power On/Off:
Long press the Phone Button(3) to turn on the speaker, You will hear the prompt when turn on. And the red and blue light alternately flash.Long press the Phone button(3) again to turn off the speaker.
- 2、Low battery:
Products in the Bluetooth mode to use the process of continuous interval of 10 seconds to hear a “Di” prompt sound prompt is low battery, automatically shut down after 5 times
- 3、AUX Mode:
Please short press Phone button(3) to pause when

4. Bluetooth Mode:

After the Bluetooth connection is successful, turn on the Bluetooth device to play music.Short press “+/-” button to adjust the volume.Long press “+/-” button to pick a song Short press Phone button(3) to Play/Pause

5. Hands-free call :

After the Bluetooth speaker is connected with the mobile phone successfully. The speaker will have a prompt when there is a call. Press the Phone button to answer the phone call. Short press to hang up the call during a call. And long press for 1 second to reject the call when you have a call.

6. TWS:

- ① First: Turn on these twin speakers at the same time
Second: Select one of the products and long press the “+” button (1) for 3 seconds. Waiting for two products to interconnect, after connection, the blue light of one product will steady on, and the red and blue light of another product will alternately flashing.
Third: Turn on the Bluetooth of your phone, search and find the device named“CAT-BT-MINISPK”, then pair with them.
Finally: Play music to experience true wireless stereo sound after pairing success.
- ② Please clear the mobile phone Bluetooth pairing record “CAT-BT-MINISPK” when the Bluetooth connection is unsuccessful. Re-search the “CAT-BT-MINISPK” bluetooth and reconnect.

Attention

- Please store and use this product in a normal temperature environment;
- Please don't expose this product in the rain or moisture environment;
- Please don't throw away to avoid damage products
- Please don't disassemble,repair and modify this product;
- The product built-in lithium battery, please don't arbitrarily discard it or put it in the fire to avoid danger!
- Please quickly unplug the charging cable if the sudden abnormal phenomenon to avoid accident, and please contact with our after-sales department for maintenance in time

Tips

- 1、To help extend the life of the speaker an your physical and mental health,Please don't listento long time in a large volume, so as not to damage ytour hearing.
- 2、In the event of a malfunction, turn off the power switch immediately and unplug the USB plug to prevent damage to the speakers and other components.
- 3、Low battery will affect the Bluetooth distance or Bluetooth is easy to disconnect, please charge in time.

Ask and Answer

Questions	Answer
No any sound	1、Please press the Volume Up 2、Please make sure that the Bluetooth speaker is paired or connect to the downloaded play device.
Can not answer/hand up the phone call	These features depend on the ability of your phone to support hands-free, so some devices do not support it. Please refer to user manual of your device.
Can connect more than one speaker to a single device?	Please don't connect with two Bluetooth device at the same time.
Can not be connected with speaker via wireless	Please make sure your mobile phone turn on the Bluetooth device that it is connected. Please refer to the user manual.
Music staccato or Hear crackling	As a wireless technology, Bluetooth is very sensitive to the objects that are connected to the phone. Bluetooth speaker is designed to be used within 10 meters,without a major object in between(Wall etc).



FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To assure continued compliance, any changes or modifications not expressly approved by the party.

Responsible for compliance could void the user's authority to operate this equipment. (Example- use only shielded interface cables when connecting to computer or peripheral devices).

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

RF warning statement:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.