



FCC TEST REPORT

Test report
On Behalf of
JMTek Industries(Shenzhen) Co., Ltd
For
Phone Holder with Wireless Charger
Model No.: PHW600, PHW700, PHW800

FCC ID: 2APU5PHW600

Prepared for: JMTek Industries(Shenzhen) Co., Ltd

14G, Innovation Tech Building, Quanzhi Science and Technology innovation

Park, ShaJing Street, Bao'an District, ShenZhen 518104, China

Prepared By: Shenzhen HUAK Testing Technology Co., Ltd.

1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,

Bao'an District, Shenzhen City, China

Date of Test: Jan. 15, 2019 ~ Jan. 22, 2019

Date of Report: Jan. 22, 2019

Report Number: HK1901150204-1E



TEST RESULT CERTIFICATION

Applicant's name:	JMTek Ind	dustries(Shenzhen) Co., Ltd			
Address:	14G, Innovation Tech Building, Quanzhi Science and Technology innovation Park, ShaJing Street, Bao'an District, ShenZhen 518104, China				
Manufacture's Name:	JMTek Industries(Shenzhen) Co., Ltd				
Address:	14G, Innovation Tech Building, Quanzhi Science and Technology innovation Park, ShaJing Street, Bao'an District, ShenZhen 518104, China				
Product description					
Trade Mark:	N/A				
Product name:	Phone Ho	older with Wireless Charger			
Model and/or type reference :	PHW600,	PHW700, PHW800			
Standards:		es and Regulations Part 15 Subpart C (Section 15.209), 3.10: 2013			
	ges resultind context.	Technology Co., Ltd. takes no responsibility for and will ng from the reader's interpretation of the reproduced Jan. 15, 2019 ~ Jan. 22, 2019 Jan. 22, 2019 Pass			
Testing Engine	eer :	Gary Qian)			
Technical Mar	nager :	Edon Hu			
		(Eden Hu)			

Authorized Signatory:

Jason Zhou

(Jason Zhou)





Table of Contents	Page
1 . TEST SUMMARY 1.1 TEST PROCEDURES AND RESULTS 1.2 TEST FACILITY	4
1.3 MEASUREMENT UNCERTAINTY	4 4
2. GENERAL INFORMATION	5 5
2.1 General Description of EUT2.2. Carrier Frequency of Channels	6
2.3 Operation of EUT during testing	6
2.4 Description of Test Setup	6
2.5 Measurement Instruments List	7
3. CONDUCTED EMISSION TEST	8
3.1 Block Diagram of Test Setup	8
3.2 Conducted Power Line Emission Limit3.3 Test Procedure	8
3.4 Test Result	8
4. Occupied Bandwidth	11
4.1 Block Diagram of Test Setup	11
4.2 Rules and specifications	11
4.3 Test Procedure	11
4.4 Test Result	11
5. RADIA TED EMISSIONS5.1 Block Diagram of Test Setup	13 13
5.2 Rules and specifications	13
5.3 Test Procedure	15
5.4 Test Result	15
6 ANTENNA REQUIREMENT	18
7. PHOTOGRAPH OF TEST	19
7.1 Radiated Emission	19
7.2 Conducted Emission	20





1. TEST SUMMARY

1.1 TEST PROCEDURES AND RESULTS

DESCRIPTION OF TEST	RESULT
CONDUCTED EMISSIONS TEST	COMPLIANT
RADIATED EMISSION TEST	COMPLIANT
OCCUPIED BANDWIDTH MEASUREMENT	COMPLIANT
ANTENNA REQUIREMENT	COMPLIANT

1.2 TEST FACILITY

Test Firm : Shenzhen HUAK Testing Technology Co., Ltd.

Address 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai

Street, Bao'an District, Shenzhen City, China

1.3 MEASUREMENT UNCERTAINTY

Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2 Radiated emission expanded uncertainty(9kHz-30MHz) = 3.08dB, k=2 Radiated emission expanded uncertainty(30MHz-1000MHz) = 4.42dB, k=2 Radiated emission expanded uncertainty(Above 1GHz) = 4.06dB, k=2



2. GENERAL INFORMATION

2.1 General Description of EUT

Equipment	Phone Holder with Wireless Charger	
Model Name	PHW600	
Serial No.	PHW700, PHW800	
Model Difference	All model's the function, software and electric circuit are the same, only with a product color and model named different. Test sample model: PHW600.	
Trade Mark	N/A	
FCC ID	2APU5PHW600	
Antenna Type	Coil Antenna	
Antenna Gain	1dBi	
BT Operation frequency	125KHz	
Number of Channels	1	
Modulation Type	ASK	
Power Source	DC voltage	
Power Rating	Input voltage: DC5V 2A From adapter	
1 Ower Italing	Output voltage: DC5V 1A	





2.2. Carrier Frequency of Channels


Operation Fr	Operation Frequency each of channel				
Channel	Frequency				
1	125KHz				

2.3 Operation of EUT during testing Operating Mode

The mode is used: Transmitting mode

2.4 Description of Test Setup

Operation of EUT during testing

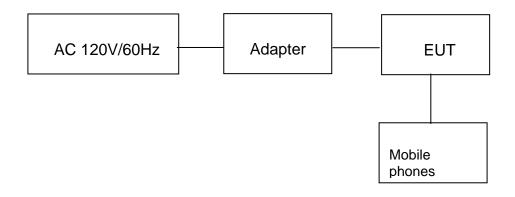

Setup:Transmission mode

Adapter information

Model: HW-059200CHQ

Input: 100-240V~, 50/60Hz, 0.5A

Output: 5VDC, 2A

Mobile phones information

Model: S6 Input: 5VDC





2.5 Measurement Instruments List


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Dec. 27, 2018	1 Year
2.	Receiver	R&S	ESCI 7	HKE-010	Dec. 27, 2018	1 Year
3.	RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2018	1 Year
4.	Spectrum analyzer	R&S	FSP40	HKE-025	Dec. 27, 2018	1 Year
5.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2018	1 Year
6.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 27, 2018	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Dec. 27, 2018	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Dec. 27, 2018	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 27, 2018	1 Year
10.	Horn Antenna	Schewarzbeck	9120D	HKE-013	Dec. 27, 2018	1 Year
11.	Pre-amplifier	EMCI	EMC051845 SE	HKE-015	Dec. 27, 2018	1 Year
12.	Pre-amplifier	Agilent	83051A	HKE-016	Dec. 27, 2018	1 Year
13.	EMI Test Software EZ-EMC	Tonscend	JS1120-B Version	HKE-083	Dec. 27, 2018	N/A
14.	Power Sensor	Agilent	E9300A	HKE-086	Dec. 27, 2018	1 Year
15.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2018	1 Year
16.	Signal generator	Agilent	N5182A	HKE-029	Dec. 27, 2018	1 Year
17.	Signal Generator	Agilent	83630A	HKE-028	Dec. 27, 2018	1 Year
18.	Shielded room	Shiel Hong	4*3*3	HKE-039	Dec. 27, 2017	3 Year





3. CONDUCTED EMISSION TEST

3.1 Block Diagram of Test Setup

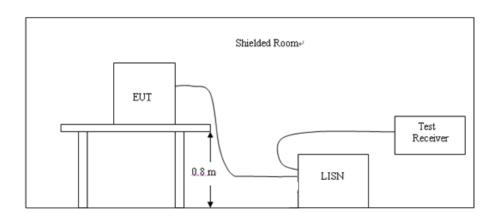

3.2 Conducted Power Line Emission Limit

According to FCC Part 15.207(a)

Eroguanav	M	Maximum RF Line Voltage (dBμV)				
Frequency (MHz)	CLAS	CLASS A		CLASS B		
(11112)	Q.P.	Ave.	Q.P.	Ave.		
0.15 - 0.50	79	66	66-56*	56-46*		
0.50 - 5.00	73	60	56	46		
5.00 - 30.0	73	60	60	50		

^{*} Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207Line Conducted Emission Limit is same as above table.

3.3 Test Procedure


- 1, The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2, Support equipment, if needed, was placed as per ANSI C63.10.
- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes

3.4 Test Result PASS



Please refer to following diagram for individual

Test Specification: Line

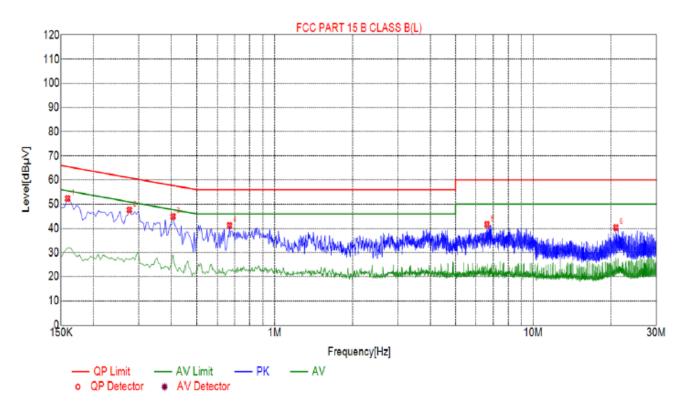


Susp	Suspected List						
NO.	Freq.	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Detector	
1	0.1590	52.34	10.01	65.52	13.18	PK	
2	0.2760	47.63	10.04	60.94	13.31	PK	
3	0.4065	44.96	10.03	57.72	12.76	PK	
4	0.6675	41.22	10.05	56.00	14.78	PK	
5	6.6300	41.62	10.21	60.00	18.38	PK	
6	20.9220	40.39	10.13	60.00	19.61	PK	

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level



Test Specification: Neutral

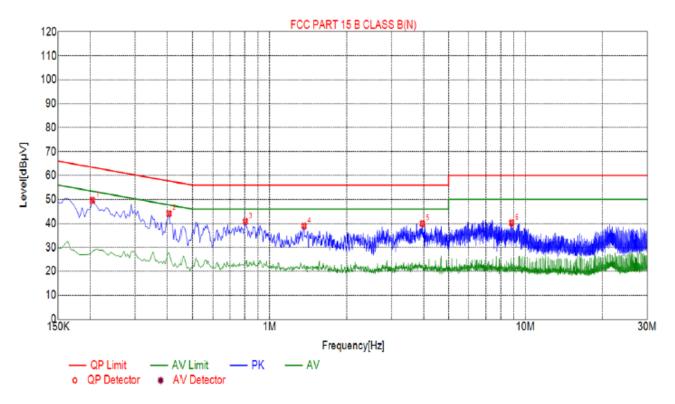


Susp	Suspected List						
NO.	Freq.	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Detector	
1	0.2040	49.64	10.04	63.45	13.81	PK	
2	0.4065	44.13	10.03	57.72	13.59	PK	
3	0.8025	40.77	10.06	56.00	15.23	PK	
4	1.3605	38.91	10.11	56.00	17.09	PK	
5	3.9525	39.97	10.25	56.00	16.03	PK	
6	8.8305	40.32	10.11	60.00	19.68	PK	

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level



4. Occupied Bandwidth

4.1 Block Diagram of Test Setup

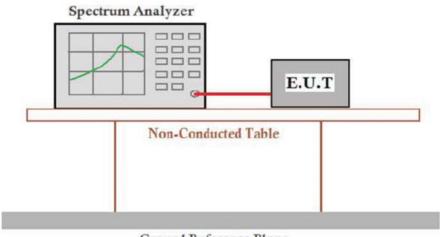

Ground Reference Plane

4.2 Rules and specifications

CFR 47 Part 15.215(c)

ANSI C63.10-2013


4.3 Test Procedure

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equip compliance with the 20dB attenuation specification may base on measurement at the intentional radiator's antenna output terminal unless the intentional radiator uses a permanently attached antenna, in which case compliance shall be deomonstrated by measuring the radiated emissions.

4.4 Test Result PASS

Mode	Freq (KHz)	20dB Bandwidth (KHz)	Limit (kHz)	Conclusion
Tx Mode	125	2.851	/	PASS




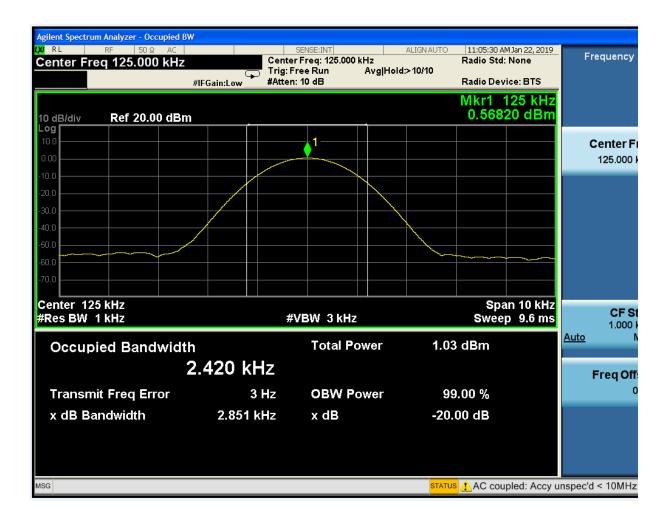




5. RADIA TED EMISSIONS

5.1 Block Diagram of Test Setup

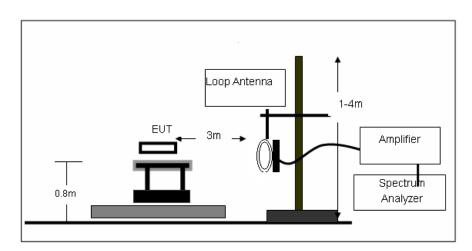

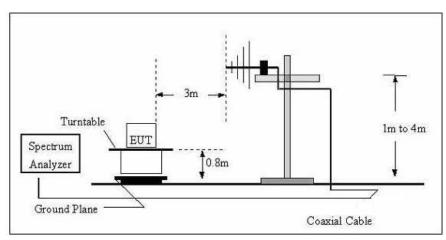



5.2 Rules and specifications

CFR 47 Part 15, section 15.205

Only spurious emissions are permitted in any of the frequency bands listed the tables in these sections.

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
\1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293.	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(\2\)
13.36-13.41			

CFR 47 Part 15, section 15.209

The emissions from an intentional radiator shall not exceed the limits in the tables in these sections using an average detector

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88–216	150**	3
216-960	200**	3
Above 960	500	3

Limit calculation and transfer to 3m distance as showed in the following table:

Frequency	Frequency Limit			
(MHz)	(dBuV/m)	(m)		
0.009-0.490	20log(2400/F(KHz))+40log(300/3)	3		
0.490-1.705	20log(24000/F(KHz))+40log(300/3)	3		
1.705-30.0	69.5	3		
30-88	40.0	3		
88-216	43.5	3		
216-960	46.0	3		
Above 960	54.0	3		

CFR 47 Part 15, section 15.35

When average radiated emission measurements are specified, the limit on the peak level of the radio Frequency emission is 20dB above the maximum permitted average emission limit.

Transmitter Spurious Emissions 9KHz-30MHz						
	490KHz-30MHz					
Resolution Bandwidth	200Hz	9KHz	9KHz			
Video Bandwidth	2KHz	100KHz	100KHz			
Detector	Peak	Peak	Peak			
Trace Mode	Max Hold	Max Hold	Max Hold			
Sweep Time Auto Auto Auto						



5.3 Test Procedure

Measurement distance 3m

For the measurement range up to 30MHz in the following plots the field strength result from 3m Distance measurement are extrapolated to 300m and 30m distance respectively, by 40dB/decade, According to part 15.31(f)(2), per antenna factor scaling.

Measurements below 1000MHz are performed with a peak detector and compared to average limits, Measurements with an average detector are not required.

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.

5.4 Test Result

PASS

For 9KHz-30MHz


Freq. (MHz)	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limits 3m (dBuV/m)	Margin (dBuV/m)
0.110	Peak	25.07	24.80	49.87	126.77	76.90
0.125	Peak	46.37	24.80	71.17	125.67	54.50
0.486	Peak	26.16	25.03	51.19	113.71	62.52
0.500	Peak	26.75	25.03	51.78	113.62	61.84



For 30MHz-1GHz

Please refer to following diagram for individual

Antenna polarity: H

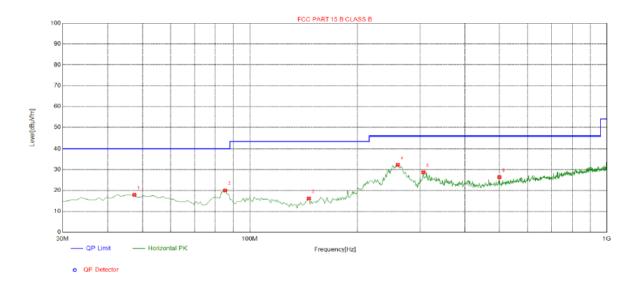


Suspected List									
NO.	Freq.	Level	Factor	Limit	Margin	Height	Angle	Delevity	
	[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]	Polarity	
1	47.4600	17.89	-13.65	40.00	22.11	100	206	Horizontal	
2	85.2900	20.00	-18.20	40.00	20.00	100	149	Horizontal	
3	146.400	16.15	-19.03	43.50	27.35	100	283	Horizontal	
4	259.890	32.31	-13.52	46.00	13.69	100	181	Horizontal	
5	306.450	28.69	-12.65	46.00	17.31	100	117	Horizontal	
6	500.450	26.45	-8.29	46.00	19.55	100	334	Horizontal	

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level



Antenna polarity: V

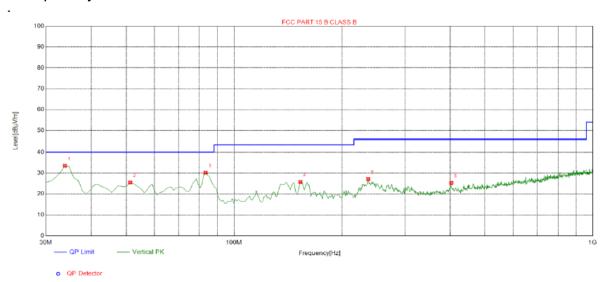

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	33.8800	33.48	-16.19	40.00	6.52	100	198	Vertical
2	51.3400	25.50	-13.85	40.00	14.50	100	54	Vertical
3	83.3500	30.15	-18.67	40.00	9.85	100	54	Vertical
4	153.190	25.80	-18.71	43.50	17.70	100	214	Vertical
5	236.610	27.14	-14.01	46.00	18.86	100	195	Vertical
6	403.450	25.27	-10.34	46.00	20.73	100	86	Vertical

 $\label{eq:Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit - Level} \\$



6 ANTENNA REQUIREMENT

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The antenna used in this product is a Coil Antenna, The directional gains of antenna used for transmitting is 1dBi.

<u>ANTENNA</u>

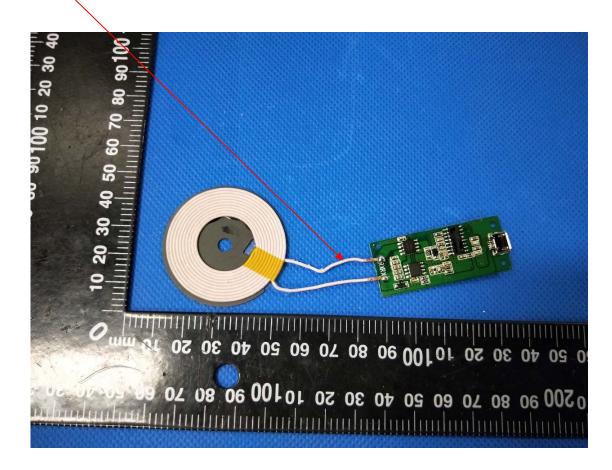



7. PHOTOGRAPH OF TEST

7.1 Radiated Emission







7.2 Conducted Emission

