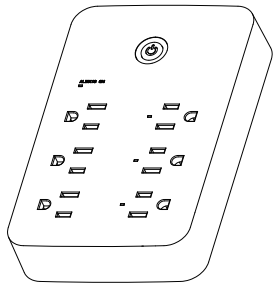




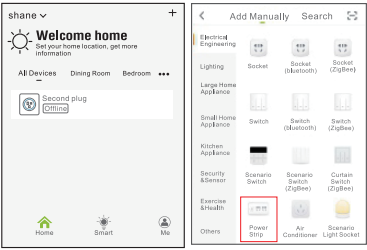
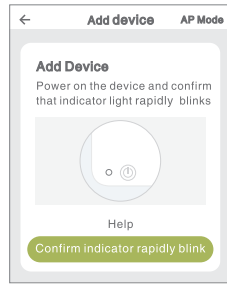
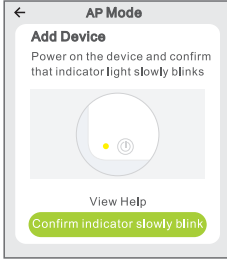



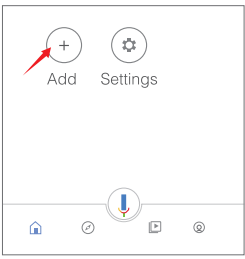
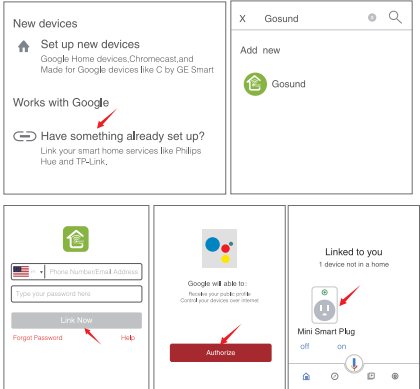
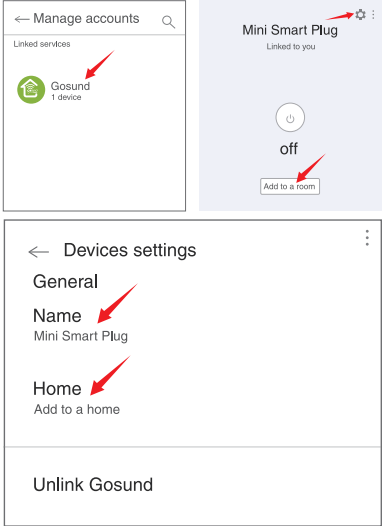



料号: 4.02.000.0338 V1.0  
名称: P2说明书 gosund  
尺寸: 60\*80mm/128g双铜对粉/7折页 Gosund

<div><p>Smart Power Strip</p><p>Any problems please follow Gosund on  and consult the service staff</p></div>	<div><p>►What's in the Box Smart Power Strip User Manual</p><p>►At a Glance</p><p>1. ON/OFF Button 2. Standard AC Ports 3. "ALWAYS ON" AC Ports 4. Three USB Ports(Share the same switch)</p><p>Note: ON/OFF button can also be used as a factory reset button- simply press and hold the button. Only do this if you want to erase the socket's current settings.</p></div>	<div><p>►USB / AC CHARGING OUTLET</p><p>Input: 100-240V, 16A Max Output: 16A AC Frequency : 50/60Hz Wi-Fi Frequency: 2.4GHz Maximum Power Output: 1920W/120V</p><p>►Download “Gosund” APP</p><p>1. Search “Gosund” APP on APP Store, Google Play or scan the QR code below and install it.</p><p>2. Please open the “Gosund ” APP. Click register and type in your email address to automatically create an account, otherwise type in your phone number to get a verification code to register an account. If you already have a “Gosund” account, simply click login with your account.</p></div>	<div><p>1.The free APP “Gosund” is compatible with mobile devices that supports IOS 8.0 above and Android4.4 above.</p><p>Gosund</p><p>►Connecting Smart Charging outlet “Gosund” APP</p><p>A. Easy Mode (Recommend) Please open “Gosund” APP. Tap the “Add Devices”or the “+” sign at the upper right hand corner of the page and select “Electrical Engineering”, then select “Power Strip”. Please also make sure that the Smart Power Strip is connected at the same time.</p><p>1. Then long press on/off button of the device for about 5 seconds until indicator light rapidly blinks.</p></div>	<div><p>2. Make sure the indicator light is flashing rapidly and confirm it in APP.</p><p>3. Choose your home Wi-Fi (make sure the Wi-Fi connection you choose is the same connection/ Wi-Fi you used on your phone/ device and it should be 2.4 GHz not 5GHz). Enter the correct password and confirm. If Wi-Fi is 5 GHz or the password is in correct, it will lead to “connection failure”.</p></div>	<div><p>4. Wait to successfully configure, then tap “Done”.</p><p>B. AP Mode</p><p>1. Please switch to “AP Mode” if the connection fails in “Easy Mode”;</p></div>	<div><p>2. Long press on/off button until the indicator light flashes slowly;</p><p>3. Make sure the indicator light is flashing slowly and confirm it in APP;</p><p>4. Choose your 2.4G Wi-Fi and enter the password and confirm it in APP;</p><p>5. Tap “Connect now” and choose Wi-Fi hotspot named “SmartLife-xxx”, then go back to Gosund application;</p></div>
<div><p>6. Wait till successful configuration and then tap “Completed”.</p><p>Note: if the connection fails in “AP Mode”, please check if your router is dual-band Wi-Fi. If it is dual-band Wi-Fi, please enter the router management interface to split 2.4G and 5G Wi-Fi, and then connect 2.4G Wi-Fi.</p><p>►Enable Our Skill in Alexa APP</p><p>1. Choose“Skills &amp; Games” in the options bar, and then search “Gosund ” in the search bar; Select “Gosund ” in the search bar results, and then click “Enable.”</p><p>2.Type in the username and password that you had previously registered.(Only support the account in the United States) Then click “Gosund” and “Authorize”. When you see the below page, it means the Alexa account is linked with Gosund account.</p></div>	<div><p>►Control Smart Power Strip by Voice</p><p>After the previous operation, you can control the Smart Power Strip via Echo.Firstly, users need to say to Echo, “Echo or Alexa, discover my devices.”</p><p>1. Discovering Devices Echo will start to find the devices which is added in “Gosund ” APP. It will take about 20 seconds to show the result. Or you may click “Discover devices” onthe Alexa APP, and it will successfully show available devices.</p></div>	<div><p>Note: “Echo” is one of the three wake-up names, the other two names are Alexa/Amazon.</p><p>2. Supports Skill List User can control devices by instructions like below: “Alexa, turn on/off (name of the power strip).” “Alexa, turn on Switch 1.” “Alexa, turn off Switch 1.”</p><p>Attention: The name of the device must be consistent with the addition of “Gosund ” APP.</p></div>	<div><p>← Add and manage</p><p>Add to home</p><ul style="list-style-type: none"><li>Set up device</li><li>Invite home member</li><li>Create speaker group</li><li>Create new home</li></ul></div>	<div><p>Now click the device that “Linked to you” or open “Works with Google”again to manage your linked devices, follow the steps below and set up the device names, rooms and home for the smart plug, you won’t be able to voice control it before you complete that.</p></div>	<div><p>← Devices settings</p><p>General</p><p>Name Mini Smart Plug</p><p>Home Add to a home</p><p>Unlink Gosund</p></div>	<div><p>►Safety Information</p><p>The device is recommended for indoor use and dry place only.Power outlet shall only be used within its published outlet rating stated on the instructions.</p><p>Please contact the seller for replacement in case there is damage caused by transportation.</p><p>►Warranty 2-years warranty and lifetime support.</p><p>Manufacturer: Shenzhen Gosund Technology Co., Ltd Website: <a href="http://www.gosund.com">www.gosund.com</a> Support Email : <a href="mailto:service@gosund.com">service@gosund.com</a></p><div><p>4.02.000.0338 v1.0</p></div></div>

#### FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

#### Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.