

▶BEFORE YOU INSTALL

WARNING! RISK OF ELECTRIC SHOCK. Incorrect installation could be dangerous or illegal, multiple breakers may need to be de-energized for safe installation. Please call a professional electrician if you are unfamiliar or uncomfortable with electrical work.



Make sure your wiring is compatible. The Gosund fan control & Light dimmer replaces single pole switches only. If your light can be turned on from two different wall switches, that's a 3-way switch and Gosund fan control & Light dimmer is not compatible.



► Install the Gosund Light Switch

Light Switch.

top of it.

hem into the wire nut.

Things to Try

Smart Life

Done ⊕aleax.gosund.com (

Live/Load wires- On this light switch, the Switch wire

are red or black in color. Every light switch will have

both of these wires. But they could be two blacks.

Neutral wire - The Gosund Dimmer Light Switch

requires this wire, but isn't always present in your electrical wiring at home. If present, the neutral wire is

normally found within the wall box with a wire nut on

Ground wire - It's normally green or copper in color.

Step 4: Install the Gosund Dimmer Light Switch.

Connect black wire and red wire from the Gosund

DimmerLight Switch to the available Switch (Live/Load)

wires. In case you found more than one wire, just place

NOTE: The wire nut is the cap-like object connecting

disconnect it from the old switch and connect it to the

Step 6: Unscrew the wire nut that is holding togethe

the existing Neutral wires. Connect the white wire from

the Gosund Dimmer Light Switch to the outlet's exposed

Neutral wires. Securely screw them together inside the


Done ≜ skills-store.amazon.com

amazon alexa

What to do next:

Step 5: If you have a Ground wire (optional),

green wire on the Gosund Dimmer Light Switch.



Step 1: Shut OFF the power at the circuit breaker for the switch you are replacing. You may need to shut OFF more than one circuit breaker/switch to make sure the switch you're working on is powered OFF.

IMPORTANT: USE A NON-CONTACT VOLTAGE DETECTOR OR FLIP YOUR LIGHT SWITCH A FEW TIMES TO MAKE SURE THAT THE POWER IS OFF.

Step 2: Unscrew and disconnect the wires from the old switch using a screw driver.

Step 3: Identify the wires on your Gosund Dimmer ►Install the Gosund App

1. Search for Gosund App on App store /Google Play Store, or just scan the QR code below to download. PS: You can also add this Gosund Dimmer Light Switch to smart life app directly if you already have it on your phone, it is compatible and works the same way.

2. Register an account and memories the password, enter your email address or your phone number, then obtain verification code to complete the registry.



Connect with Your Cellphone

Requirements: 2.4GHz Wi-Fi condition at home A: For Easy Mode Connection- Green Indicator Light Blink Quickly

-> Confirm that the Gosund Dimmer Light Switch is well installed

ALL ON | ALL OFF

Alexa App



--->Open Gosund App--->Choose the "+"symbol,

---> "Wall Switch"

---> Confirm the light status on your switch and follow the App guide. (If you don't see green light quickly blinking, press

On/Off button to reset) ---> Set a unique name for this smart switch, choose

the room location.



Smart Wi-Fi Light Switch, 3-way Kit





-->Long press on/off button until the indicator light flashes slowly:

-->Make sure the indicator light is flashing slowly and confirm it in APP --> Choose your 2.4G Wi-Fi and enter the password

and confirm it in APP. -->Tap "Connect now" and choose Wi-Fi hotspot named "SmartLife-xxx", then go back to Smart Life application;




-->Wait till successful configuration and then tap "Completed".

Note: if the connection fails in "AP Mode", please check if your router is dual-band Wi-Fi. If it is dual-band Wi-Fi, please enter the router management interface to split 2.4G and 5G Wi-Fi and then connect 2.4G Wi-Fi.

► Getting to Know Gosund App



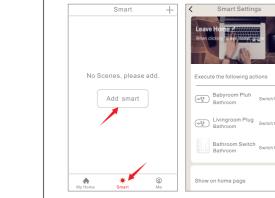


Set timer/schedule

Set device names ∑ Set countdowns

Note: edit the default names in this interface, for better management.

Create Scenes/Groups

You can create certain scenes and groups on Gosund App, it allows you to control different smart devices in different rooms at the same tim

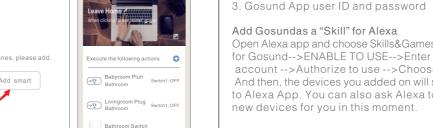

► Device Sharing

If you want to give others the permission to control your smart plug, you can authorize that by device sharing function. Go to the Gosund App--> Choose the device you want to share-->Choose Edit Button -->Choose shared devices -->Add sharing-->Enter his/her Gosund account-->Search and complete.

► How To Connect with Amazon Alexa Requirements:

- 1. Amazon Alexa Device and Alexa App
- 2. The Smart Switch connected with Gosund App

Open Alexa app and choose Skills&Games--> Search for Gosund-->ENABLE TO USE-->Enter the Gosund account --> Authorize to use --> Choose Gosund. And then, the devices you added on will sync to Alexa App. You can also ask Alexa to discover new devices for you in this moment.

How to ask Alexa to turn on/off Smart Switch First you need to set exact name for the switch on Gosund App. If not, Alexa may tells you: "Sorry, I car

find the device named xxx..." You can say to Alexa "Alexa, turn on/off bathroom switch", this command will help you to do the work.

Bathroom Switch Already On Livingroom Plug Already On Gosund App Things you can do with Alexa * Voice Control the smart switch

* Remote Control the smart switch via Alexa App

* Add the smart switch to certain groups on Alexa App For other questions about Alexa, please find out with Amazon Alexa support page, or contact us for help directly by email.

Tips for using Alexa Voice Control

Please make sure the device name you set for the smart switch is unique and recognizable for Alexa voice assistant.

You should make sure all the smart devices names at your home are non-repetitive and recognizable for Alexa

Vocie assistant system needs the exact command

to do the work.

► How To Connect with Google Home

You can do that by link Gosund App with Google Home App, go to Google Home App and find "Works with Google" -->Search Gosund -->Enter your Gosund account --> Authorize to use. And then the Google Home App will guide you through.

Set up Set up new devices or add existing devices and services to your home New devices ♠ Set up new devices

Google home devices, Chromecast, and Made for Google devices like C by GE smart

Works with Google Have something already set up?
Link your smart home services like Philips Hue and TP-Link

-14 -

▶Warranty

90 days money-back guarantee:

If you're not satisfied with this purchase, you can choose to refund this order within 90 days. 12 months limited warranty:

* Device was used in proper technical working condition. * Covers unartificial failures and defections on this

device. Risk of Damage: Not suitable for appliances that exceed 4A Current,

be careful. Do not cover if the device was found artificial disassembled.

▶Contact Us

For any inquiries or comments concerning our products, please send email to: service@gosund.com. Your advice is very much appreciated.

Manufacturer:

Shenzhen Gosund Technology Co., Ltd Website: www. gosund. com Email Support: service@gosund.com

This device complies with part 15 of the ECC Bules. Operation is subject to the condition that this device does not cause harmful interference (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party

responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with

the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not

occur in a particular installation If this equipment does cause harmful interference to radio or television reception,

which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or

more of the following measures - Reorient or relocate the receiving antenna.

-- Increase the separation between the equipment and receiver.

-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-- Consult the dealer or an experienced radio/TV technician for

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body: Use only the



-11-