




# T19 TWS BLUETOOTH HEADSET

PLEASE READ THE INSTRUCTION MANUAL BEFORE OPERATING THE TWS BLUETOOTH HEADSET T19



## Product schematic diagram

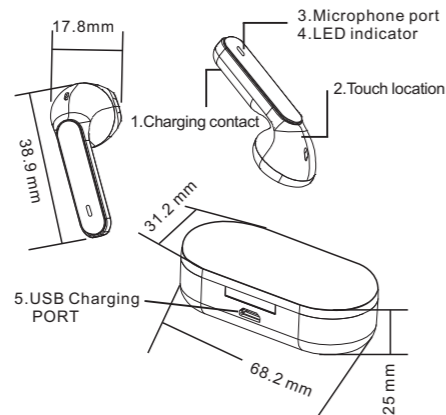

## Product Specification

- ◇ Bluetooth version: V5.0
- ◇ Bluetooth Protocol: a2dp\avctp\avdtp\avrcp\hfp\spp\sm
- ◇ Transmission Range: 10M (Ideal environment without any giant obstacles)
- ◇ Modes Available: HFP/ HSP/ A2DP/ AVRCP
- ◇ Charging Input: 5V/500mA
- ◇ Battery: 220mah for charging box, 25mah for earphone.
- ◇ Charging Time: around 45minutes for charging the charging box, 50 minutes for charging the earbuds.
- ◇ Times for earbuds to be charged by the box: 3 times for dual earbuds, 6 times for single earbud.
- ◇ Playing Time: 3 hours for calling, 2.5 hours for playing music.
- ◇ Standby Time: Around 80 hours .

## Important Notes

- ◇ Do not disassemble the product by yourself.
- ◇ Please use the standard charging cable and 5V charger to avoid damage and accidents.
- ◇ This machine supports left and right ear wear.

## Packing List

- ◇ Bluetooth Earphones
- ◇ Charging box
- ◇ Micro 5pin charging cable
- ◇ Operation manual

## Functional operation instructions

- ◇ Boot  
Take the headset out of the charging compartment and automatically turn it on or press and hold the left and right headset multifunction touch button for 3 seconds
- ◇ Shut down  
Put the headset into the charging compartment and turn it off automatically. Press and hold the left and right headset multifunction touch button for 5 seconds to shut down.
- ◇ Boot back  
When the pairing is successful, the bluetooth headset preferentially enters the connected state when the second time is turned on, and automatically connects back to the connected mobile phone.

- ◇ Play/pause  
In the standby mode, click the left and right earphones multi-function touch keys to play music directly. When playing, click the left and right earphones multi-function touch keys to pause playback.
  - ◇ Call answering  
When the mobile phone calls, click the left and right earphones multifunction touch button to answer the call.
  - ◇ Call hang up  
When the phone is talking , click the left and right earphones multi-fuction touch button to hang up the phone.
  - ◇ Call rejection  
When the mobile phone calls, long press the left and right headphones multi-function touch button for 2 seconds to reject the call.
  - ◇ Redial  
While on standby or playing music, you can dial the last call you made in your call history by tapping the left headset multifunction touch button.
  - ◇ Low battery prompt  
When the battery of the bluetooth headset is low, the low battery tone will be played every 30 seconds untill the headset is powered off.
- Pairing method**
- ◇ Bluetooth name : T19

- ◇ Make the earphones power on by taking them out from the charging box or long pressing the multifunction touch button of left and right earphone at the same time for 3 seconds. Warning tone "power on" and the blue light and red light flash alternatively, at the same time, earphones enter searching and pairing status. Warning note "Pairing" means entering automatic pairing of two earphones. After paired successfully, the main earphone flashes alternatively with red and blue light, the sub earphone flashes with slow blue light, at the same time, playing warning tone "connected".
- ◇ Enable Bluetooth on your phone or other device. For Android, please click "search Bluetooth device" on your phone. For IOS mobile phones or devices, it would automatically search for devices; After searching Bluetooth name "T19", click it to enter pairing; When the pairing is successful, the main earphone would play tone "connected" which means the connection is successful and the lights in the left and right earphones would all go out.
- ◇ The two earphones can also be paired with the phone separately. Same operation method as two steps as above. seconds.

## Charging operation

- The earphone can be charged automatically by putting it into the charging bin. The indicator light of the earphone will be red when charging, and the indicator light above the charging box will be on. It would be off after full.
- External USB charging. When charging, the indicator light above the charging box begins to flash. When all four lights are on, it means it is fully charged. When the discharge quantity drops to the corresponding quantity, the corresponding indicator light goes off.

## Precautions

- Please charge in a safe environment. When charging the charging compartment, please charge the charging compartment separately from the USB charging cable as soon as the charging indicator indicates full power, so as to avoid damage to the charging compartment after a long time of charging.
- When playing music, please adjust the music to the appropriate volume to avoid hearing damage at high volume for a long time.
- Try to avoid using the headset in a place with interference sources, otherwise it may affect the headphone signal.
- Try to avoid using the headset in a corrosive environment to avoid affecting the function of the headset.

Special Tips: When you use it for the first time, please tear off the protective film on the earphones. Then connect the power adapter with the attached data cable for half an hour to achieve the best use of the built-in battery. When using the bluetooth headset to listen to music or talk, please pay attention to adjust the volume, so as not to affect your listening!

#### FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.