

# Tronsmart

## Element T6 Mini Wireless Speaker


### USER MANUAL

**English**

Thank you for purchasing the Tronsmart Element T6 Mini Wireless Speaker. Please read the user manual before use and keep it handy for future reference. If you have trouble understanding or following the instructions in this manual, please contact our customer support team directly at: [support@tronsmart.com](mailto:support@tronsmart.com)





**Overview**

- ① Power On/Off; TWS pairing; Reset
- ② Volume -; Previous track
- ③ Play/Pause; Hands-free phone call; Bluetooth disconnect; Voice Assistant
- ④ Volume +; Next track
- ⑤ Bluetooth indicator
- ⑥ TWS/Charging indicator
- ⑦ Microphone
- ⑧ USB-C charge
- ⑨ TF/Micro SD card slot
- ⑩ AUX-IN port




**Package Content**

- 1 x Element T6 Mini wireless speaker
- 1 x USB charging cable
- 1 x 3.5mm audio cable
- 1 x Detachable strap
- 1 x Warranty card
- 1 x User manual

	Power On: Hold for 1 second. Power Off: Hold for 3 seconds. TWS pairing: Detailed operation refers to the following 'TWS' section. Hold for 8 seconds to power off forcedly if the speaker malfunctions.
	Play/Pause: Tap to play or pause the music. Answer/End a phone call: During an incoming call, tap to answer and hang up a phone call. Reject a phone call: During an incoming call, hold for 3 seconds to reject a phone call. Redial: During Bluetooth connected mode, double tap to redial the last dialed-out number. Bluetooth disconnect: Hold for about 8 seconds to disconnect Bluetooth. Voice Assistant: During Bluetooth connected mode, hold for about 5 seconds to access your personal assistant from your mobile device.
	Volume -: Tap to decrease the volume.
	Previous track: Hold to choose previous track. Volume +: Tap to increase the volume. Next track: Hold to choose next track.


**How to Use**



**1. Turn On/Off**

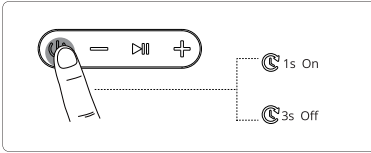

**2. Bluetooth Connection**


Turn on the speaker, then turn on your device's Bluetooth setting, search for 'Tronsmart Element T6 Mini' and tap to connect.

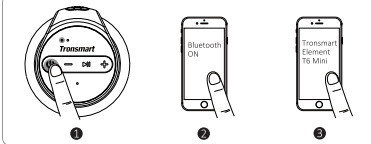


	Flashing blue	Bluetooth pairing mode
	Steady blue	Connected to device successfully



**3. True Wireless Stereo - Pair Two T6 Mini**

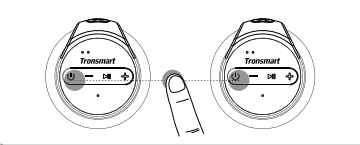a) Turn on the two speakers and confirm that both are disconnected from any Bluetooth devices.

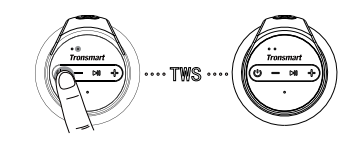



b) Double-tap the Power On/Off button of either speaker quickly, then the two speakers will enter pairing mode. After the two speakers have paired with each other successfully, you will hear a sound prompt and the TWS indicator of both speakers are steady yellow.



	Flashing yellow	True Wireless Stereo pairing mode
	Steady yellow	Connected to True Wireless Stereo mode

c) Pair the speaker with your device.

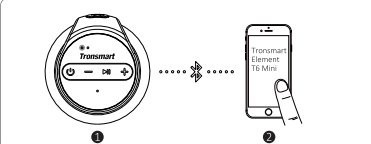

	Steady blue	Connected to your device
---	-------------	--------------------------

**4. Disconnect Two T6 Mini**

Double tap the Power On/Off button of either speaker to disconnect two T6 Mini's from each other. The TWS indicator will go off after disconnecting successfully.

**5. Activate Voice Assistant**

During Bluetooth connected mode, hold the Play/Pause button for about 5 seconds to activate your personal assistant from your mobile device.

**6. TF/Micro SD Card Mode**

The speaker will play audio from your TF/Micro SD card when the card is plugged into the slot. The memory capacity should be no more than 64 GB.

**7. AUX-IN Mode**

Simply connect the speaker with your non-Bluetooth device and the 3.5mm audio jack cable.

Note: Plugging in an audio cable will automatically switch to AUX mode. When using AUX mode, control audio playback via the connected device.



**8. Auto-power Off**

The speaker will power off automatically after 10 minutes if it

does not pair with any device via Bluetooth or does not play any sound after turning on. When in low battery, the speaker will power off automatically as well.

**9. Charging**

Use the included USB cable to charge your T6 Mini and make sure it is fully charged before its first use.

	Charging indicator - Stable red	Charging
	Charging indicator - Off	Fully charged

**10. Reset to Factory Setting**

Hold for 8 seconds to power off forcedly if the speaker malfunctions.

**Specifications**

Model	Element T6 Mini
Bluetooth	5.0
Bluetooth compatibility	A2DP / AVRCP / HFP
Output (watt)	15W max.
Transmission distance	Up to 30m/100ft (open area)
Frequency range	20Hz - 16000Hz
Waterproof	IPX6
Playtime	Up to 24 hours (50% volume level)
Talk time	Up to 20 hours (50% volume level)
Standby	24 months
Battery	2500 mAh
Charge input	DC 5V/2.1A
Charging time	About 3 hours
Dimension	92 x 92 x 120 mm / 3.62 x 3.62 x 4.72 inches
Weight	560 ± 5 g / 19.8 ± 0.2 oz

**Care & Maintenance**

Do not use any form of detergents or cleaning material to clean the product as any type of chemical may make this device unusable. Do not disassemble this product. It contains no user serviceable parts. Do not drop or jump on it and treat it with care for the best performance. Keep the product in a dry location. Dust, dirt & moisture from humidity can accumulate on the body of the product if kept at an unfriendly place. Do not dispose this product in fire or batteries may explode or leak.

**Warranty Information**

Your 'Tronsmart Element T6 Mini', is warranted to the original owner for 12 months from the date of purchase against defects in material and workmanship under normal use and service. Tronsmart is not responsible for the accidental use of this product and its liability will not exceed the purchase price of the product. If you have any problems while using the product, please do not hesitate to contact our customer support team at [support@tronsmart.com](mailto:support@tronsmart.com).

**FCC STATEMENT**

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: 1) this device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the


instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Radiation Exposure Statement






This device complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.



SHENZHEN VALUE IN ACTION TECHNOLOGY CO., LTD.

A3 Hekan Industrial Building, 41# Wuhe Str,  
Bantian, Longgang District, 518129 Shenzhen, China

Email: [support@tronsmart.com](mailto:support@tronsmart.com)  
800-270-1082 (USA & Canada)  
+86-755-23603740 (Global)

[www.tronsmart.com](http://www.tronsmart.com) Made in China