
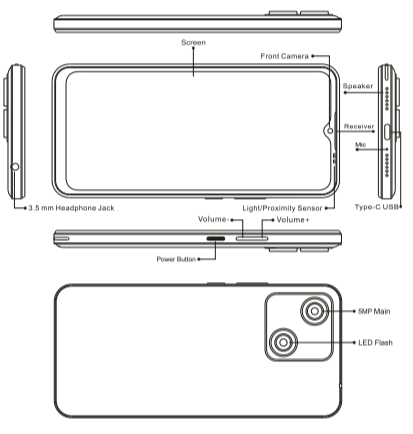
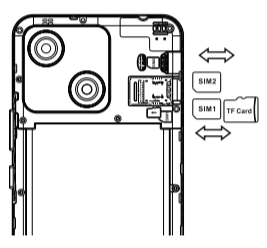

 <p>Thank you for choosing FOXxD smart phone. Please follow the instructions when start using this product.</p> 	<p><b>PRODUCT HEX-VISION IMAGE</b></p>  <p><b>POWER BUTTON:</b> Long press to turn on/off the device. When the device is on, short press to switch on/off the screen.</p> <p><b>VOLUME BUTTON:</b> Short press to adjust the volume or mute ringtones.</p> <p style="text-align: center;">1</p>	<p><b>CARD INSERT MANUAL</b></p> <p><b>Insert Nano-SIM Card</b> Turn off the phone. Remove the battery cover. Insert 1 or 2 nano-SIM cards into the SIM slots. Make sure the notched edges match the indication at the SIM slots. You can also install a micro-SD card. Please insert the micro-SD card with the gold contact facing down in the micro-SD tray. Put the battery cover back and power on the phone.</p>  <p><b>Caution:</b> Please use standard nano-SIM card only. Non-standard SIM or hand-cut SIM card may damage the SIM tray or phone and causes SIM rejection situation. Always turn off the phone before installing or replacing SIM card or micro-SD card. The micro-SD card does not come with the phone. Please purchase it separately.</p> <p><b>DUAL-SIM MANAGEMENT</b> Turn on the phone. Click "Settings"&gt;"SIM card". Make one of the SIM cards the main one which will carry the mobile data. Choose the preferred network types of 4G/3G/2G in "Settings"&gt;"Network and Internet"&gt;"Mobile Network"&gt;"Preferred Network type".</p> <p style="text-align: center;">2</p>	<p><b>NETWORK CONNECTION</b></p> <p><b>Connect to WLAN</b> Click "Settings"&gt;"Network and Internet"&gt;"WiFi". When WLAN is on, a list of available WiFi connections will appear. Click the one you want to connect, enter the password if the network is encrypted, then click "Connect".</p> <p><b>Bluetooth function</b> Click "Settings"&gt;"Connected Device"&gt;"Bluetooth". Turn on Bluetooth function. Select "Refresh", the phone will search for Bluetooth devices available for pairing.</p> <p>Choose one from the device list which you want to pair with. Click "Pair" in the dialog box to pair the device with the phone.</p> <p>Slid down twice the status bar to open the shortcut switches for Bluetooth and other functions.</p> <p><b>WiFi hot-spot</b> Click "Settings"&gt;"Network &amp; Internet"&gt;"Hotspot &amp; tethering"&gt;"WiFi Hotspot" to turn on the portable WiFi Hotspot function. Enter your network name and password, then click "Save". The WiFi hotspot is now ready for sharing the network.</p> <p>Please make sure to turn on the mobile data before going to the network sharing function. When the network sharing function is on, your mobile traffic will be shared by other devices.</p> <p style="text-align: center;">3</p>																																																		
<p><b>CAMERA</b></p> <p>Turn on "Camera", the camera will automatically focus on the objects. Touch the screen, the camera will shift the focus to the chosen object. Then click "Capture" button to take a photo. Video, camera modes and more camera applications can be found in the camera menu.</p> <p><b>DUAL SIM DUAL SATANDBY</b></p> <p>Dual SIM dual standby means that you can insert two SIM cards and have them both standby for incoming calls. Once a phone call is activated, the other SIM card is not available for both incoming and outgoing calls.</p> <p>For more information, please visit Android's official site: <a href="https://www.android.com/">https://www.android.com/</a></p> <p><b>SECURITY INFORMATION</b></p> <p>Security information (including BS, ES, battery security information) of third-party software installation and function may vary in different regions or by different hardware specifications. FOXxD holds disclaimer for the performance problem or incompatibility caused by third-party applications, registry editing, OS software modifying. Customizing the OS may cause the device or some applications fail to work properly.</p> <p>Please prevent the device or the battery in extreme cold/hot condition. The extreme temperature will lead to deformation of the phone and reduce the charging capacity and battery life.</p> <p>Please only use the custom designed and approved battery and charger by FOXxD. Incompatible battery and recharger may cause damage to the phone. Please abide by local regulation when disposing of the used batteries and phones.</p> <p>Please do not place the battery or the phone onto or inside heating devices such as microwave, oven or radiator. The battery may explode if it gets too hot.</p> <p>Please do not crush or pierce the battery. Prevent the battery from getting high pressure from outside, it may cause internal short and overheating</p> <p style="text-align: center;">4</p>	<p><b>SPECIFICATIONS</b></p> <p><b>BASIC INFORMATION</b></p> <table border="1"> <tr> <td>Model</td> <td>A65M</td> </tr> <tr> <td>Operating System</td> <td>Android™ 13 Go</td> </tr> <tr> <td>CPU</td> <td>MT6739WW Quad-Core 4x ARM Cortex-A7 Mpcore up to 1.5GHz</td> </tr> <tr> <td>GPU</td> <td>PowerVR Ge8100</td> </tr> <tr> <td>RAM</td> <td>2GB</td> </tr> <tr> <td>ROM</td> <td>32GB</td> </tr> <tr> <td>Battery</td> <td>3800mAh</td> </tr> </table> <p><b>Display</b></p> <table border="1"> <tr> <td>Screen Size</td> <td>6.56"water drop Incell HD+ IPS</td> </tr> <tr> <td>Resolution</td> <td>720x1600 Pixels</td> </tr> <tr> <td>Touch</td> <td>Capacitive multi-touch</td> </tr> </table> <p><b>Cameras</b></p> <table border="1"> <tr> <td>Rear Camera</td> <td>5MP Camera</td> </tr> <tr> <td>Front Camera</td> <td>2MP Camera</td> </tr> </table> <p><b>Connection(I/O)</b></p> <table border="1"> <tr> <td>Band</td> <td>LTE-FDD: B2/4/5/12/13/17/41/66/71 LTE-TDD: B41/F(H/PPUE) WCDMA: B2/4/5 GSM: B2/3/5/8</td> </tr> <tr> <td>SIM/TF card</td> <td>2 Nano SIM Card Or 1 Nano SIM and 1 TF Card</td> </tr> <tr> <td>WiFi</td> <td>IEEE802.11 b/g/n/ac</td> </tr> <tr> <td>Bluetooth</td> <td>Bluetooth 4.2</td> </tr> <tr> <td>GNSS</td> <td>GPS, Beidou, Glonass, Galileo</td> </tr> <tr> <td>FM</td> <td>Yes</td> </tr> <tr> <td>Earphone Port</td> <td>3.5mm</td> </tr> <tr> <td>USB Port</td> <td>Type-C</td> </tr> </table> <p><b>Other Features</b></p> <table border="1"> <tr> <td>Video File Format</td> <td>3GP/ etc.</td> </tr> <tr> <td>Audio File Format</td> <td>WAV/MPEG/AAC/AMR, etc.</td> </tr> <tr> <td>Card Extend</td> <td>Support TF card up to 1TB</td> </tr> <tr> <td>Language</td> <td>Support Multi-language</td> </tr> <tr> <td>Sensor</td> <td>G-Sensor, P-Sensor, L-Sensor, Compass,</td> </tr> </table> <p><b>In the box</b></p> <ul style="list-style-type: none"> <li>1x Phone</li> <li>1x Screen Protector (pre-applied)</li> <li>1x Phone Case</li> <li>1x Type-C Cable</li> <li>1x Power Adapter</li> <li>1x Quick Start Guide</li> </ul> <p>Android is a trademark of Google LLC.</p> <p style="text-align: center;">5</p>	Model	A65M	Operating System	Android™ 13 Go	CPU	MT6739WW Quad-Core 4x ARM Cortex-A7 Mpcore up to 1.5GHz	GPU	PowerVR Ge8100	RAM	2GB	ROM	32GB	Battery	3800mAh	Screen Size	6.56"water drop Incell HD+ IPS	Resolution	720x1600 Pixels	Touch	Capacitive multi-touch	Rear Camera	5MP Camera	Front Camera	2MP Camera	Band	LTE-FDD: B2/4/5/12/13/17/41/66/71 LTE-TDD: B41/F(H/PPUE) WCDMA: B2/4/5 GSM: B2/3/5/8	SIM/TF card	2 Nano SIM Card Or 1 Nano SIM and 1 TF Card	WiFi	IEEE802.11 b/g/n/ac	Bluetooth	Bluetooth 4.2	GNSS	GPS, Beidou, Glonass, Galileo	FM	Yes	Earphone Port	3.5mm	USB Port	Type-C	Video File Format	3GP/ etc.	Audio File Format	WAV/MPEG/AAC/AMR, etc.	Card Extend	Support TF card up to 1TB	Language	Support Multi-language	Sensor	G-Sensor, P-Sensor, L-Sensor, Compass,	<p><b>FCC Warning</b></p> <p>15.19 Labeling requirements. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.</p> <p>15.21 Information to user. Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.</p> <p>15.105 Information to the user. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.</p> <p>These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:</p> <ul style="list-style-type: none"> <li>-Reorient or relocate the receiving antenna.</li> <li>-Increase the separation between the equipment and receiver.</li> <li>-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.</li> <li>-Consult the dealer or an experienced radio/TV technician for help.</li> </ul> <p style="text-align: center;">6</p>	<p><b>Absorption Rate (SAR) information:</b></p> <p>This device meets the government's requirements for exposure to radio waves. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons regardless of age or health.</p> <p><b>FCC RF Exposure Information and Statement</b></p> <p>The SAR limit of USA (FCC) is 1.6 W/kg averaged over one gram of tissue. This device was tested for typical body-worn operations with the back of the device kept 10mm from the body. To maintain compliance with FCC RF exposure requirements, use accessories that maintain an appropriate separation distance between the user's body and the back of the device.</p> <p>The use of belt clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that do not satisfy these requirements may not comply with FCC RF exposure requirements, and should be avoided. Use only the supplied or an approved antenna.</p>  <p style="text-align: center;">7</p>
Model	A65M																																																				
Operating System	Android™ 13 Go																																																				
CPU	MT6739WW Quad-Core 4x ARM Cortex-A7 Mpcore up to 1.5GHz																																																				
GPU	PowerVR Ge8100																																																				
RAM	2GB																																																				
ROM	32GB																																																				
Battery	3800mAh																																																				
Screen Size	6.56"water drop Incell HD+ IPS																																																				
Resolution	720x1600 Pixels																																																				
Touch	Capacitive multi-touch																																																				
Rear Camera	5MP Camera																																																				
Front Camera	2MP Camera																																																				
Band	LTE-FDD: B2/4/5/12/13/17/41/66/71 LTE-TDD: B41/F(H/PPUE) WCDMA: B2/4/5 GSM: B2/3/5/8																																																				
SIM/TF card	2 Nano SIM Card Or 1 Nano SIM and 1 TF Card																																																				
WiFi	IEEE802.11 b/g/n/ac																																																				
Bluetooth	Bluetooth 4.2																																																				
GNSS	GPS, Beidou, Glonass, Galileo																																																				
FM	Yes																																																				
Earphone Port	3.5mm																																																				
USB Port	Type-C																																																				
Video File Format	3GP/ etc.																																																				
Audio File Format	WAV/MPEG/AAC/AMR, etc.																																																				
Card Extend	Support TF card up to 1TB																																																				
Language	Support Multi-language																																																				
Sensor	G-Sensor, P-Sensor, L-Sensor, Compass,																																																				