# **7NB-RN User Manual**

#### Content

Declaration	1
Product Instruction	1
Insert SD Card	2
Insert USB Devices	2
Home Screen	2
System Bar	5
Applications	7
Language	8
Date & Time	. 10
Volume	11
Brightness	11
Scheduled Sleep On/Off	. 12
Wi-Fi	. 16
Ethernet	. 17
Bluetooth	. 19
Bluetooth Virtual Keyboard	
	. 21
Virtual Keyboard	. 21 . 22
Virtual Keyboard Switch Input Methods	. 21 . 22 . 22
Virtual Keyboard Switch Input Methods Surf Online	. 21 . 22 . 22 . 23
Virtual Keyboard Switch Input Methods Surf Online Browse Files	. 21 . 22 . 22 . 23 . 24
Virtual Keyboard Switch Input Methods Surf Online Browse Files Play Media Install & Uninstall Apps Install Apps	. 21 . 22 . 22 . 23 . 23 . 24 . 25 . 25
Virtual Keyboard Switch Input Methods Surf Online Browse Files Play Media Install & Uninstall Apps	. 21 . 22 . 22 . 23 . 24 . 25 . 25 . 28


### Declaration

- Please read the instructions carefully before equipment installation and using the device.
- ✓ Do not put the product in high temperature, humid or dusty environment.
- ✓ Do not drop, crash or break down this product.
- Do not power off the device when it's formatting or upgrading, otherwise it will cause operation system error.

Тор

- ✓ This product is not waterproof.
- ✓ Use only approved add-on enhancements.

#### **Product Instruction**

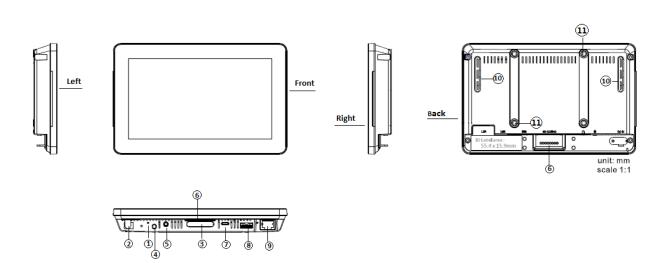

#### 1. LED Indicator:

Red	System is booting.
Green	System is working properly.
Light Off	Power supply is off.

2. DC In Jack: powered by 12V/2A DC input

3. SD Card Slot / Cover: support external SD card

- 4. Power Key: (1).Short press sleep and wake up(2).Long press to pop out the power off and reboot dialog box
- 5. Headset + Microphone Jack
- 6. Add-on module slot: to put optional add-on module
- 7. Micro-USB Port: support USB 2.0 high speed 480Mbps
- 8. USB Port: support USB 2.0 high speed 480Mbps
- 9. Ethernet RJ45 Port: support Ethernet connection (10/100Mbps LAN)
- 10. Speaker: audio output
- 11. VESA Mount Holes: for installing the bracket
- 12. WIFI: 802.11b/g/n/ac 2.4G/5G
- **13. Temperature:** Operation: 0°C ~ 40°C (32F ~104F)

Storage: -10°C ~ 55°C (14°F ~ 131°F)

### **Insert SD Card**

This product supports external SD card. Please insert your SD card into the SD Card Slot (**#3** in **Product Instruction**) on the top of this product.

## **Insert USB Devices**

This product supports USB and Micro-USB to deal with your files.

#### USB

Plug your USB memory into the USB port (**#8** in **Product Instruction**) on the bottom of this product, and then you can do the file operations via the File Browser. (See the details in **Browse Files**).

#### Micro-USB

Connect the Micro-USB port (**#7** in **Product Instruction**) on the bottom of this product and the USB port on your computer with a Micro-USB-to-USB cable.

In the "USB Debug Connection" window that automatically pops up, click the "USB Preferences" button and select "File Transfer" to make the device visible on your computer.

## Home Screen

In the home screen, you can long-press the blank space to change the

wallpaper or drag widgets to desktop.

- •					17:11
	Q Google				
	_				
	Contacts				
		a.		*	
		WALLPAPERS	WIDGETS	HOME SETTINGS	
С	Q	Þ		0	D

#### Change Wallpaper:

1. Click "Wallpapers".

🗸 Set wallpaper				
My photos				
ڻ ٺ	Φ	⊲	0	٩

2. Select an image from the Myphotos preset.




3. Click "Set wallpaper" on the upper-left corner of the screen to apply the wallpaper.

#### Add Widgets:


1. Click "Widgets".



2. Long-press a widget and drag it to desktop.

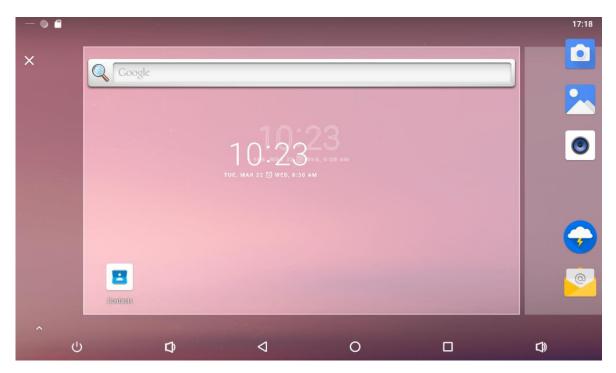

3. If you want to remove an icon, long press the widget and drag it to the top left corner of the screen, "x ".

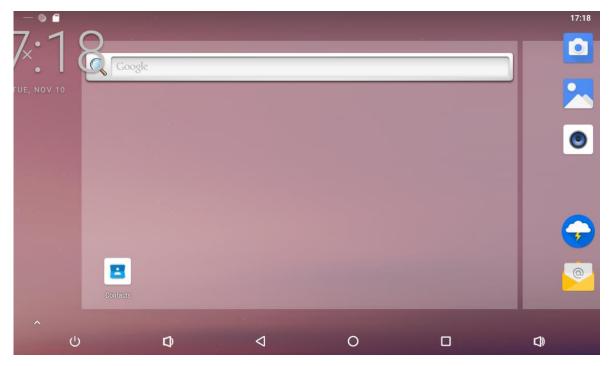

### System Bar

**Navigation Buttons** 

0	7		0	ŕ	
( <sup>1</sup> )	<b>[</b> ]	<	0	CD)	

**1.Power:** Power off and restart.

- **2. Volume-:** Decrease the system volume.
- **3. Back:** Return to the previous page.
- 4. Home: Return to the home screen.
- 5. Recents: Switch between recently used apps.

- 🖬 🖞 🔍				💎 17:35
	Explorer		×	
	👚 Home	💽 LevelUp	E I	
	Settings		×	
	On			
	Connected	OP-AP		
	= Calculator		×	
ڻ	<b>D D</b>			D)

To remove an application from the list, swipe left or right to remove the list.

		Explored			Name V X
		👚 Ho	ome	LevelUp	E I
\$	Settings		×		
•	Network & Internet Wi-Fi, data usage, hotspot				
[ <sub>0</sub> 0	Connected devices Bluetooth, Cast, NFC				
:::	Apps & notifications Permissions, default apps	+ Calculat	tor		×
	Disalau				
	Ģ	Ø	$\triangleleft$	0	

6. Volume+: Increase the system volume.

#### **Status Notifications**

— 🗂 받 🔘

Status bar at top of the screen displays system status, such as time, Wi-Fi, SD card and USB connection etc.

17:31

Pull down from the top to open the status window.

Includes brightness adjustment, Wi-Fi, automatic rotation, flight mode and position switching, system setting entry.

					17:39		
Q Go	ogle	a <del>.</del>		Ô	_		D
		•	*	8			
		ZUNIDATA-SZ-TOP-	Bluetooth 👻	Do not distur	rb 🕶		
		•		_			۲
		$\Diamond$	*	2			
		Auto-rotate	Airplane mode	Cast			
		Tue, Nov 10		/ 0	^		
		NFC Reader Module P	NFC20(CT-NFC-C32	5-01) Demo			
		PNFC GetTagServiceis runnin	a				
Contact		0 <b>·</b>	5				
~							
ڻ ا	Ø	4		0		d)	


## Applications

Slide the page up at the bottom of home screen to enter the applications page.

		175			2	
Apkinstaller	Calculator	Calendar	Camera	Clock	Contacts	
0	\$			$\bigcirc$	۲	
Email	Explorer	Files	Gallery	Lightning	Music	
205	Q	<b>1</b>	٩			
Schedule settings	Search	Settings	Sound Recorder	Video	WebView	


The installed applications will be shown here and you can open an app by clicking its icon.

To find an app easily, you can create a shortcut by long-pressing of the icon and drag it to the home screen.

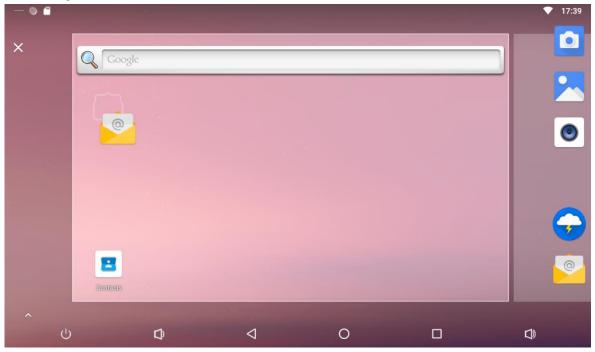

#### Language

In the App list, click "Settings" to open the system setting app, and select the option "System"  $\rightarrow$  "Language & input".

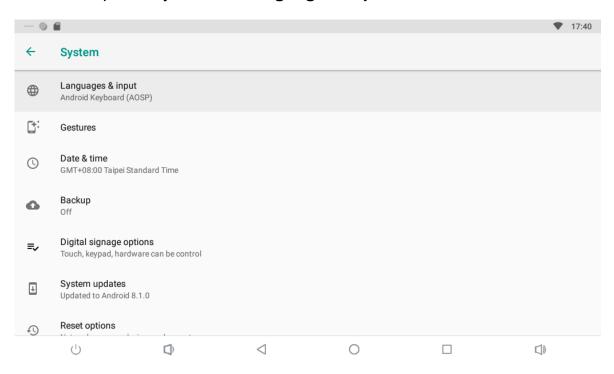

Click the first option "**Language**" under "**Language & input**", and then you can change the system language according to your preference.

$ \bigcirc$					♥ 17:40
÷	Languages & inpu	it			
Ŕ	Languages English (United States)				
	Keyboard & inputs				
	Virtual keyboard Android Keyboard (AOSP	)			
	Physical keyboard Not connected				
~	Advanced Input assistance				
	Ċ	Þ	$\triangleleft$	0	<b>(</b> )


#### Date & Time

In the App list, click "**Settings**" to open the system setting app, and select the option "**Date & time**".

$ \bigcirc$					♥ 17:41
←	Date & time				
	Automatic date & tir Use network-provided				۰
	NTP Server time.android.com				
	Set date November 10, 2020				
	Set time 17:41				
	Select time zone GMT+08:00 Taipei Star	ndard Time			
	Use 24-hour format				۲
	Ċ	D)	$\triangleleft$	0	

If you enabled the option "Automatic date & time" under "Date & time", system date and time will be synchronized automatically with network time when you connected a Wi-Fi network.

If you want to set the time manually, you need to disable "Automatic date & time".

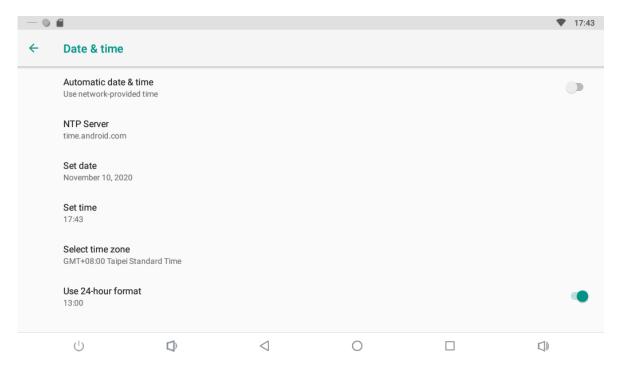

In this option, you can also set time zone, time notation and date format.

### Volume


On the system bar, click the **Volume-** icon to decrease the system volume, and click the **Volume+** icon to increase the system volume

### **Brightness**

Pull down the screen to open the shortcuts window, and then click "Brightness".

				17:43		
	Q			<b>_</b>		
		♥,	*	8		
		ZUNIDATA-SZ-TOP- AP	Bluetooth 👻	Do not disturb 👻		
						0
		Ø	*	2		
		Auto-rotate	Airplane mode	Cast		
*) (s						~
		Tue, Nov 10		/ \$ ^		<b>9</b>
		— NFC Reader Module     PNFC     GetTagServiceis runni		:5-01) Demo		
	1	0				
~		¢	Þ	4	0	D)

Slide the brightness button to adjust the brightness of the screen, or turn on Auto switch to automatically adjust the display's brightness to the appropriate level for the current ambient light.



## Scheduled Sleep On/Off

This function is used to power the device on and off automatically at the set time.

In the App list, click "**Settings**" to open the system setting app, and select the option "Digital signage options"  $\rightarrow$  "**Schedule**".

- •					* 🛡	17:16
÷	Digital signage opt	tions				
	Enable keypad function	ı				
	Enable touch panel fun	ction				
	Enable touch wakeup					
	Schedule					
	Ċ	D)	$\triangleleft$	0		

#### Click the single option "Set Scheduled sleep On/Off Clocks".

				* 🕈 17:17
Schedule settings				
Shut Down				
Re boot 00:00				
Sleep 00:00				
Sleep OFF 00:00				
Ċ	Û	$\bigtriangledown$	0	

Sleep ON: Enter sleep.

Sleep OFF: Wake up.

Click "Set Sleep ON Clock".

- •						* 💎 17:17
← Se	t SLEEP ON Cloc	k			REVERT	DONE
<b>Time</b> 00:00						
Repeat Never						
Ċ	)	Ď	$\triangleleft$	0		

Click the option "**Time**" to set the sleep on time of this device.

			* 💎 17:17
← Set SLEEP ON Clock			REVERT DONE
<b>Time</b> 00:00			
Repeat Never	21:30	55 00 05 50 10 45 15 40 20 35 30 25 E CANCEL OK	
U D	$\triangleleft$	0	

Click the option "**Repeat**" to select the days which will sleep on this device at the set time.

- • •								* 🕈 17:17
← Se		ock						
Time		Rep	eat					
21:30			Monday					
Repeat Never			Tuesday					
			Wednesday					
			Thursday					
			Friday					
			Saturday					
			Sunday					
						CANCEL	ок	
Ċ	)	Û		$\bigtriangledown$	0			

After setting, click "**Done**" at the upper-right corner of the screen to save them.

— 🌢					* 💎 17:18
← Set SLEEP ON Clo	ock			REVERT	DONE
<b>Time</b> 21:30					
Repeat Mon, Tue, Wed, Thu, Fri					
$\bigcirc$	$\Box$	$\triangleleft$	0		

You will see the Sleep on option checked after saving the settings.

- •					* ♥	17:18
Schedu	lle settings					
Shut Down	00:00					
Re boot	00:00					
Sleep ON	<b>21:30</b> Mon, Tue, Wed, Thu, Fri					
Sleep OFF	00:00					
	() I	D	$\triangleleft$	0		


For sleep on clocks, you can set them as same as sleep off clocks.

- •					 * 🕈 17:	:18
Schedu	le settings					
Shut Down	00:00				C	ב
Re boot	00:00					ב
Sleep ON	<b>21:30</b> Mon, Tue, Wed, Thu, Fri					2
Sleep OFF	<b>08:00</b> Mon, Tue, Wed, Thu, Fri					2
	Ċ	$\widehat{\Box}$	$\triangleleft$	0		

After the settings, the device will be powered off at set time, and powered on again when achieves the appointed time.

#### Wi-Fi

In the App list, click "**Settings**" to open the system setting app, and select the option "**Wi-Fi**".

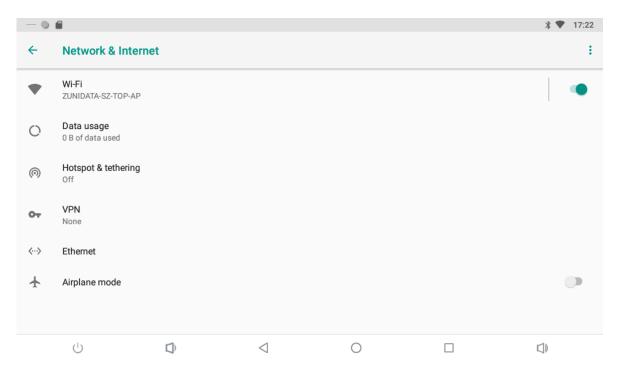

Switch the Wi-Fi button to **ON**. The product will scan available wireless networks automatically. Select a network under Wi-Fi networks and input the password to connect.

$ \bigcirc$					* 🛡	17:22
÷	Wi-Fi					
	On					•
•	ZUNIDATA-SZ-TOP-AF Connected	2				â
•	ChinaNet-cdsk					â
•	e-timer-80c3bc					۵
•	elecom2g-80c3bc					Ô
•	elecom5g					
Ŧ	ChinaNet-WD8XVH					
	Ċ	¢	$\triangleleft$	0		0

#### Ethernet

In the App list, click "**Settings**" to open the "Network & internet", select

"Ethernet".

$ \bigcirc$					∦ ↔> 17:27
←	Network & Interne	et			:
•	<b>Wi-Fi</b> Off				
0	Data usage 0 B of data used				
0	Hotspot & tethering Off				
07	VPN None				
<···>	Ethernet				
*	Airplane mode				0
	Ċ	D)	$\triangleleft$	0	

Check "Use Ethernet" and plug the Internet cable into the Ethernet port (**#9** in **Product Instruction**). If Wi-Fi is on, please turn off Wi-Fi to allow Ethernet working.

$ \bigcirc$				∦ ↔ծ 17:27
←	Ethernet			
	IP address 192.168.1.104			
	netmask 255.255.255.0			
	gateway 192.168.1.253			
	<b>dns1</b> 192.168.1.253			
	<b>dns2</b> 0.0.0.0			
	Ethernet Ip mode			
	Ċ	$\triangleleft$	0	

If you are Static IP user, please set the configurations manually.

### Bluetooth

In the App list, click "Settings" to open the system setting app; Select the "Connection devices" option.

- 0 🖬 \$ 17:28 ← **Connected devices** Bluetooth \* Not connected Cast 2 Not connected NFC ß Allow data exchange when the tablet touches another device Android Beam 1Ê1 Ready to transmit app content via NFC Printing ē 1 print service on USB ψ Transferring files  $\bigcirc$  $\triangleleft$ Ο 囗))

Switch the Bluetooth button to ON. Click "Pair new device" to view the product automatically scan around the available Bluetooth devices.

If you want to pair another Bluetooth device, select it from the "Available Devices" list, and then click "Pair" in the pop-up window. At the same time, click "Pair" in the pop-up window of the Bluetooth device to be paired.

- •	6							*	17:30
÷	Pair new device								
	Visible as "7NB-RN" to other devices								
	Available devices								
e.	rachel123 Pairing	Pair with rache							
Ľ	Jason	537028	2						
	DC1	✓ Allow access to y	rour contacts and call histo	ory	CANOFI	DAID			
i	Tablet's Bluetooth address:	VV/VV/12/22/07/71	_	-	CANCEL	PAIR			
	ڻ ا	Þ	$\triangleleft$	0			¢		

After pairing, the paired devices are displayed in the "paired devices" list.

$ \bigcirc$					*	17:31
÷	Bluetooth					
	On					
	Visible as "7NB-RN" to oth	er devices				
	Paired devices					
ς.	rachel123					\$
+	Pair new device					
	Device name 7NB-RN Received files					
i	Tablet's Bluetooth address	s: 00:0C:12:22:33:91				
	Ċ	$\Box$	$\triangleleft$	0		

Click "Device name" to rename.

- •	·						*	17:32
÷	Bluetooth							
	On							
	Visible as "7NB-RN" to other devices							
	Paired devices	Rename this de	vice					
r.	rachel123	7NB-RN						\$
+	Pair new device			CANCEL	RENAME			
	Device name 7NB-RN							
	Received files							
i	Tablet's Bluetooth address:	00:0C:12:22:33:91						
	ڻ ٺ	¢	$\triangleleft$	0		D)		

### **Virtual Keyboard**

The device provides a virtual keyboard for typing. You can use it as a real one.

When you click in a text input box, the virtual keyboard will appear at the bottom of the screen.

To collapse the virtual keyboard, you can click the icon  $\blacksquare$  in the system bar.

— 🌒 🖀									* `	17:32
1 Sea	rch								$\times$ $\leftarrow$	→ :
			(	<b>30</b>	<u>oç</u>	gle	Search			
q	2 W	e	r	t	у 6	u <sup>7</sup>	i	9 O	p	×
а	S	d	f	g	h	j	k	Ι		<b>&gt;</b>
<b></b>	Z	х	С	۷	b	n	m	!	?	<u>+</u>
?123	/									.com
(	じ	Û		$\bigtriangledown$		0				

## **Switch Input Methods**

Please check whether the installed input method is selected in the "Language & input" option under the system setting app.

- 🖬 (	0				* 🛡	10:47
÷	Virtual keyboard					
	Android Keyboard (AOS English (US)	SP)				
+	Manage keyboards					
	Ċ	D	$\triangleleft$	0	$\square$	

## **Surf Online**

In the App list, open "Browser" 😔.

When connecting the device to a network, you can visit websites, play online media or download files via the browser.

In a browser window, enter in a URL in the address bar and click "-->" in the

virtual keyboard to go. You can also click it to add new tabs to make multiple tabs opened simultaneously.



#### **Browse Files**

	t, open " <b>Expl</b>	orer" 🐱	to view loca	al files.	
— 🖬 • SD Card					∦ ♥ 10:51
🔒 Home	🛃 Level	Jp 🖻	Multi	C Editor	HewFolder
1				2020-	11-11 17:32:48   drw
2				2020-	11-12 10:50:17   drw_
Android	1			2020-	10-16 17:53:12   drw
LOST.D	IR			2020-	09-23 08:53:34   drw
Screens	shots			2020-	09-23 09:16:14   drw
	onfig.json				10.00.15:07:16   m
Ċ	Ô	$\Diamond$	0		D)

Long-press a file or folder to do file operations, such as copy, delete, move (cut), paste, rename, send (share) and create shortcut.

— 🖬 🔍					∦ ▼ 10:52
SD Card					
🔒 Home	💽 LevelUp	- E= Multi-	[2] E	ditor	RewFolder
1		Сору			
		Delete		2020-1	11-11 17:32:48   drw
2		Move			
		Paste		2020-1	11-12 10:51:42   drw
Android		Rename			10-16 17:53:12   drw
		Send			
LOST.DIR		Create shotcut		2020-(	09-23 08:53:34   drw
Screenshots	S	shotcut			
				2020-0	09-23 09:16:14   drw
DDR_config.	.json			20 P I 2020	10 20 1E:07:16 L pu
Ċ	Ð	$\Diamond$	0		$\Box$

If you want to select several files/folders at once, click "Multi" in the menu, and then select files/folders. The selected files/folders will be highlighted in blue.

🛖 Home	🛃 LevelUp	🕒 Multi	🗹 Editor	H NewFold
The NFCReader	Demo.apk		1.51 M   2020	-09-10 10:30:50   -rw
🐞 rootexplore	r_v4.9.6.apk		4.38 M   2020	-10-26 16:29:54   -rw
V testitem.xm	l		735 B   2020	-10-29 16:02:44   -rw
wifi2.4G_co	nfig.json		49 B   2020	-10-20 15:06:28   -rw
wifi5G_conf	îg.json		40 B   2020	-10-23 17:47:48   -rw
WiFiSignalT	est txt			

Click "Editor" in the menu to operate the selected files/folders.

### **Play Media**

With the provided apps, you can play your media files on your storage, such as pictures, music and videos.



**Picture Player:** 

Support JPG, BMP, GIF, JPEG, PNG.



**Music Player:** 

Support MP1, MP2, WMA, WAV, AAC, OGG, APE, FLAC.



Video Player: Support MKV, TS, FLV, AVI, VOB, MPG, DAT, ASF, RM, MOV, 3GP, MP4, WMV.

## **Install & Uninstall Apps**

#### **Install Apps**

Before installing an app, please download the app (.apk) to via the browser, or copy a downloaded app to the device from your computer.

Then you can open "ApkInstaller" 😇 in the App list to install the downloaded app.

— 🗂 🕒 \* 💎 10:54 ApkInstaller Install Manage Exit Ċ Ð  $\triangleleft$ 0 **D** 

Click "Install" button.


Choose the installation file's location.

— "	•					* 🕈 10:54
Insta	II					
Path:	/					
	Internal Memory				There is no apk file under this directory	
	TF Card					
	Ċ	đ	$\Diamond$	0		

The apk files will be automatically scanned in the right side list.

— 🖬 🕒				∦ 🛡 10:54
Install				
Path: TF Card/storage/331D-5126				
/			Directory: TF Card/storage/331D-	5126
· · ·			NFC Reader M PNFC20(CT-N)	odule FC-C325-01) Demo
2			😽 NFCReaderDe	mo.apk
<b>1</b>			NFC Reader M PNFC20(CT-N	odule FC-C325-01) Demo
Android			FactoryTest_R lease.apk	N7N_8.1_v1.1.2_re
Screenshots			FactoryTest_R lease.apk	N7N_8.1_v1.1.3_re
LOST.DIR			👸 rootexplorer_v	4.9.6.apk
<b>ل</b> ل	$\Diamond$	0		D)

Click the apk you want to install.

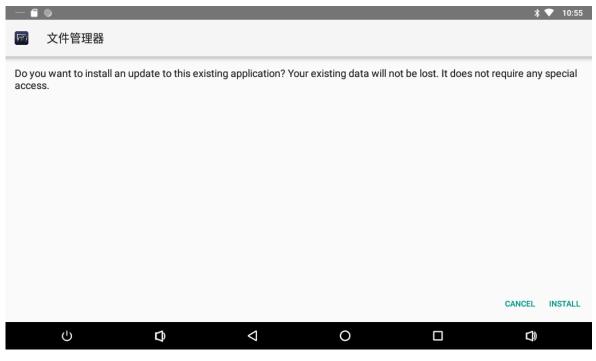


Click "Install" and then waiting for installation finished.


	•				* 🔻	10:55
F	文件管理器					
			$\checkmark$			
			App installed.			
					DONE	OPEN
	Ċ	Þ	$\triangleleft$	0	<b>D</b>	

You can also download an android app market, and install the apps via the market.

If you encounter the following prompts, select "Setting" to enter " Install unknown apps" page".

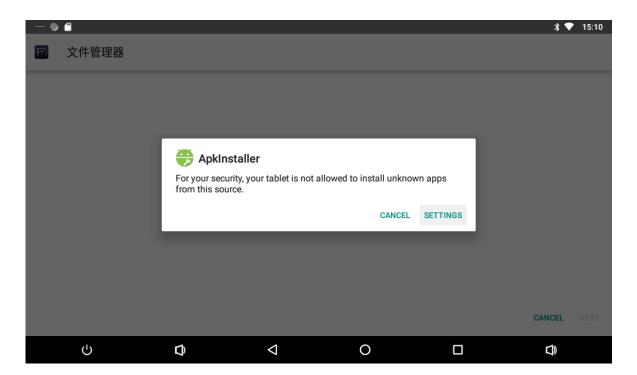

Turn on "Allow from this source" button, click the back icon to continue to install app.

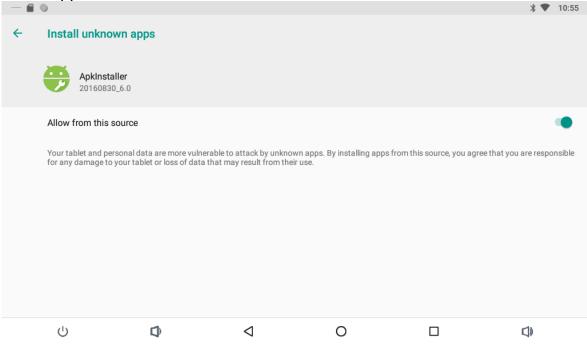

#### **Uninstall Apps**

To uninstall the app, go to the "Settings"-> "App&Notifications" list. In this option, you will see a list of installed applications.

- 🖬 🔍					* 🕈	10:56
← /	App info					:
	00.20 KD					
	Search 32.26 kB					
	Settings 88.58 kB					
	Sound Recorder 28.67 kB					
	<b>Video</b> 332 kB					
	WebView Shell 28.67 kB					
	<b>文件管理器</b> 12.89 MB					
	Ċ	Ø	$\triangleleft$	0	<b>(</b> )	

Click the app you want to remove to enter the detail page.

11.2				1 0	
					* 🕈 10:56
← App info					
文件管理器 Installed	Ş				
	UNINSTALL			FORCE STOP	
App notifications					
Permissions No permissions grant	ted				
Storage 12.89 MB used in inte	ernal storage				
Data usage No data used					
Battery					
Ċ	Q	$\triangleleft$	0		<b>(</b> )


Click the "**Uninstall**" button and select "OK", and then waiting for uninstallation finished.

- 🖻	0						* 🕈	10:56
÷	App info							
	文件管理器 Installed							
	UNI	🕞 文件管理器				тор		
	App notifications	Do you want to unin						
	Permissions No permissions granted				CANCEL C	ж		
	Storage 12.89 MB used in internal st	orage						
	Data usage No data used							
	Battery	Ø	⊲	0			1)	

#### **Reset to Factory Default**

Please make sure to back up the important data before resetting the device.

In the App list, click "**Settings**" to open the system setting app, and select the option "**Reset options**".

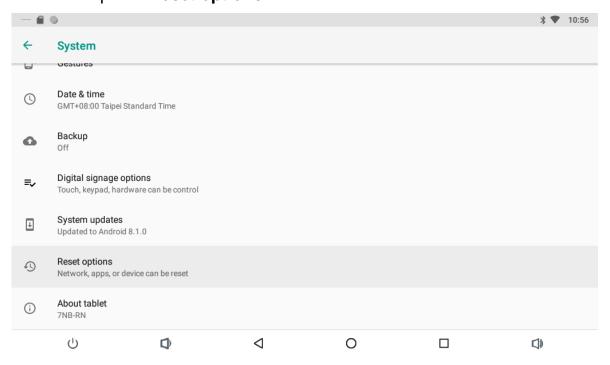

Select the option "Erase all data(factory reset)".

—	•				* 🛡	10:57
÷	Reset options					
	Reset Wi-Fi, mobile &	Bluetooth				
	Reset app preferences	S				
	Erase all data (factory	/ reset)				
	Ċ	D)	$\triangleleft$	0	<b>(</b> )	
Click	"RESET TA	BLET".				
- 6	0				* 🛡	10:57
<i>←</i>	Erase all data (fa	ctory reset)				
This wi	ill erase all data from	your tablet's internal	storage, including:			
<ul> <li>Syste</li> <li>Down</li> <li>Musi</li> <li>Phote</li> </ul>		settings				
			RESET TABLE	Т		
	С U	Ø	$\triangleleft$	0		

Click "Erase everything" button, and then waiting system reboots and resets to factory default.

- 🖬 🔍					* 💎 10:57			
← Reset?								
			0.1/					
Erase all your personal information and downloaded apps? You can't undo this action!								
		EDASE EV	ERYTHING					
		ERASE EV						
Ċ	¢	$\triangleleft$	0		口)			

#### Federal Communications Commission (FCC) Statement

You are cautioned that changes or modifications not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-Reorient or relocate the receiving antenna.

-Increase the separation between the equipment and receiver.

-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-Consult the dealer or an experienced radio/TV technician for help.

For product available in the USA/Canada market, only channel 1~11 can be operated. Selection of other channels is not possible.

Operations in the 5.15-5.25GHz band are restricted to indoor usage only. This device meets all the other requirements specified in Part 15E, Section 15.407 of the FCC Rules.

# This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1) this device may not cause harmful interference, and

2) this device must accept any interference received, including interference that may cause undesired operation of the device.

#### FCC RF Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.