
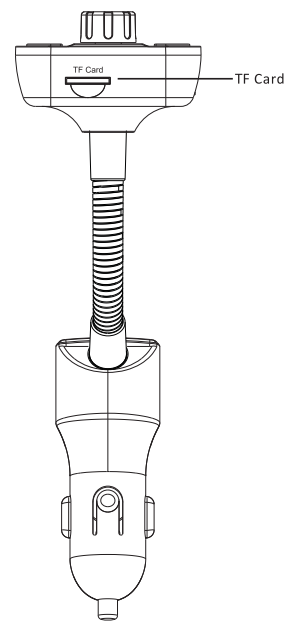

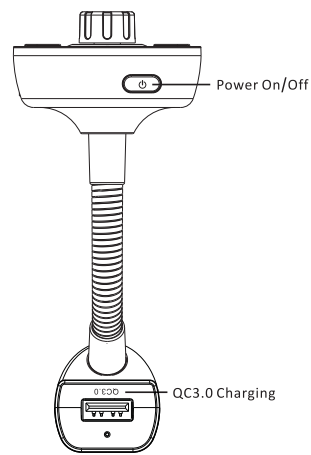
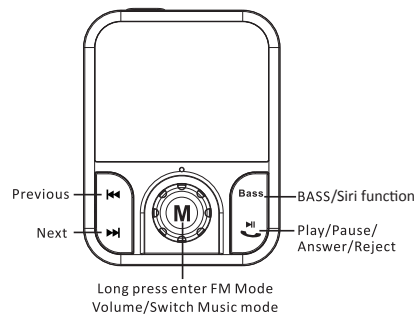


Bluetooth FM Transmitter
QC3.0&5V/2.4A CAR CHARGER

HK302
English

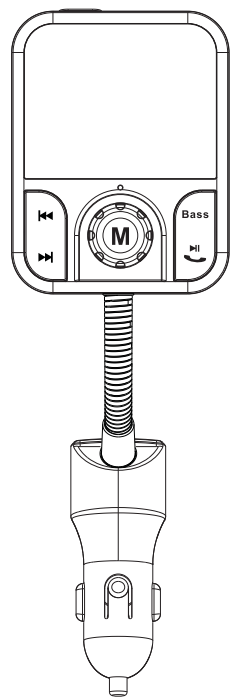

Product Production

This device is a car Bluetooth MP3 player, which equipped with professional high performance Bluetooth module and MP3 decoder chip. It can transmit your mobile phones music and TF Card music to car stereo via FM radio signal. It can also be used as a hands free car kit during driving. This devices transmits signal by wireless method, no need to modify anything in car. It can be used both as the music player for entertainment purpose or hands free car kit in safety purpose during driving.

Product Features

- 1.Support Bluetooth hands free MIC call,so that people answer the phone safety.
- 2.Noise and wind suppressed by CVC technology to create full duplex sound quality.
- 3.Support mobiles A2DP function. Music will be played directly while the device is connected with mobile phone.
- 4.Mobile phone can be reconnected automatically.
- 5.Support an external TF cad, can play music files in MP3/WMA/WAV format.
- 6.Integrated car charger of output QC3.0 and 5V/2.4A, it is available for charging hand-held devices in car.

Operation Instructions

- 1.Device Power on
(1).Device turns on automatically when plug its integrated car charger to car cigarette lighter power.
(2).Select a frequency.
(3).Turn on car FM stereo and keep the frequency same with the device.
- 2.Frequency and Volume Adjustment.
(1).This device supports 206 transmission frequency point:87.5~108.0MHZ, long press **M**bottom into the Frequency setting mode, then rotate to adjust FM transmission frequency.
(2).Rotate **M** to adjust the volume
- 3.Playing Music from TF card.
(1).Insert the TF card into the device, it will automatically detect and play the MP3/WMA/WAV format music in the TF card.
(2).Music selection: short press **⏮** or **⏭** to select songs.
- 4.Connect to Bluetooth Devices
(1).This devices is equipped with built in Bluetooth chip , it can connect to any other hand-held Bluetooth devices.
(2).It will enter pairing mode automatically when the devices is powered on . Search this devices with name of "HK302", and connect it.
(3).Memory function. It will connect to its memorized paired Bluetooth device automatically once the unit is powered on.
- 5.Automatic reconnect function

When the unit is power, the phone beyond the Bluetooth reception range, or leave the unit for some time (more than 3 minutes). Then the phone back to the product's Bluetooth reception range, this time, click any key of the unit, then the phone can be connected automatically. Don't need to power off and reconnect the unit and the mobile phone.

6.Playing Music from Mobile Phone
(1).After connecting mobile phone to the device successfully via Bluetooth, you can play music from mobile phone the device will wirelessly transmit the signal to car stereo.
(2).You can adjust the music Volume/Play/Pause/Previous/Nest on mobile phone, or on the device.

7.Switching Music File Sources
It can play the music from TF card and device with Bluetooth function, switch the file source between TF card and devices with Bluetooth by short press **M**.

8.Make A Call
(1).You can make a call and answer the phone through this device after connected by Bluetooth. Double tap **M** redial the last phone number.
(2).Reject call: when a call coming, double press **M** to reject a call.

9.Aux Out
The unit support music sources output from TF card music or Phone's Bluetooth music, And the music output to the other device by aux out port.

10.Part Description

Operation Instruction
1.Power On/Off Short press ⏻ to on Again short press ⏻ to off
2.How to pair mobile? Plug the device into the cigarette lighter, then turn on the phone Bluetooth, find the HK302 pairing name, click to pair
3.How to play and pause? Short press ⏮ to play Press again ⏮ to pause
4.How to adjust volume? Adjust the volume by rotate M
5.How to select music? Press ⏭ to play next song Press ⏮ to play previous song
6.How to answer and end a call? Short press M to answer an incoming call Short press M to end the call Double press M to refuse incoming call Double press M to redial the last phone No.
7.Switching mode Shot press M , then it will switch between TF card and Bluetooth mode.
8.Siri function Long press the " Bass " button, the product wakes up the Siri voice assistant function

Bluetooth
Bluetooth Version: V5.0
Frequency Range: 20HZ~20KHZ
USB Port Voltage: 5V±0.5
Frequency: 2.402~2.480 GHZ
Effective Range: 10 meters (free space)

Frequencies
FM: 88.1~107.9MHZ

Note
This devices is compatible with most of the mobile phones, except a few mobile phone that are not available to use parts of above functions. Product features be upgraded without any notice.

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:
(1) This device may not cause interference.
(2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

(1) L' appareil ne doit pas produire de brouillage;
(2) L' appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d' en compromettre le fonctionnement.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.