

Report No.: FYCR220600021901 Page: 1 of 28

# TEST REPORT

Application No.:	FYCR2206000219AT			
Applicant:	Very Great, Inc DBA Courant			
Address of Applicant:	228 Park Ave South PMB 53363 New York 10003 United States			
Manufacturer:	Very Great, Inc DBA Courant			
Address of Manufacturer:	228 Park Ave South PMB 53363 New York 10003 United States			
Equipment Under Test (EUT	):			
EUT Name:	MAG:1 CLASSICS			
Model No.:	CR-MAG1-BK-BK, CR-MAG1-GR-GR, CR-MAG1-WH-SL			
	CR-MAG1-BR-ORB, CR-MAG1-TN-PG 🛛 🐥			
*	Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.			
Trade Mark:	Courant			
FCC ID:	2ARIH-MAG1			
Standard(s) :	47 CFR Part 15, Subpart C			
Date of Receipt:	2022-06-09			
Date of Test:	2022-06-13 to 2022-06-17			
Date of Issue:	2022-06-28			
Test Result:	Pass*			

\* In the configuration tested, the EUT complied with the standards specified above.

WinkeyWang

Winkey Wang EMC Technical Manager



ical Manager Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ggs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ggs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@sgs.com

Fuyong lab. Xinlong Technic Park, Fengtang Road, Fuyong Subdistrid, Bao'an, Shenzhen, China 518103 tt (86–755) 88663988 ft (86–755) 26710594 www.sgsgroup.com.cn 中国・深圳・宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 tt (86–755) 88663988 ft (86–755) 26710594 sgs.china@sgs.com



Report No.: FYCR220600021901 Page: 2 of 28

	Revision Record					
Version	Chapter	Date	Modifier	Remark		
01		2022-06-28		Original		

Authorized for issue by:		
	Gree Zhan	
	Tree Zhan/Project Engineer	
	WinkeyWarg	
	Winkey Wang/Reviewer	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Countert, aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document cannot be reproduced except in full, without prior written approval of the Company hav, unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) testing and such asphe)(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or eventile (30 Decendent Samples) and the same first and such aspheres and for 30 days only.

Flyrogiab.Xinong TechnoPark, Fenglang Road, Fuyng Subdistict, Bao'an, Shenzhen, China 518103 tt (86-755) 88663988 ft (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 tt (86-755) 88663988 ft (86-755) 26710594 sgs.china@sgs.com



Report No.: FYCR220600021901 Page: 3 of 28

### 2 Test Summary

Radio Spectrum Technical Requirement					
Item	Standard	Method	Requirement	Result	
Antenna Requirement	47 CFR Part 15, Subpart C	N/A	47 CFR Part 15, Subpart C 15.203	Pass	

Radio Spectrum Matter Part					
Item	Standard	Method	Requirement	Result	
Conducted Emissions at AC Mains Power Port (150kHz-30MHz)		ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass	
Radiated Emissions (30MHz-1GHz)		ANSI C63.10 (2013) Section 6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass	
Radiated Emissions (9kHz-30MHz)	47 CFR Part 15, Subpart C	ANSI C63.10 (2013) Section 6.4	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass	
20dB Bandwidth		ANSI C63.10 (2013) Section 6.9.2	47 CFR Part 15, Subpart C 15.215	Pass	
Restricted Bands		ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205	Pass	

### **Declaration of EUT Family Grouping:**

Model No.: CR-MAG1-BK-BK, CR-MAG1-GR-GR, CR-MAG1-WH-SL, CR-MAG1-BR-ORB,

#### CR-MAG1-TN-PG

Only the model CR-MAG1-BK-BK was tested, since according to the declaration from the applicant, the electrical circuit design, PCB layout, components used and internal wiring and functions were identical for the above models, with only difference on shape and color of the shell.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Countert, aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document cannot be reproduced except in full, without prior written approval of the Company hav, unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) testing and such aspne)(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or eventil's Docebeck to a such aspne).

Fuyong lab. Xinlong TechnoPark, Fengtang Road, Fuyong Subdistict, Bao'an, Shenzhen, China 518103 t (86–755) 88663988 f (86–755) 26710594 www.sgsgroup.com.cn 中国·深圳·宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 t (86–755) 88663988 f (86–755) 26710594 sgs.china@sgs.com



Report No.: FYCR220600021901 Page: 4 of 28

## 3 Contents

		Page
1	COVER PAGE	1
2	TEST SUMMARY	3
3	CONTENTS	4
4	GENERAL INFORMATION	c
4		
	4.1 DETAILS OF E.U.T.	
	<ul> <li>4.2 DESCRIPTION OF SUPPORT UNITS</li> <li>4.3 MEASUREMENT UNCERTAINTY</li> </ul>	
	4.3 MEASUREMENT ONCERTAINTY	
	4.5 TEST FACILITY	
	4.6 Deviation from Standards	
	4.7 ABNORMALITIES FROM STANDARD CONDITIONS	7
5	EQUIPMENT LIST	8
6	RADIO SPECTRUM TECHNICAL REQUIREMENT	11
Ŭ		
	6.1 ANTENNA REQUIREMENT	
47	· · · · · · · · · · · · · · · · · · ·	
	6.1.2 Conclusion	11
7	RADIO SPECTRUM MATTER TEST RESULTS	12
	7.1 CONDUCTED EMISSIONS AT AC MAINS POWER PORT (150KHz-30MHz)	12
	7.1.1 E.U.T. Operation	12
	7.1.2 Test Mode Description	
	7.1.3 Test Setup Diagram	
	<ul> <li>7.1.4 Measurement Procedure and Data</li> <li>7.2 RADIATED EMISSIONS (30MHz-1GHz)</li> </ul>	
	7.2 RADIATED EMISSIONS (SUMIA2-TOTIZ)	
	7.2.2 Test Mode Description	
	7.2.3 Test Setup Diagram	
	7.2.4 Measurement Procedure and Data	
	7.3 RADIATED EMISSIONS (9KHz-30MHz)	
	7.3.1 E.U.T. Operation	
	<ul><li>7.3.2 Test Mode Description</li><li>7.3.3 Test Setup Diagram</li></ul>	
	7.3.4 Measurement Procedure and Data	
	7.4 20DB BANDWIDTH	
	7.4.1 E.U.T. Operation	
	7.4.2 Test Mode Description	
	7.4.3 Test Setup Diagram	
	7.4.4 Measurement Procedure and Data	
	7.5 RESTRICTED BANDS	26



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Countert, aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document cannot be reproduced except in full, without prior written approval of the Company hav, unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) testing and such asphel(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ss.com

Tyong ib. Xinong Technologa Road, Fuyong Subdishid, Barlan, Shenzien, China 518103 tt (86–755) 88663988 ft (86–755) 26710594 www.sgsgroup.com.cn 中国・深圳・宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 tt (86–755) 88663988 ft (86–755) 26710594 sgs.china@sgs.com



Report No.: FYCR220600021901 Page: 5 of 28

9	EUT C	ONSTRUCTIONAL DETAILS (EUT PHOTOS)	28
8	TEST	SETUP PHOTO	28
	7.5.4	Measurement Procedure and Data	26
	7.5.3	Test Setup Diagram	
	7.5.2	Test Mode Description	
	7.5.1	E.U.T. Operation	26



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditions, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) lested and such sample(s) are relained for 30 days only. or email: CN Doccheck@ses.com or email: CN Doccheck@ses.com compont accessing the sample(s) lested and such sample(s) areas contact us at telephone: (86-755) 8307 1443.

Forgragiab.XinongTechnologa.getagang Road,Fuynog Subdistrict, Baolan, Shenzhen, China 518103 tt (86–755) 88663988 ft (86–755) 26710594 www.sgsgroup.com.cn 中国・深圳・宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 tt (86–755) 88663988 ft (86–755) 26710594 sgs.china@sgs.com



 Report No.:
 FYCR220600021901

 Page:
 6 of 28

# 4 General Information

### 4.1 Details of E.U.T.

Power supply:	Model: CR-MACI-TN-PC		
	Input: DC 5V/2A,9V/2.2A		
	Wireless Output:15W(Max)		
Operation frequency:	110.6kHz to 138.4kHz		
Modulation type:	Load modulation		
Antenna type:	Loop Antenna		

### 4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Mobile Phone	HUAWEI	LYA-AL00	REF. No.SEA16C00
iPhone 13	Apple	MLE03ZA/A	REF. No.SEA16Q01
Mobile Phone	SAMSUNG	SM-G9810	REF. No.SEA16K00

### 4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Mains Power Port (150kHz-30MHz)	± 2.1 dB (9kHz to 30MHz)
Radiated Emissions (30MHz-1GHz)	± 5.6dB
Radiated Emissions (9kHz-30MHz)	± 2.7dB
20dB Bandwidth	± 0.3%
Restricted Bands	± 0.3%
Pemark:	

Remark:

The Ulab (lab Uncertainty) is less than Ucispr/ETSI (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Countert, aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document cannot be reproduced except in full, without prior written approval of the Company hav, unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) testing and such aspne)(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN Doccheck@ss.com

Fuyong lab. Xiniong TechnoPark, Fenglang Road, Fuyong Subdistid, Bao'an, Shenzhen, China 518103 t (86–755) 88663988 f (86–755) 26710594 www.sgsgroup.com.cn 中国・深圳・宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 t (86–755) 88663988 f (86–755) 26710594 sgs.china@sgs.com



 Report No.:
 FYCR220600021901

 Page:
 7 of 28

### 4.4 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc. Shenzhen branch.

Fuyong lab. Xinlong TechnoPark, Fengtang Road, Fuyong Subdistrict, Bao'an, Shenzhen, China Tel: +86 755 8866 3988 Fax: +86 755 2671 0594

No tests were sub-contracted.

### 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • A2LA (Certificate No. 6606.01)

Compliance Certification Services (Kunshan) Inc. Shenzhen branch is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6606.01.

#### • FCC – Designation Number: CN1322

Compliance Certification Services (Kunshan) Inc. Shenzhen branch has been recognized as an accredited testing laboratory.

Designation Number: CN1322. Test Firm Registration Number: 718073

#### • Innovation, Science and Economic Development Canada

Compliance Certification Services (Kunshan) Inc. Shenzhen branch has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0129.

IC#: 28189.

4.6 Deviation from Standards

### 4.7 Abnormalities from Standard Conditions None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.Terms-en-Comment.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawill and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To breek the authenticity of testing inspection report a certificate, please contact us at telephone: (86-755) 8307 1443,

Flyong lab. Xinlong TechnoPark, Fenglang Road, Flyong Subdistict, Bao'an, Shenzhen, China 518103 t (86-755) 88663988 f (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 t (86-755) 88663988 f (86-755) 26710594 sgs.china@sgs.com



 Report No.:
 FYCR220600021901

 Page:
 8 of 28

# 5 Equipment List

Conducted Emissions at AC Mains Power Port (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	CRT	N/A	SEM001-14	2021/7/13	2024/7/12
EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-01	2021/7/13	2022/7/12
Two-Line V-Network	Rohde & Schwarz	ENV216	SEM007-16	2021/7/13	2022/7/12
Two-Line V-Network	Rohde & Schwarz	ESH3-Z5	SEM007-22	2022/1/10	2023/1/9

Radiated Emissions (30MHz-1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Anechoic Chamber	CRT	N/A	SEM001-13	2021/7/13	2022/7/12
MXE EMI receiver	Agilent	N9038A	SEM004-05	2021/7/13	2022/7/12
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	SEM003-15	2021/7/11	2024/7/10
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9120D	SEM003-32	2021/9/26	2024/9/25
Double-ridged waveguide horn	ETS-LINDGREN	3117	SEM003-34	2021/9/25	2024/9/24
Spectrum Analyzer	Rohde & Schwarz	101288	SEM004-08	2021/7/13	2022/7/12
Low Noise Amplifier	CLAVIIO	BDLNA-0118- 352810	SEM005-05	2021/7/13	2022/7/12
Pre-amplifier	Rohde & Schwarz	CH14-H052	SEM005-17	2021/7/13	2022/7/12

Radiated Emissions (9kHz-30MHz)						
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date	
3m Anechoic Chamber	CRT	N/A	SEM001-13	2021/7/13	2022/7/12	
Loop Antenna	ETS-LINDGREN	6502	SEM003-36	2021/9/26	2024/9/25	
MXE EMI receiver	Agilent	N9038A	SEM004-05	2021/7/13	2022/7/12	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Countert, aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document cannot be reproduced except in full, without prior written approval of the Company hav, unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) testing and such asphe)(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, commit (19 Document) (80 - 100 - 1

 Fuyong Bab. Xiniong TechnoPark, Fengtang Road, Fuyong Subdistrict, Bao'an, Shenzhen, China
 518103
 t (86-755) 88663988
 f (86-755) 26710594
 www.sgsgroup.com.cn

 中国・深圳・宝安区福永街道凤塘大道盘龙科技园福永实验室
 邮编: 518103
 t (86-755) 88663988
 f (86-755) 26710594
 sgs.china@sgs.com



Report No.: FYCR220600021901 Page: 9 of 28

20dB Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2021/7/13	2022/7/12
MXA Signal Analyzer(10Hz- 26.5GHz)	Agilent	N9020A	SEM004-20	2021/7/13	2022/7/12
Signal Generator(9kHz- 40GHz)	Agilent	N5173B	SEM006-05	2021/7/13	2022/7/12
ESG Vector Signal Generator(250kHz- 6GHz)	Agilent	E4438C	SEM006-15	2021/7/13	2022/7/12
Programmable DC Source	Chroma	62024P-80-60	SEM011-09	2021/7/13	2022/7/12
Attenuator(18GHz, 20dB, 2W)	Huber+Suhner	6620_SMA-50- 1	SEM021-09	2021/7/13	2022/7/12
Electric and Magnetic Field Probe - Analyzer(3kHz-30MHz)	Narda	EHP-200AC	SEM022-20	2022/4/6	2023/4/5

Restricted band					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2021/7/13	2022/7/12
MXA Signal Analyzer(10Hz- 26.5GHz)	Agilent	N9020A	SEM004-20	2021/7/13	2022/7/12
Signal Generator(9kHz- 40GHz)	Agilent	N5173B	SEM006-05	2021/7/13	2022/7/12
ESG Vector Signal Generator(250kHz- 6GHz)	Agilent	E4438C	SEM006-15	2021/7/13	2022/7/12
Programmable DC Source	Chroma	62024P-80-60	SEM011-09	2021/7/13	2022/7/12
Attenuator(18GHz, 20dB, 2W)	Huber+Suhner	6620_SMA-50- 1	SEM021-09	2021/7/13	2022/7/12
Electric and Magnetic Field Probe - Analyzer(3kHz-30MHz)	Narda	EHP-200AC	SEM022-20	2022/4/6	2023/4/5



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Countert, aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document cannot be reproduced except in full, without prior written approval of the Company hav, unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) testing and such asphel(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or amail: CN\_Doccheck@ss.com

t fungra (a). Xining TechnoPark, Fenglang Road, Fungra (Sad, Fungra Subtaint, Bao'an, Shenzhen, China 518103 t (86–755) 88663988 f (86–755) 26710594 www.sgsgroup.com.cn 中国・深圳・宝安区福永街道风塘大道鑫龙科技园福永实验室 邮编: 518103 t (86–755) 88663988 f (86–755) 26710594 sgs.china@sgs.com



Report No.: FYCR220600021901 Page: 10 of 28

General used equipment							
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date		
Humidity/ Temperature Indicator	Mingle	TH607	SEM002-22	2021-07-13	2022-07-12		
Humidity/ Temperature Indicator	Mingle	TH607	SEM002-23	2021-07-13	2022-07-12		
Barometer	DUMAI	DYM3	SEM002-24	2021-07-13	2022-07-12		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Countert, aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document cannot be reproduced except in full, without prior written approval of the Company hav, unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) testing and such asphe)(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or eventile (30 Decendent Samples) and the same first and such aspheres and for 30 days only.

Figungiab.XinongTechnoPark\_Fengang Road, Fugung Subdistict, Bao'an, Shenzhen, China 518103 tt (86–755) 88663988 ft (86–755) 26710594 www.sgsgroup.com.cn 中国・深圳・宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 tt (86–755) 88663988 ft (86–755) 26710594 sgs.china@sgs.com



Report No.: FYCR220600021901 Page: 11 of 28

# 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

### 6.1.1 Test Requirement:

47 FR Part 15, Subpart C 15.203

### 6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. Refer to internal photos



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forgery or failification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention; To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 8307 1443, or email: CM Doccheck@ses.com

Fuyong kab. Xinlong TechnoPark, Fengtang Road, Fuyong Subdistict, Bao'an, Shenzhen, China 518103 t (86-755) 88663988 f (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 t (86-755) 88663988 f (86-755) 26710594 sgs.china@sgs.com



Report No.: FYCR220600021901 Page: 12 of 28

# 7 Radio Spectrum Matter Test Results

### 7.1 Conducted Emissions at AC Mains Power Port (150kHz-30MHz)

Test Requirement	47 CFR Part 15, Subpart C 15.207
Test Method:	ANSI C63.10 (2013) Section 6.2

Limit:

	Conducted limit(dBµV)				
Frequency of emission(MHz)	Quasi-peak	Average			
0.15-0.5	66 to 56*	56 to 46*			
0.5-5	56	46			
5-30	60	50			
*Decreases with the logarithm of the frequency.					

### 7.1.1 E.U.T. Operation

Operating Enviror	iment:					
Temperature:	20.6 °C	Humidity:	53.9 % RH	Atmospheric Pressure:	1020	mbar

### 7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	00	Charge mode_Keep the EUT charging(5W)
Pre-scan	01	Charge mode_Keep the EUT charging(7.5W)
Pre-scan	02	Charge mode_Keep the EUT charging(10W)
Final test	03	Charge mode_Keep the EUT charging(15W)




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Countert, aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document cannot be reproduced except in full, without prior written approval of the Company hav, unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) testing and such aspne)(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or certific 10.

Flyong lab. Xinlong TechnoPark, Fenglang Road, Flyong Subdistict, Bao'an, Shenzhen, China 518103 t (86-755) 88663988 f (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 t (86-755) 88663988 f (86-755) 26710594 sgs.china@sgs.com



Report No.: FYCR220600021901 Page: 13 of 28

#### 7.1.3 Test Setup Diagram

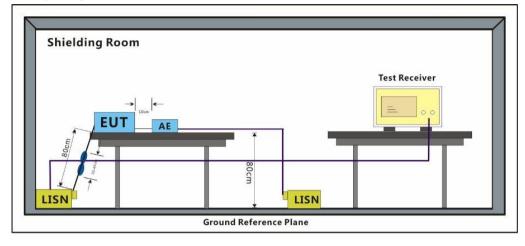

#### 7.1.4 Measurement Procedure and Data

1) The mains terminal disturbance voltage test was conducted in a shielded room.

2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50 $\mu$ H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,

4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.Terms-en-Comment.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawill and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To breek the authenticity of testing inspection report a certificate, please contact us at telephone: (86-755) 8307 1443,

Flyong lab. Xinlong TechnoPark, Fenglang Road, Flyong Subdistict, Bao'an, Shenzhen, China 518103 t (86-755) 88663988 f (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 t (86-755) 88663988 f (86-755) 26710594 sgs.china@sgs.com



Report No.: FYCR220600021901 Page: 14 of 28

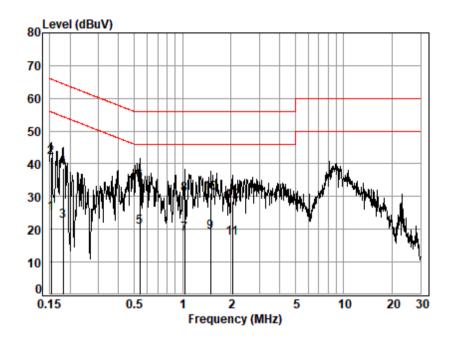

Test Mode: 03; Line: Live line

Site :	Shielding	Room
Condition:	Line	
Job No. :	00219AT	
Test mode:	03	

		Cable	LISN	Read		Limit	0ver	
	Freq	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1524	0.02	0.25	24.59	24.86	55.87	-31.01	Average
2	0.1524	0.02	0.25	41.70	41.97	65.87	-23.90	QP
3	0.1815	0.02	0.26	22.26	22.54	54.42	-31.88	Average
4	0.1815	0.02	0.26	38.39	38.67	64.42	-25.75	QP
5	0.5436	0.03	0.26	20.35	20.64	46.00	-25.36	Average
6	0.5436	0.03	0.26	34.29	34.58	56.00	-21.42	QP
7	1.0320	0.03	0.19	18.25	18.47	46.00	-27.53	Average
8	1.0320	0.03	0.19	30.60	30.82	56.00	-25.18	QP
9	1.4953	0.02	0.18	19.09	19.29	46.00	-26.71	Average
10	1.4953	0.02	0.18	30.92	31.12	56.00	-24.88	QP
11	2.0441	0.01	0.17	17.09	17.27	46.00	-28.73	Average
12	2.0441	0.01	0.17	28.54	28.72	56.00	-27.28	QP




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Countert, aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document cannot be reproduced except in full, without prior written approval of the Company hav, unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) testing and such aspne)(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or ceredit.


Fuyong lab. Xinlong TechnoPark, Fengtang Road, Fuyong Subdistict, Bao'an, Shenzhen, China 518103 t (86-755) 88663988 f (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 t (86-755) 88663988 f (86-755) 26710594 sgs.china@sgs.com



Report No.: FYCR220600021901 Page: 15 of 28

Test Mode: 03; Line: Neutral Line

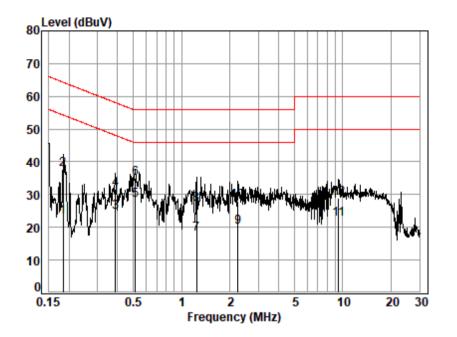



		Cable	LISN	Read		Limit	0ver	
	Freq	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1844	0.02	0.29	22.70	23.01	54.28	-31.27	Average
2	0.1844	0.02	0.29	37.32	37.63	64.28	-26.65	QP
3	0.3893	0.03	0.28	24.41	24.72	48.08	-23.36	Average
4	0.3893	0.03	0.28	31.40	31.71	58.08	-26.37	QP
5	0.5155	0.02	0.26	28.03	28.31	46.00	-17.69	Average
6	0.5155	0.02	0.26	34.64	34.92	56.00	-21.08	QP
7	1.2422	0.02	0.08	17.70	17.80	46.00	-28.20	Average
8	1.2422	0.02	0.08	27.07	27.17	56.00	-28.83	QP
9	2.2367	0.01	0.13	20.07	20.21	46.00	-25.79	Average
10	2.2367	0.01	0.13	27.81	27.95	56.00	-28.05	QP
11	9.4514	0.04	0.15	22.34	22.53	50.00	-27.47	Average
12	9.4514	0.04	0.15	28.65	28.84	60.00	-31.16	QP



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Countert, aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document cannot be reproduced except in full, without prior written approval of the Company hav, unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) testing and such aspne)(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or eventil's Docebeck to a such aspne).

Fuyong lab. Xinlong TechnoPark, Fengtang Road, Fuyong Subdistict, Bao'an, Shenzhen, China 518103 t (86-755) 88663988 f (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・宝安区福永街道反塘大道鑫龙科技园福永实验室 邮编: 518103 t (86-755) 88663988 f (86-755) 26710594 sgs.china@sgs.com



Report No.: FYCR220600021901 Page: 16 of 28

### 7.2 Radiated Emissions (30MHz-1GHz)

Test Requirement	47 CFR Part 15, Subpart C 15.205 & 15.209
Test Method:	ANSI C63.10 (2013) Section 6.5
Measurement Distance:	3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)						
30-88	100	3						
88-216	150	3						
216-960	200	3						
Above 960	500	3						
Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector.								

#### 7.2.1 E.U.T. Operation

Operating Environment:								
Temperature:	22.6 °C	Humidity:	45.8 % RH	Atmospheric Pressure:	1020	mbar		

### 7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	00	Charge mode_Keep the EUT charging(5W)
Pre-scan	01	Charge mode_Keep the EUT charging(7.5W)
Pre-scan	02	Charge mode_Keep the EUT charging(10W)
Final test	03	Charge mode_Keep the EUT charging(15W)




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Countert, aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document cannot be reproduced except in full, without prior written approval of the Company hav, nuarthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) testing and such aspne)(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or certific 10.

Fuyorg lab. Xiniong TechnoPark, Fenglang Road, Fuyorg Subdistict, Bao'an, Shenzhen, China 518103 tt (86–755) 88663988 ft (86–755) 26710594 www.sgsgroup.com.cn 中国 •深圳 •宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 tt (86–755) 88663988 ft (86–755) 26710594 sgs.china@sgs.com



Report No.: FYCR220600021901 Page: 17 of 28

#### 7.2.3 Test Setup Diagram

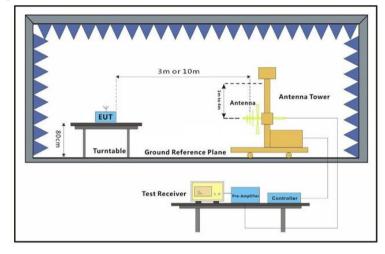

#### 7.2.4 Measurement Procedure and Data

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground for below 1GHz at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel, the middle channel, the Highest channel

h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case.

i. Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forger or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@ses.com

Fuyong lab. Xinlong TechnoPark, Fengtang Road, Fuyong Subdishid, Barlan, Shenzhen, China 518103 tt (86-755) 88663988 ft (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 tt (86-755) 88663988 ft (86-755) 26710594 sgs.china@sgs.com



Report No.: FYCR220600021901 Page: 18 of 28

Test Mode: 03; Polarity: Horizontal

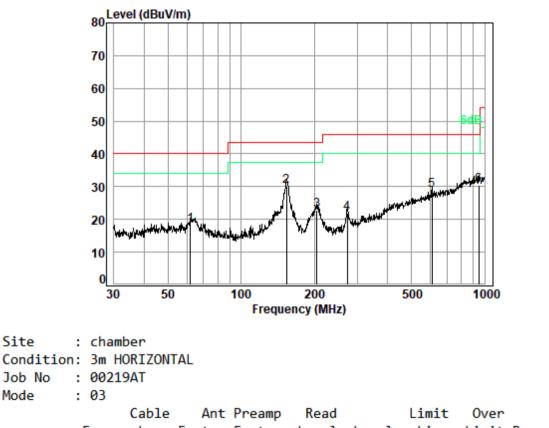

	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	61.7781	0.24	16.72	24.85	26.24	18.35	40.00	-21.65	QP
2	153.7385	0.83	17.35	25.54	37.57	30.21	43.50	-13.29	QP
3	204.9551	0.71	15.32	25.57	32.30	22.76	43.50	-20.74	QP
4	272.2776	0.91	17.38	25.59	29.05	21.75	46.00	-24.25	QP
5	607.7867	2.12	24.48	25.70	27.97	28.87	46.00	-17.13	QP
6	948.7610	2.08	29.26	25.47	24.64	30.51	46.00	-15.49	QP




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, reserved.

Fuyong lab. Xinlong TechnoPark, Fengtang Road, Fuyong Subdistict, Bao'an, Shenzhen, China 518103 t (86-755) 88663988 f (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・宝安区福永街道反塘大道鑫龙科技园福永实验室 邮编: 518103 t (86-755) 88663988 f (86-755) 26710594 sgs.china@sgs.com



Report No.: FYCR220600021901 Page: 19 of 28

Test Mode: 03; Polarity: Vertical

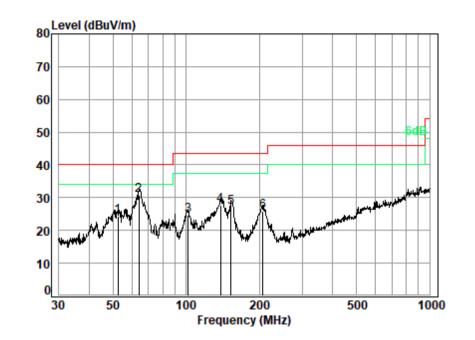

Site :	chamber
Condition:	3m VERTICAL
Job No :	00219AT

Mode : 03

		Cable	Ant	Preamp	Read		Limit	0ver	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	52.3913	0.22	17.28	24.89	31.61	24.22	40.00	-15.78	QP
2	63.9828	0.25	16.62	24.85	38.62	30.64	40.00	-9.36	QP
3	102.0014	0.85	14.57	25.50	34.66	24.58	43.50	-18.92	QP
4	138.3873	0.91	17.31	25.53	35.09	27.78	43.50	-15.72	QP
5	153.2004								-
	206.3976								-
									•



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Countert, aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document cannot be reproduced except in full, without prior written approval of the Company hav, unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) testing and such aspne)(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or certific 10.

Fuyong lab. Xinlong TechnoPark, Fengtang Road, Fuyong Subdistict, Bao'an, Shenzhen, China 518103 t (86-755) 88663988 f (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 t (86-755) 88663988 f (86-755) 26710594 sgs.china@sgs.com



 Report No.:
 FYCR220600021901

 Page:
 20 of 28

### 7.3 Radiated Emissions (9kHz-30MHz)

Test Requirement	47 CFR Part 15, Subpart C 15.205 & 15.209
Test Method:	ANSI C63.10 (2013) Section 6.4
Measurement Distance:	3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)					
0.009-0.490	2400/F(kHz)	300					
0.490-1.705	24000/F(kHz)	30					
1.705-30.0	30	30					
Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.							

If field strength is measured at only a single point, then that point shall be at the radial from the EUT that produces the maximum emission at the frequency being measured, as described in 5.4. If that point is closer to the EUT than  $\lambda/2\pi$  and the limit distance is greater than  $\lambda/2\pi$ , the measurement shall be extrapolated to the limit distance by conservatively presuming that the field strength decreases at a 40 dB/decade of distance rate to the  $\lambda/2\pi$  distance, and at a 20 dB/decade of distance rate beyond  $\lambda/2\pi$ . This shall be accomplished using Equation (2):

$$FS_{(10m)} = FS_{(30/300m)} + 40log\{d_{(near field)}/d_{(10m)}\} + 20log\{d_{(30/300m)}/d_{(near field)}\}$$
(2)

If the single point measured is at a distance greater than  $\lambda/2\pi$ , then extrapolation to the limit distance shall be calculated using Equation (3):

$$FS_{(10m)} = FS_{(30/300m)} + 20log\{d_{(30/300m)}/d_{(10m)}\}$$
(3)

If both the single point and the limit distance are equal to or closer to the EUT than  $\lambda/2\pi$ , then extrapolation to the limit distance shall be calculated using Equation (4):

$$FS_{(10m)} = FS_{(30/300m)} + 40 \log\{d_{(30/300m)}/d_{(10m)}\}$$
(4)

Remark:

 $d_{\text{near field}} = 47.77 \ / \ f_{\text{MHz}}$  where  $f_{\text{MHz}}$  is the frequency of the emission being measured in MHz.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or results shown in this test report refer only to the sample(s) are related for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, or email: Ch.Doccheck&ses.com

Fuyong lab. Xinlong TechnoPark, Fengtang Road, Fuyong Subdishid, Bavian, Shenzhen, China 518103 t (86-755) 88663988 f (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 t (86-755) 88663988 f (86-755) 26710594 sgs.china@sgs.com



Report No.: FYCR220600021901 Page: 21 of 28


### 7.3.1 E.U.T. Operation

Operating Environment:									
Temperature:	22.6 °C	Humidity:	48.7 % RH	Atmospheric Pressure:	1020	mbar			

### 7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	00	Charge mode_Keep the EUT charging(5W)
Pre-scan	01	Charge mode_Keep the EUT charging(7.5W)
Pre-scan	02	Charge mode_Keep the EUT charging(10W)
Final test	03	Charge mode_Keep the EUT charging(15W)

### 7.3.3 Test Setup Diagram

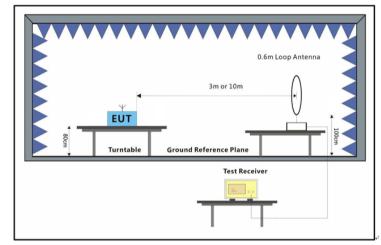

### 7.3.4 Measurement Procedure and Data

a. All radiated emission measurements in terms of magnetic field strength shall be performed with a shielded loop antenna.

b. For all radiated emission measurements in terms of magnetic field strength, the loop antenna were placed such that:

i. its centre shall be at 1.3 m height above the ground plane;

ii. the projection of its centre onto the ground plane shall be at the specified measurement distance from the projection on the ground plane of the closest point on the boundary of the equipment under test (EUT); and

iii. measurements shall be performed with the loop antenna placed vertically, in turn, in two polarizations (the measurement axis specified below is the line segment connecting the projections on the ground plane of the centre of the loop antenna and the centre of the EUT arrangement):

- · coaxial (loop plane perpendicular to the ground plane and to the measurement axis); and
- · coplanar (loop plane perpendicular to the ground plane and coplanar with the measurement axis).




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions

Fuyong lab. Xinlong TechnoPark, Fengtang Road, Fuyong Subdishitd, Bacian, Shenzhen, China 518103 tt (86–755) 88663988 ft (86–755) 26710594 www.sgsgroup.com.cn 中国・深圳・宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 tt (86–755) 88663988 ft (86–755) 26710594 sgs.china@sgs.com



 Report No.:
 FYCR220600021901

 Page:
 22 of 28

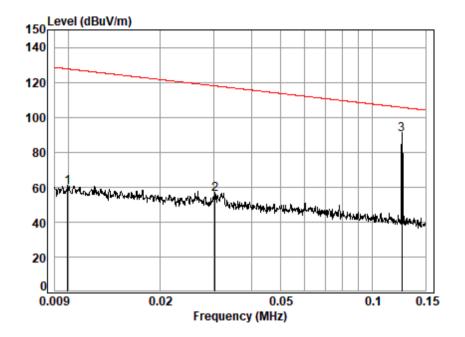

Condition:	3m
Job No. :	00219AT
Test Mode:	03

	Freq				Read Level				Remark
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	0.0099								Average
2	0.0303	0.31	12.04	31.70	75.40	56.05	117.96	-61.91	Average
3	0.1253	0.33	10.43	31.79	111.26	90.23	105.65	-15.42	Average




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Countert, aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document cannot be reproduced except in full, without prior written approval of the Company hav, unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) testing and such aspne)(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or certific 10.

Fuyong kab. Xiniong TechnoPark, Fengtang Road, Fuyong Subdistrict, Barian, Shenzhen, China 518103 t (86-755) 88663988 f (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 t (86-755) 88663988 f (86-755) 26710594 sgs.china@sgs.com



 Report No.:
 FYCR220600021901

 Page:
 23 of 28

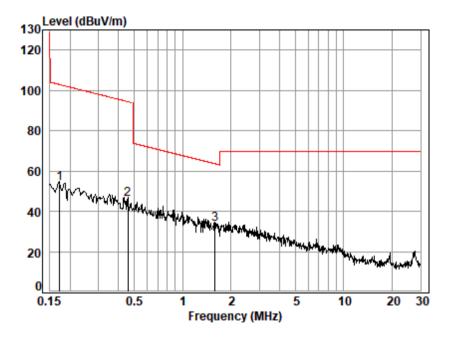

Condition: 3m Job No. : 00219AT Test Mode: 03

	Freq			Preamp Factor					Remark
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1									Average
2	0.4588	0.30	10.31	31.73	67.03	45.91	94.37	-48.46	Average
3	1.5935	0.36	10.29	31.76	54.87	33.76	63.56	-29.80	QP



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-an-Comterms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-an-Comterms-and-Conditions for the Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Cond

Fuyorg kab. Xiniong TechnoPark, Fenglang Road, Fuyong Subdistict, Bao'an, Shenzhen, China 518103 t (86-755) 88663988 f (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 t (86-755) 88663988 f (86-755) 26710594 sgs.china@sgs.com



 Report No.:
 FYCR220600021901

 Page:
 24 of 28

### 7.4 20dB Bandwidth

Test Requirement	47 CFR Part 15, Subpart C 15.215
Test Method:	ANSI C63.10 (2013) Section 6.9.2

Limit: For report reference only


### 7.4.1 E.U.T. Operation

Operating Environ	iment:					
Temperature:	23.4 °C	Humidity:	65.3 % RH	Atmospheric Pressure:	1020	mbar

### 7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	00	Charge mode_Keep the EUT charging(5W)
Pre-scan	01	Charge mode_Keep the EUT charging(7.5W)
Pre-scan	02	Charge mode_Keep the EUT charging(10W)
Final test	03	Charge mode_Keep the EUT charging(15W)

### 7.4.3 Test Setup Diagram

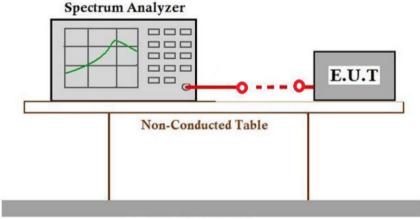

Ground Reference Plane

### 7.4.4 Measurement Procedure and Data

Test Mode:03



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Countert, aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document cannot be reproduced except in full, without prior written approval of the Company hav, unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) testing and such aspne)(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Fuyong lab. Xinlong TechnoPark, Fengtang Road, Fuyong Subdishid, Barlan, Shenzhen, China 518103 tt (86-755) 88663988 ft (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 tt (86-755) 88663988 ft (86-755) 26710594 sgs.china@sgs.com



Report No.: FYCR220600021901 Page: 25 of 28 Marker 1 [T1 ] RBW 10 Hz X VBW 30 Hz -35.12 dBm Ref -20 dBm Att 10 dB SWT 1 s 136.300200000 kHz ndB [T1] 20.00 dB -20 26.00000000 Hz вW А [T] Temp nd -30. -55.31 dBm PK TEW 136.287200000 kHz -40 -55.30 dBm 136.313200000 kHz -50. т2 -60. -70 -80. -90 -100. -110 -120 Center 136.3 kHz 10 Hz/ Span 100 Hz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions

 Fuyorg lab. Xinlong TechnoPark, Fengtang Road, Fuyorg Subdistict, Bao'an, Shenzhen, China
 518103
 t
 (86–755)
 88663988
 f
 (86–755)
 26710594
 www.segsgroup.com.cn

 中国・深圳・宝安区福永街道凤塘大道鑫龙科技园福永实验室
 邮编:
 518103
 t
 (86–755)
 88663988
 f
 (86–755)
 26710594
 www.segsgroup.com.cn



 Report No.:
 FYCR220600021901

 Page:
 26 of 28

### 7.5 Restricted Bands

Test Requirement	47 CFR Part 15, Subpart C 15.205
Test Method:	ANSI C63.10 (2013) Section 6.10.5

Limit:

The fundamental wave could not fall in the restricted band 90KHz-110KHz


### 7.5.1 E.U.T. Operation

Operating Environment:				
Temperature:	23.4 °C	Humidity:	65.4 % RH	Atmospheric Pressure: 1020 mbar

#### 7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	00	Charge mode_Keep the EUT charging(5W)
Pre-scan	01	Charge mode_Keep the EUT charging(7.5W)
Pre-scan	02	Charge mode_Keep the EUT charging(10W)
Final test	03	Charge mode_Keep the EUT charging(15W)

### 7.5.3 Test Setup Diagram

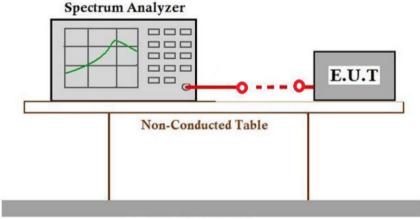

#### **Ground Reference Plane**

### 7.5.4 Measurement Procedure and Data

Test Mode:03




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Countert, aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document cannot be reproduced except in full, without prior written approval of the Company hav, unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) testing and such aspne)(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Fuyong lab. Xinlong TechnoPark, Fenglang Road, Fuyong Subdistict, Bao'an, Shenzhen, China 518103 tt (86–755) 88663988 ft (86–755) 26710594 www.sgsgroup.com.cn 中国 ·深圳 ·宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 tt (86–755) 88663988 ft (86–755) 26710594 sgs.china@sgs.com



Report No.: FYCR220600021901 Page: 27 of 28

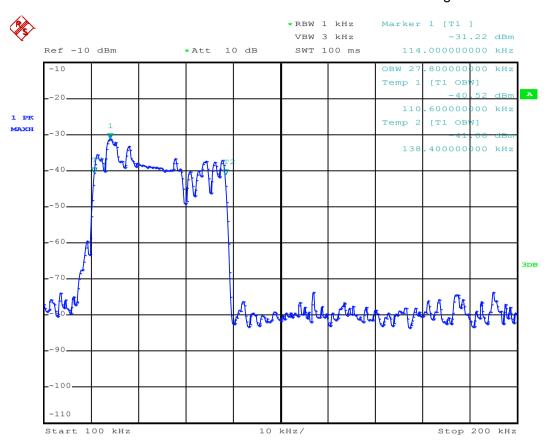



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions

Fuyong lab. Xinlong TechnoPark, Fenglang Road, Fuyong Subdistict, Bao'an, Shenzhen, China 518103 tt (86–755) 88663988 ft (86–755) 26710594 www.sgsgroup.com.cn 中国 ·深圳 ·宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 tt (86–755) 88663988 ft (86–755) 26710594 sgs.china@sgs.com



 Report No.:
 FYCR220600021901

 Page:
 28 of 28

# 8 Test Setup Photo

Refer to Appendix - Test Setup Photo for FYCR2206000219AT

# 9 EUT Constructional Details (EUT Photos)

Refer to Appendix – External and Internal Photos for FYCR2206000219AT

- End of the Report -



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Countert, aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document cannot be reproduced except in full, without prior written approval of the Company hav, unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) testing and such aspne)(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN Doccheck@ss.com

Fuyong lab. Xinlong TechnoPark, Fengtang Road, Fuyong Subdishid, Barlan, Shenzhen, China 518103 tt (86-755) 88663988 ft (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 tt (86-755) 88663988 ft (86-755) 26710594 sgs.china@sgs.com