
# JEEP WIRELESS SPEAKER

Model 6LQ27TRMXX



**USER GUIDE** 


# **GET TO KNOW YOUR SPEAKER**

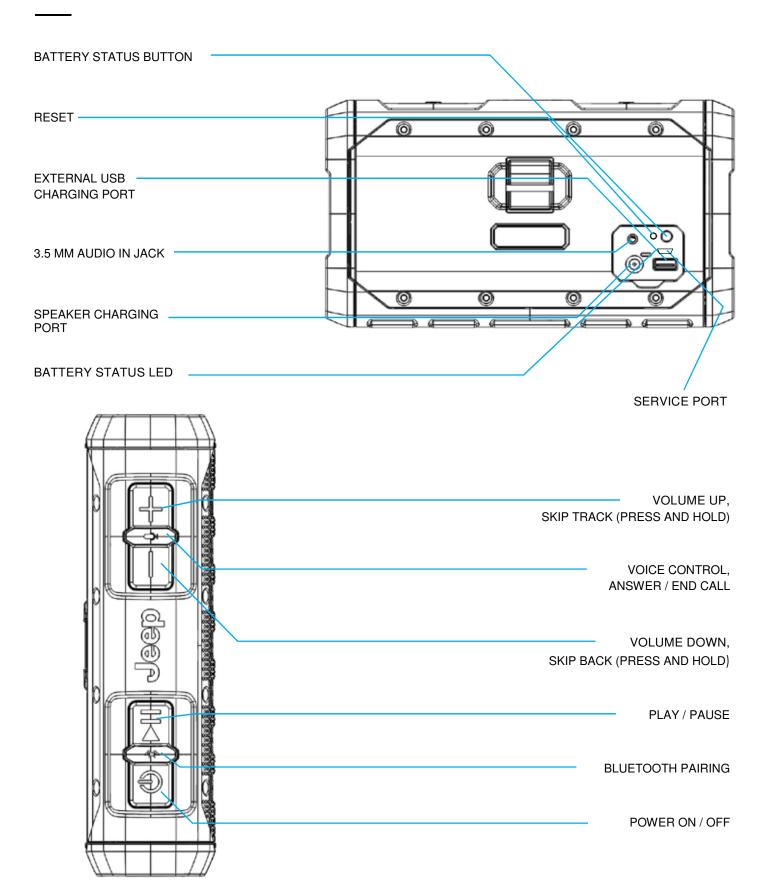

# **UNDOCKING YOUR SPEAKER**

Pull straight on the release strap to undock your wireless speaker.


**Note:** The speaker will be in the off state upon undocking from the vehicle dock.

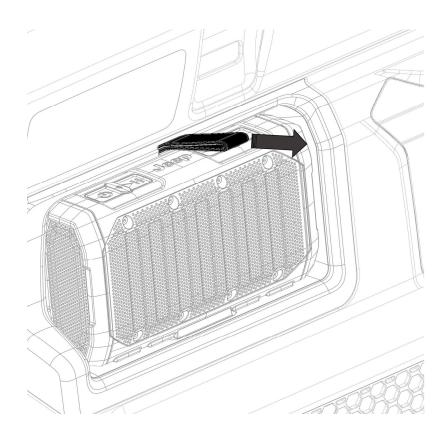


# **DOCKING YOUR SPEAKER**

First, set the wireless speaker onto the pivot in the bottom center of the vehicle dock. Then, lightly push against the speaker to rock it back until the latch is completely closed.

Note: Speaker Bluetooth functionality, button functionality, and LED functionality are disabled in the vehicle dock while your speaker plays with your Jeep audio system.

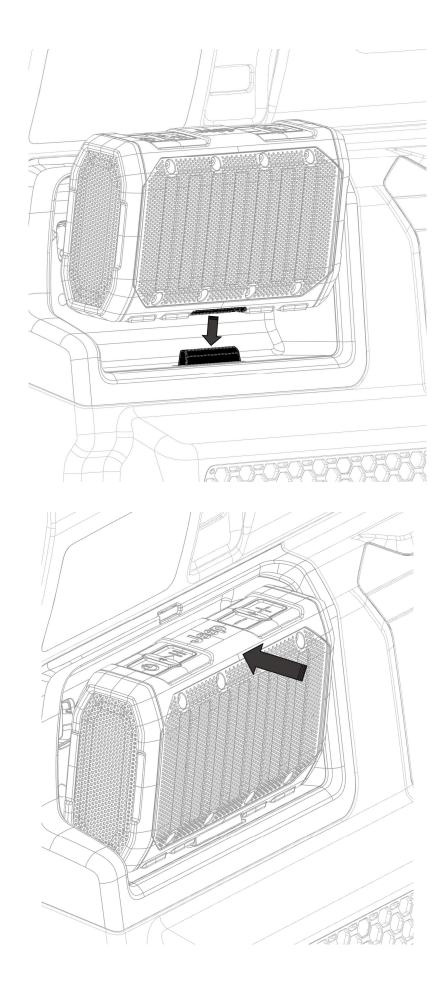

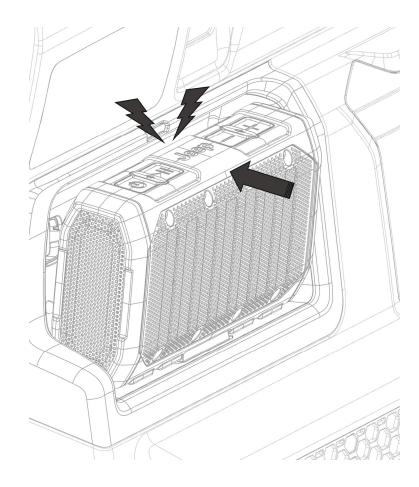

# POWER & BLUETOOTH PAIRING

- 1. Press the power button for 2-3 seconds to turn your speaker on or off.
- ${f 2}$ . Toggle Bluetooth $^{f B}$  on in your device settings. For further instruction on how to do so, please refer to the user manual included with your mobile device.
- ${f 3}$  . Your speaker will automatically enter pairing mode when powered on. Pair a second device by pressing and holding the Bluetooth  $^{f B}$  button for 2-3 seconds, until you hear the audio cue. Go to your device's
  - Bluetooth  $^{\circledR}$  settings and select "Jeep Speaker" from the list.

Your speaker will remember the last 8 devices it has paired with.

**NOTE:** If your speaker is left on with an inactive Bluetooth<sup>®</sup> connection for 30 minutes, it will automatically power off. Power your speaker on again by pressing and holding the power button for 2-3 seconds.

## **VOLUME AND PLAYBACK CONTROL**

Increase volume by pressing the "+" button or decrease volume by pressing the "-" button. An audio cue will indicate when you've reached max volume.

Skip to the next track by pressing the "+" button or play the previous track by pressing and holding the "-" button.

# CHARGING YOUR SPEAKER

Before using your Jeep wireless speaker for the first time, fully charge your speaker until the battery indicator light stays solid green.

Charge your Jeep wireless speaker by installing it into the charging dock of your Jeep vehicle when it is in run/accessory. The speaker also charges while using a compatible power adapter (not included). Plug the adapter into the speaker charging port on the back of the speaker, then into a wall outlet.

**MONITORING BATTERY LEVEL:** Use the Battery Status LED to monitor your speaker's battery level. Red = 30% or lower, Yellow = 30% - 70%, Green = 70% - 100%.

NOTE: The speaker must be turned on to observe the Battery Status LED.

# CHARGING EXTERNAL DEVICES

Your speaker can charge most USB enabled smartphones and tablets using the full-sized USB port. To use external charging:

- 1. Turn your speaker on.
- 2. Plug your USB power cable into the USB port on the back of your speaker.
- 3. Insert the other end of the cable into your device to immediately begin charging.

**NOTE:** External USB charging will be disabled when the speaker battery level reaches 30% or below (battery status LED is red). It will automatically enable when the speaker has been charged back up to 50%.

#### **SPEAKERPHONE**

Press the mic button on your speaker to answer and end calls over the speakerphone.

### WATERPROOF FEATURES

The Jeep wireless speaker is IP67 waterproof certified, designed to withstand a dunk in up to 3 feet / 1 meter of water for up to 30 minutes.

**IMPORTANT:** Ensure your speaker is prepared for use in a wet environment by removing all cable connections and tightly sealing the port cover. If the cover is not securely fastened, your speaker may sustain water damage.

# RESETTING YOUR SPEAKER

Reset your Jeep wireless speaker to its original factory settings by pressing the reset button under the back cover for 8-10 seconds.

# **OPERATING TEMPERATURE**

The Jeep wireless speaker battery will charge during 32 to 113 F (0 to 45 ° C). The speaker contains a lithium-ion rechargeable battery. Typical charging temperatures for these types of batteries are from 32 to 113 ° F (0 to 45 ° C).

**IMPORTANT**: The functions described in this user guide only pertain to when your Jeep Speaker is unplugged from its dock. When plugged into the docking station, your speaker functions as part of your vehicle's sound system.

# WARNINGS, CAUTION & LEGAL INFORMATION

To reduce the risk of fire or electric shock, do not expose the Jeep wireless speaker to rain or moisture while charging. The Jeep wireless speaker should not be exposed to dripping or splashing, and objects filled with liquids, such as vases, should not be placed on or near it while being charged or charging other devices. As with any electronic products, use care not to spill liquids into any part of the product. Liquids can cause a failure and/or a fire hazard. The power supply must be used indoors only. Make no modifications to the product or accessories. Unauthorized alterations may compromise safety, regulatory compliance, and system performance, and will void the warranty. Do not place any flame sources, such as lighted candles, on or near the Jeep wireless speaker. The Jeep wireless speaker contains small parts that may be a choking hazard and is not suitable for children under age 3. Do not continue charging the battery if it does not reach full charge within the specified charging time. Overcharging may cause the battery to become hot, rupture, or ignite. If you see any heat deformation or leakage, properly dispose of the battery. Do not attempt to charge the battery in temperatures outside the range of 32°-104°F (0° - 40°C). If the battery begins to leak, do not allow the liquid to come in contact with your skin or eyes. If contact has been made, wash the affected area with plenty of water and seek medical attention immediately. Do not expose the product or battery to excessive heat, including direct sunlight or fire and storage or use inside cars in hot weather, where it can be exposed to temperatures in excess of 115°F (60°C). Doing so may cause the battery and power supply to generate heat, rupture, or ignite. Using the product in this manner also may result in a loss of performance and a shortened life expectancy. Extended exposure to direct sunlight may damage the external appearance and material qualities. Do not step on, throw, or drop batteries or the power supply or device, or expose them to a strong shock. Do not pierce, crush, dent, or deform the batteries or power supply in any way. If either becomes deformed, properly dispose of it. Do not short-circuit batteries. Do not attempt to service the Jeep wireless speaker yourself. Opening or removing covers may expose you to dangerous voltages or other hazards and will void the manufacturer's warranty. To prevent risk of fire or electric shock, avoid overloading wall outlets, extension cords, or integral convenience receptacles. Your Bluetooth device (mobile phone, music player, tablet, laptop, etc.) must support the A2DP Bluetooth profile in order to work wirelessly with your new Jeep wireless speaker. The A2DP profile is supported by most recent mobile products with built-in Bluetooth capability. Please refer to your device's user manual for details and instruction regarding the Bluetooth profiles it supports. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Correct Disposal of this product. This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased.

Jeep follows Safety Instruction for CE-LV. Do not operate products in temperatures outside the range of -5 to 40 °C. Operating Frequency Band: 2402 MHz to 2480 MHz Maximum RF power: 6 dBm EIRP. Do not install this equipment in a confined or buildingin a space such as a book case or similar unit and remain a well ventilation conditions. The ventilation should not be impeded by covering the ventilation openings with items such as newspaper, table- cloths, curtains etc.

WARNING: To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture. The apparatus shall not be exposed to dripping or splashing and that objects filled with liquids, such as vases, shall not be placed on apparatus.

WARNING: The power adapter is used when the device is undocked from the vehicle so it can be readily charged outside the vehicle.

WARNING: Please refer to the information on the bottom of the speaker for electrical and safety information before installing or operating the speaker.

CAUTION: Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type. The battery (battery or batteries of battery pack) shall not be exposed to excessive heat or fire.

Directive 2014/53/EU Article 10 Obligations of Manufacturers

- 2. Manufacturers shall ensure that radio equipment shall be so constructed that it can be operated in at least one Member State without infringing applicable requirements on the use of radio spectrum.
- 10. In cases of restrictions on putting in to service or of requirements for authorization of use, information available on the packaging shall allow the identification of the Member States or the geographical area within a Member State where restrictions on putting into service or requirements for authorization of use exist. The Commission may adopt implementing acts specifying how to present that information. Those implementing acts shall be adopted in accordance with the advisor y procedure referred to in Article 45 (2).

#### COMPLIANCE INFORMATION

#### FCC

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not ® This product complies with California installed and used in accordance with the Energy Commission efficiency standards for instructions, may cause harmful interference to consumer battery chargers. radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does **EUROPE** cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:-Reorient or relocate the receiving antenna. — Increase the separation between the equipment and receiver. — Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. — Consult the dealer or an experienced radio/ TV technician for help. CAUTION: Any changes or modifications not expressly approved by the CANADA party responsible for compliance could void the user's authority to operate the equipment. This device complies with Innovation, Science, FCC RADIATION EXPOSURE STATEMENT: To satisfy FCC RF exposure requirements for mobile transmitting devices, a separation distance of 20cm or more should be maintained between the antenna of this device and persons during operation. To ensure compliance, operations at closer distances than this are not recommended. This device complies with FCC radiation d'Industrie exposure limits set forth for an uncontrolled Canada applicables aux appareils radio

to meet the general RF exposure requirement. autorisée aux deux conditions This device complies with Industry Canada suivantes: license-exempt RSS standard(s). Operation is 1) l'appareil ne doit pas produire de subject to the following two conditions: (1) this brouillage; device may not cause interference, and (2) this 2) I'appareil doit accepter tout brouillage device must accept any interference, radioélectrique including interference that may cause subi, même si le brouillage est susceptible d'en undesired operation of the device. Under compromettre le fonctionnement. Industry Canada regulations, this radio transmitter may only operate using an antenna Pour satisfaire aux exigences de la FCC en of a type and maximum (or lesser) gain matière d'exposition aux radiofréquences approved for the transmitter by Industry pour les appareils émetteurs mobiles, une reduce interference to other users, the antenna type être respectée entre l'antenne de cet equivalent isotropically radiated power Pour garantir la conformité, les opérations à (e.i.r.p.) is not more than that necessary for des distances plus rapprochées ne sont pas successful communication. The device has recommandées. been evaluated to meet general RF exposure

requirement. This Class B digital apparatus

MAINS plug is used as the disconnect device, CMIIT ID: XXXXYZNNNNN the disconnect device shall remain readily operable. The device meets the exemption KOREA from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS-102 RF exposure, users can obtain Canadian information on RF exposure and compliance.



Alpine hereby declares that this device is in compliance with Radio Equipment Directive 2014 / 53 / EU. The full text of the EU DoC is available at the following:

https://www.alpine.com/j/research/do


and Economic Development Canada's licence exempt RSSs. Operation is subject to the following two conditions:


- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device. Le présent appareil est conforme aux CNR

environment. The device has been evaluated exempts de licence. L'exploitation est

potential radio distance de séparation de 20 cm ou plus doit and its gain should be so chosen that the appareil et les personnes en fonctionnement.

#### complies with Canadian ICES- 003. Lithium CHINA





#### **MEXICO**

#### IFETEL #: XXXXXXXXX

La operación de este equipo está sujeta a las siguientes dos condiciones: (1) es posible que este equipo o dispositivono cause interferencia perjudicial y (2) este equipo o dispositivo debe aceptar cualquier interferencia, incluyendo la que pueda causar su operación no deseada.

#### OMAN

**OMAN-TRA** X/NNNN/YY Dyynnnn

#### **RUSSIA**



#### **SOUTH AFRICA**

