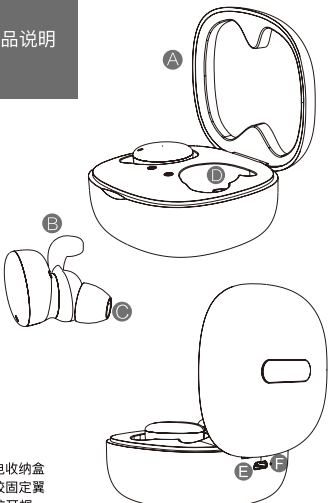
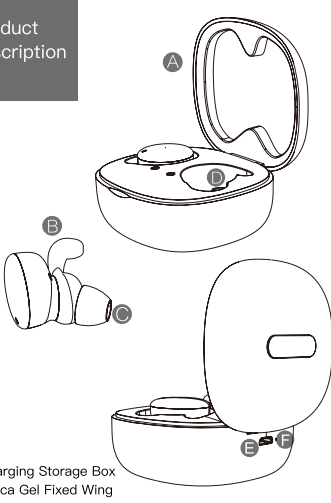


WB-259说明书

<div>产品说明</div> <div></div> <div>使用说明</div> <div>WB-259真无线蓝牙耳机</div>		<div>规格</div> <div>参数</div> <div>喇叭:Φ10*4.3 额定功率:3mW 最大功率:5mW 声压级:99±3dB At1000Hz At0.179V 左/右平衡:<3dB at1KHz 1mW 失真度:<3% at 1KHz 1mW 频率响应:20-20000Hz 阻抗:32Ω±15% at 1000Hz 芯片: BES2000U 蓝牙版本: V 4.2 电池容量: 50毫安 充电时间: 约1.5小时 播放时间: 约2.5小时 (中等音量) 通话时间: 约2.5小时 待机时间: 60小时 蓝牙范围: 10米 充电盒电池容量: 300mAh 充电盒可供耳机充电次数: 约3次 蓝牙协议: A2DP1.3, HFP1.5, AVRCP1.5</div>	<div>使用说明</div> <div>• 主机：右耳机WB-259R 副机：左耳机WB-259L 1.从充电盒中取出耳机,耳机启动开机,耳机有提示音。进入2个耳机的互相配对状态。 2.2个耳机完成配对后,左右耳机会有提示音:左声道/右声道,完成配对。右耳机变成红灯交替闪烁,副耳机变成蓝灯常亮。 3.开启手机蓝牙,搜索到WB-259R点连接完成和手机的配对。 4.如果已经和手机配对过,第二次开机后蓝牙耳机会自动配对成功,如果未配对成功,请关闭蓝牙,删除手机蓝牙配对记录,重复以上操作即可。 5.两部耳机分开使用:触摸耳机表面,开机后继续按住不要松手,直到红灯交替闪烁后再松手,打开手机的蓝牙设置,搜索到右耳机WB-259/左耳机WB-259L,点连接完成和手机的配对。 6.语音切换:在配对模式(红灯交替闪烁),点击触摸按键就会听到语音切换的提示音。 • 蓝牙耳机和手机配对成功后连接操作 1.暂停/播放:在播放状态下,短按耳机表面的触摸按键暂停,再按一次继续播放。 2.来电接听:有电话呼入,长按耳机表面的触摸按键接听。 3.来电拒接:有电话呼入,长按耳机表面的触摸按键2秒拒接。 4.关机——直触摸耳机表面,直接到耳机红灯亮起,提示音提示关机,耳机进入关机状态。2个配对好的耳机随意关其中一个就可以2个同时关机,但是开机需要分别控制耳机。 5.上一曲:双耳机使用时双击左耳机为上一曲 6.下一曲:双击右耳机为下一曲</div>	<div>使用说明</div> <div>• 关于充电 1.充电盒充电:收纳盒上连接了5V/300mA旅行充电器给收纳盒充电,收纳盒上红灯会闪烁时表示正在充电中,红灯常亮时表示充电已完成。 2.收纳盒和耳机同时充电:收纳盒内放有耳机时,收纳盒上连接了5V/300mA旅行充电器给收纳盒充电时,2个耳机也会同时充电,收纳盒上红灯会闪烁时表示收纳盒正在充电中。2个耳机上红灯常亮表示耳机正在充电中,耳机上的红灯熄灭时表示耳机充电已完成。 3.收纳盒给耳机充电:先放一个耳机到收纳盒,耳机上红灯常亮表示耳机正在充电中,再放另一个耳机到收纳盒,耳机上红灯常亮表示耳机正在充电中,耳机上的红灯熄灭时表示耳机充电已完成。 4.电量不足提示:收纳盒上的蓝灯闪烁时表示收纳盒上电量不足,请及时充电。 5.充电注意事项:如果收纳盒没有充电,请检查旅行充电器及转接线是否接好。直到收纳盒上的红灯会闪烁时表示收纳盒正在充电中,耳机没有充电时,请耳机对准收纳盒触点,重复几次,直到耳机上的红灯常亮表示耳机正在充电中。</div>	<div>帮助</div> <div>• 手机无法搜索到蓝牙耳机 可能原因:蓝牙耳机不在开机待搜索状态 解决方法:从充电盒中取出耳机,耳机自动开机。耳机有提示音。进入2个耳机的互相配对状态。 • 耳机只能接听电话域只能听歌 可能原因:耳机程序错误或者手机程序错误 解决方法:1.关闭蓝牙耳机,再重新开启; 2.关闭手机蓝牙,再重新打开; 3.手机重启后,将手机蓝牙耳机存储的所有配对资料清除,再重新进行配对连接 • 耳机没有声音 可能原因:1.蓝牙耳机音量或手机音量处于最低状态 2.蓝牙耳机与手机连接异常 3.蓝牙耳机不在有效工作范围之内 解决方法:1.调节手机上的媒体音量 2.蓝牙耳机与手机连接异常 3.保持耳机位于手机10米范围内使用,且中间无任何障碍物 • 声音效果不好 可能原因:手机信号弱 解决方法:换地区再尝试使用 • 充电灯不亮 可能原因:1.长时间未使用 2.耳机放反或耳机触点没接触到 解决方法:1.需要连上充电器充大约30分钟,红灯才会亮 2.重新摆放耳机至充电器触点</div>	<div>产品配件</div> <div>1.耳机 2.充电收纳盒 3.硅胶耳帽 4.充电线 5.使用说明书</div> <div>注意事项</div> <div>1.避免存放在极端高温或极端寒冷环境。 2.避免接触液体,极端温度和高湿度的环境中。 3.请不要使用暴力对待本产品,也不要用力挤压。 4.请不要将耳机与其他物品一起存放,可能会导致故障。 5.当不使用耳机时,请放在清洁干燥的环境中。 6.本产品可以与任何一款具有蓝牙功能的设备进行连接使用。</div>	<div>FCC声明</div> <div>本设备符合FCC第15部分的规定。FCC操作主要依据以下两个条件: 1.本设备不会产生有害的干扰。 2.此设备必须接收任何收到的干扰,包括可能导致意外操作的干扰。 警告:未经合格负责方明确批准的更改或修改可能会使用户无权操作设备 注意:本设备已经过测试,符合FCC规则第15部分对B类数字设备的限制,这些限制旨在提供合理的保护,防止在住宅使用过程中可能产生的有害干扰。该设备在使用的过程中可以辐射射频能量,如果不按照说明进行安装和使用,可能会对无线电通信产生有害干扰。但是无法保证在特定安装中不会发生干扰。如果此设备确实对无线电或电视接收产生有害干扰(可通过关闭和打开设备来验证),建议用户尝试通过以下一种或多种措施纠正干扰: 重新调整或摆放接收天线。 增加设备和接收器之间的距离。 将设备连接到不同于接收器所连接电路的电源插座。 请咨询经销商或有经验的无线电/电视技术人员以获取帮助。 射频警告声明:该设备已经过评估,符合一般射频暴露要求。该装置可以在不受限制的便携式曝光条件下使用。</div>
--	--	---	--	--	--	---	---

正面

<div>Product description</div> <div></div> <div>User Manual</div> <div>WB-259 True Wireless Bluetooth Earphone</div>		<div>Specification</div> <div>PARAMETER</div> <div>Speaker:Φ10*4.3 Rated Power: 3mW Maximum Power: 5mW S.P.L.: 99±3dB At 1000 Hz At 0.179 V L/R Variation: <3dB at1KHz 1mW Distortion: <3% at 1KHz 1mW Frequency Response: 20-20,000Hz Impedances: 32Ω±15% 1,000Hz Chipset:BES2000U Bluetooth version:4.2 Battery capacity:50mAh Charging time:1.5hours Music time:2hours(medium volume) Talking time:3 hours Standby time:60 Hours Bluetooth range:10meters Battery of Charging Box:300mAh Times for Charging pairbuds: about 3 times Bluetooth Profile:A2DP1.3, HFP1.5, AVRCP1.5</div>	<div>Instructions</div> <div>• Host: Right Earphone / WB-259R Secondary: Left Earphone WB-259L 1.Remove the earphones from the charging box, the earphones automatically turn on. Earphones have an audible prompt. Enter the mutual pairing status of 2 earphones. 2.After pairing, 2 earphones Left and right will have the warning tones: Left channel / Right channel, connected. The right earphone's light turns red and blue, and the secondary earphone turns blue and flashes slowly. 3.Turn on the Bluetooth on your phone, search for "WB-259R" Bluetooth name,click connect to complete pairing. 4.If earphones have been paired with the phone, it will automatically connect back to the phone when it is turned on; If the pairing is not successful, please turn off the Bluetooth, delete the Bluetooth pairing record of the phone, and repeat the above instructions. 5.Separate use of two earphones: touch the surface of the earphone, continue to press and hold the power button, until the red and blue lights flash alternately and then let go, turn on Bluetooth setting on your phone, search for the WB-259R / or WB-259L, to complete the pairing. 6.Voice switching: In the pairing mode (red and blue lights flash alternately), double-click the touch button to hear the tone of the language switching. • Using for TWS Earphone After Successful Pairing: 1. Pause / Play: when playing music, short press the touchbutton on the surface of the earphone to pause, press again to continue playing. 2. Call Answering: when there is a call incoming, short press the touch button on the surface of the earphone to answer. 3. Short Call: when there is a call in the phone, long press the touch button on the surface of the headset for 2 seconds to reject. 4.Power Off: Long press any the surface of the earphones (Left or Right), when red light flash, the warning tone prompts "PowerOff" the earphone enters power off state. 5.Previous song: Double-click the left earphone for the previous song 6. Next song: Double click on the right earphone for the next song.</div>	<div>Instructions</div> <div>• About Charging: 1.Charging The Box: using the 5V/300mA travel charger to charge he box,when the red light flashes,it indicates that the charging is in progress,when the red light is on means the charging is completed. 2.Charging The Box And Earphones At The Same Time: when earphones are placed in the charging box and it has connected with the 5V/300mA travel charger,earphones will also be charged at the same time. When the red light on the charging box flashes,means the box is charging. The red light on the two earphones indicates that the earphone is charging,when the red light on the earphone is off, means the charging is completed. 3.Charging Box Charging The Earphone: put earphones into the charging box, The red light on the headset is always on, indicating that the headset is charging. Then put another headset, the red light will always light, indicating that the headset is also charging, when the lights are off means the charging has been completed. 4.Charging Box Low Battery Prompt: When the blue light on the charging box is flashing, it indicates that the charging box is low battery need to be charged in time. 5.Charging Precautions:if the charging box is not charging, please check if the travel charger and the adapter cable are connected until the red light on the charging box will flash. When the earphone is not charging, please align the earphone with the charging points on the charging box, repeat it several times until the red light on the earphone and the blue light on the charging box is on.</div>	<div>Support</div> <div>• The mobile phone cannot search for Bluetooth earbuds The Possible Reason: Bluetooth earbuds is not ready to be searched Solution: Remove the earphones from the charging box, the earphones automatically turns on, Earphones have an audible prompt. Enter the mutual pairing status of 2 earphones. • Earbuds can only answer calls or only listen to songs The Possible Reason: program error for earbuds or program error for mobile phone Solution: 1. Turn off the Bluetooth earbuds and restart. 2. Turn off the phone Bluetooth and then turn it back on; 3. After the phone restarts, to delete all pairing data which stored in the bluetooth phone, and then re-pairing the connection. • No sound from earbuds The Possible Reason: 1. Bluetooth earbuds volume or phone volume is at its lowest state 2. Bluetooth earbuds and phone re-pairing 3. Keep the earphones within 10 meters of the mobile phone without any obstacles in the middle. The Possible Reason: 1. Not used for a long time 2. The earbuds are reversed or the headphone contacts are not touched Solution: 1. You need to connect the charger to charge for about 30 minutes, the red light will be on. 2. Reposition the earbuds to the charging</div>	<div>Product Accessories</div> <div>1.Earphone 2.Charging Storage Box 3.Silica Gel Ear Cap 4.Charging Cable 5.User Manual</div> <div>Cautions</div> <div>1.Avoid storage in environments of extreme high or cold temperatures. 2.Avoid exposure to liquids, extreme temperatures and high humidity environments. 3.Please do not use violence against this product, nor do you want to squeeze it with heavy objects. 4.Please do not store headphones with other items, which may cause pollution. 5.When you do not use headphones, put them in a clean and dry environment. 6.This product can be connected to any Bluetooth enabled devices.</div>	<div>FCC STATEMENT</div> <div>This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1)This device may not cause harmful interference. (2)This device must accept any interference received, including interference that may cause undesired operation. Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radiofrequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radiocommunications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: 1.Reorient or relocate the receiving antenna. 2.Increase the separation between the equipment and receiver. 3.Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. 4.Consult the dealer or an experienced radio/TV technician for help. RF warning statement: The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.</div>
--	--	--	--	--	--	--	---

反面