


Smart Wake-Up Light

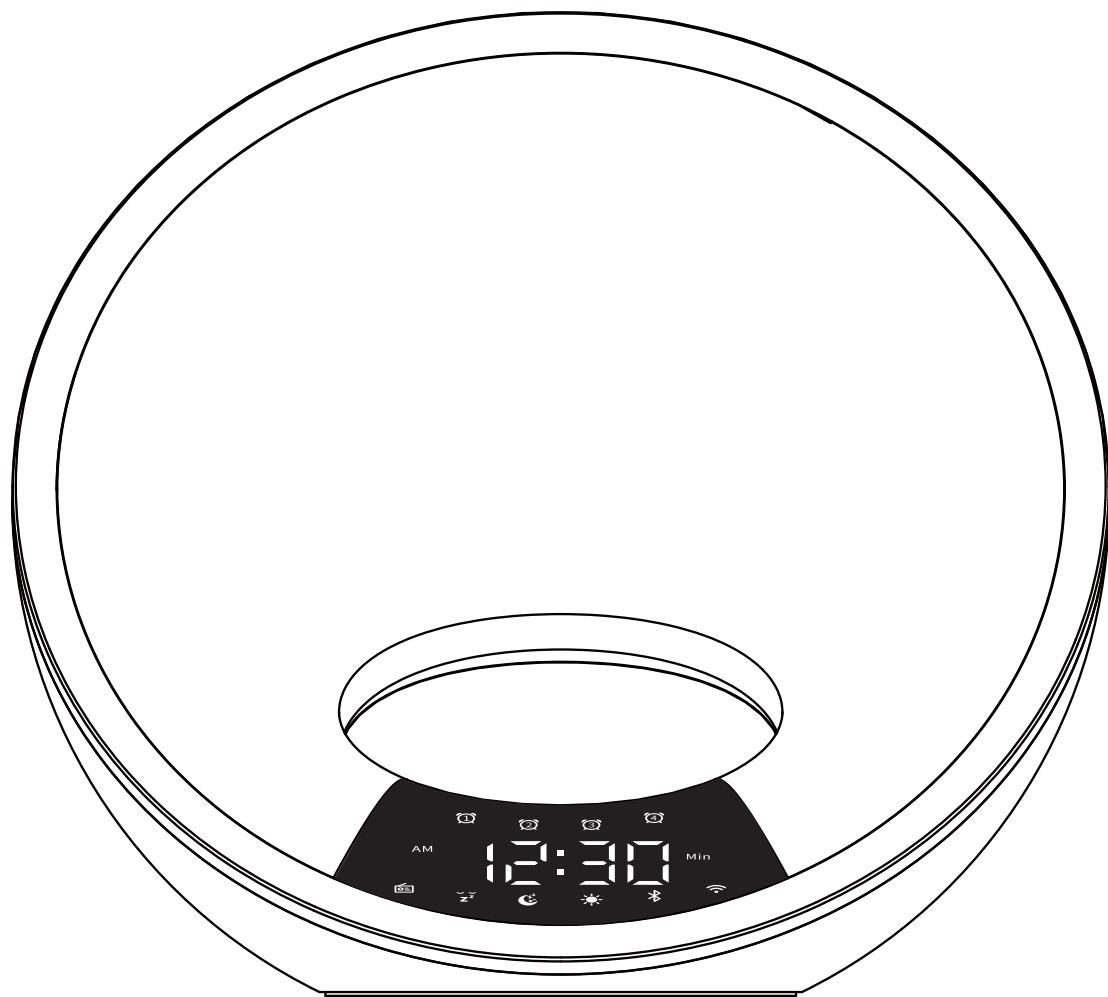

User Manual

SAFETY INSTRUCTIONS


To reduce the risk of fire, electric shock, or injury, please read these instructions before use.

1. This product is only intended for household use, including similar use in hotels.
2. Please place this product on a stable, level, and non-slippery surface.
3. Do not use this product in wet surroundings, such as in the bathroom, near a shower or a swimming pool.
4. Do not let the water run into the product or spill any water onto the product.
5. Make sure the power adapter does not get wet when in use.
6. Only use the ORIGINAL adapter and USB cable provided.
7. Do not use this product as a means of reducing your sleeping time. This product aims to help you wake more easily instead of diminishing your need for sleep.


MAINTENANCE AND CARE

1. Please clean the product with a dry and soft cloth.
2. Do not use abrasive cleaning agents, pads, or cleaning solvents like alcohol, acetone, etc., as this might damage the surface of the product.
3. If the product will not be used for an extended period of time, please unplug the power adapter from the socket, then store the product in a safe and dry place where it will not be crushed, banged, or subject to damage.


WHAT'S In The Box



Smart Wake Up Light




Adapter




User Manual

PRODUCT OVERVIEW

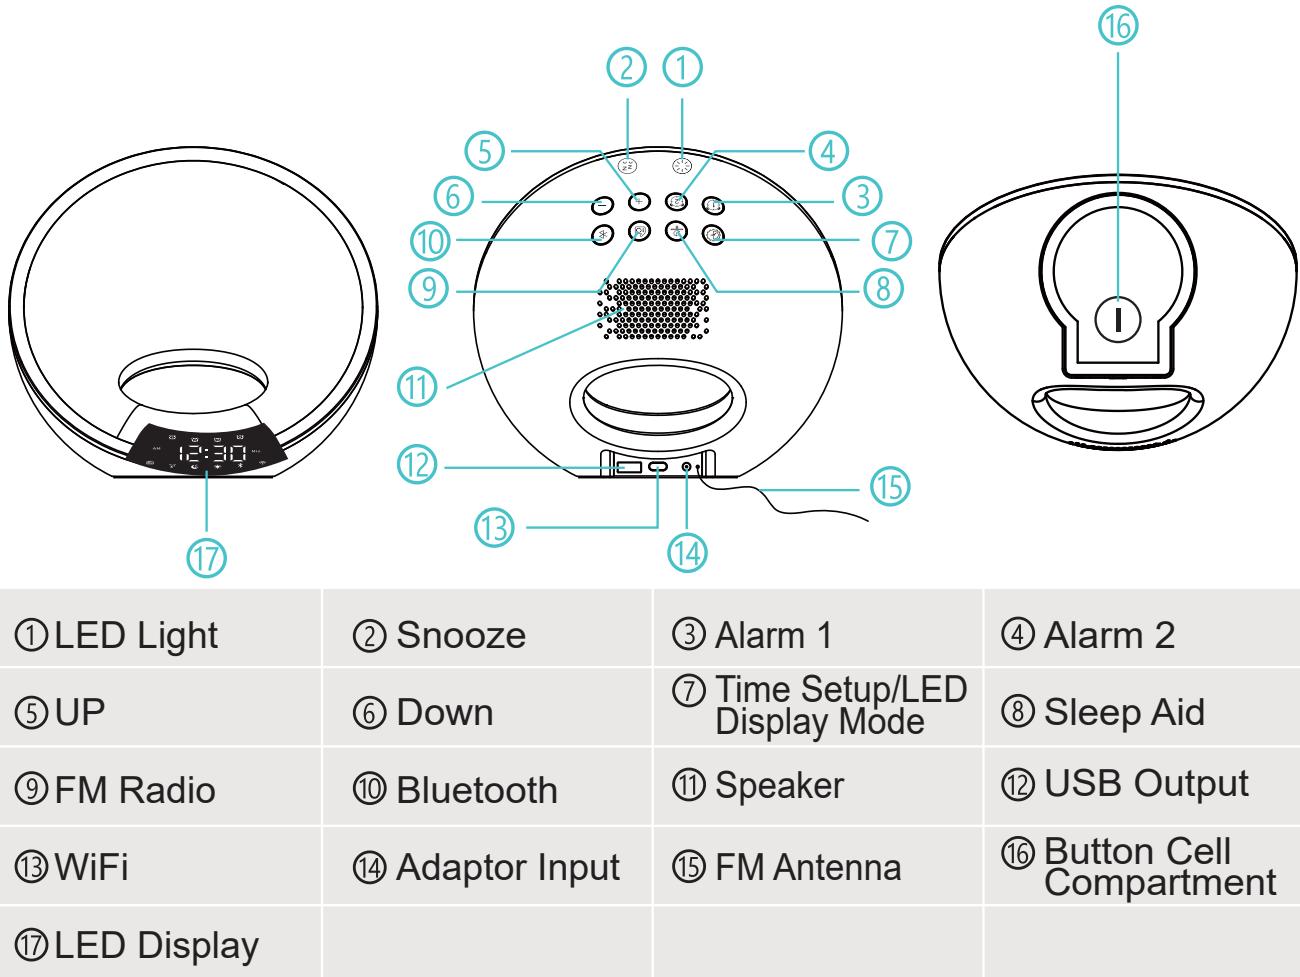

INSTALLATION & GETTING STARTED

Connect the Wake-up Light to power with the Adapter provided.

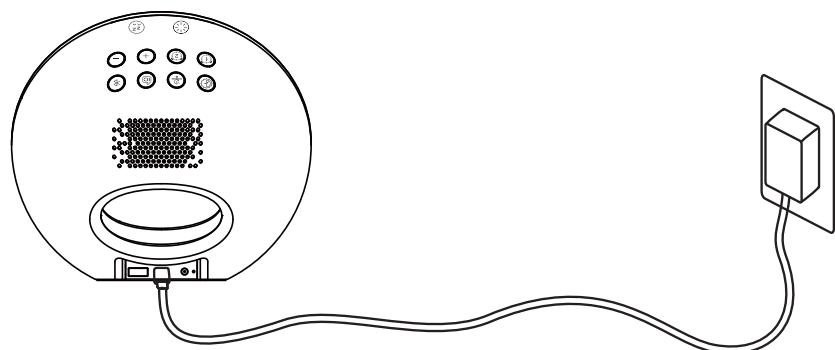

Important:

1. This product has no power on/off button, and it will be on once you plug the power adapter into the socket. To disconnect power, unplug the power adapter.
2. Loosen the tie that wraps the FM Antenna, then unroll the wire for receiving strong signals when turning on the FM Radio.

OPERATION GUIDE

Note:

The Wake-up Light will automatically save the current setting and exit from setting mode if the operation is not resumed within 15s.

Time

Before the first use, please set the time.

Step 1: Press and hold  for 2 seconds until the Hour starts to flash on the LED display.
Step 2: Press  to change the Hour, then press  to confirm and switch to Minute.
Step 3: Press  to change the Minute, then press  to confirm and switch to 12/24H.
Step 4: Press  to change 12/24H, then press  to confirm.

If the 12-hour clock format is selected, PM or AM will be displayed accordingly.

Brightness of the LED Display

Press  to toggle the brightness of the LED Display from 0% -10%-30%-50%-100%.

Alarms

You could set Alarm 1 and Alarm 2 with the wake-up light. Alarm 3 and Alarm 4 could be set in the app Smart Life. We will take setting Alarm 1 as an example to guide you how to set an alarm.

Step 1: Press  for 2 seconds until the icon and the Hour start to flash on the LED display.

Step2:Press \oplus/\ominus to change the Hour, then press $\textcircled{1}$ to confirm and switch to Minute.
Step3:Press \oplus/\ominus to change the Minute, then press $\textcircled{1}$ to confirm and switch to ringtone Setting.
Step4:Press \oplus/\ominus to select your favorite ringtone for Alarm 1, then press $\textcircled{1}$ to confirm Volume Setting

OFF: Ringtone off

S-01 to S-07:Nature sounds

F-08:The last FM station you were tuned to before turning off the radio. If you prefer another station, please turn on the FM radio to search and select the one you like, then set the alarm again.

Step5: Press \oplus/\ominus to adjust the ringtone volume,then press $\textcircled{1}$ to confirm and start the Sunrise.

U-01 to U-20: Volume levels

Step6: Press \oplus/\ominus to adjust the brightness level for the light, then press $\textcircled{1}$ to confirm and start setting the sunrise time to turn on the light before the alarm rings.

L-00: Light off

L-01 to L-20: Brightness levels

Step7: Press \oplus/\ominus to select the sunrise time from 10, 20, 30, 40, 50 and 60 MIN, then press $\textcircled{1}$ to confirm and complete all the settings for Alarm 1.Alarm 1 is on after setup.

If you select 10MIN and the alarm time is 7:00 AM, the light will be on at 6:50 AM and gradually become brighter.When the alarm rings at 7:00 AM, the brightness level of the light will reach the level you set at Step 6.

Snooze

When the alarm rings, press to activate Snooze Mode to delay the alarm for 9 minutes.

1. You can snooze up to 5 times.
2. Press the corresponding Alarm Button $\textcircled{1}/\textcircled{2}$ to manually stop the alarm.
- 3.If you don't respond to it within 15 minutes after the alarm rings, the alarm will automatically stop for this time.

FM Radio

Step1: Press  to ON/OFF

Step2: Press and hold  for 2 seconds, and wait for the wake-up light to automatically search FM stations. Available stations will be saved as P-01, P-02, etc., in sequence.

Step3: Press and hold  to switch among the stations saved.

Step4: Press  to adjust the volume.

U-01 to U-20: Volume levels

Note: Please fully unwind the antenna and move it around until you receive the best reception.

Bluetooth

Step1: Press and hold  for 2 seconds to turn on Bluetooth

Step2: Press  to pause the music.

Step3: press and hold  for 2 seconds to the next song

Step4: Press  to adjust the volume

U-01 to U-20: Volume levels

Notes:

1. Bluetooth On/Bluetooth Off is with Bluetooth switch prompt sound

2. If the device has been connected with other devices before, the Bluetooth will automatically open.

Sleep Aid

Sleep Aid simulates the process of sunset, aiming to help you fall asleep easily. After it's enabled, the sunset light will gradually dim, and the volume of the selected nature sound will decrease with time.

Step1: Press and hold  for 2 seconds, then press  to select a timer from 10 MIN to 120 MIN.

Step2: Press  to confirm your selection, then press  select your favorite sound to help you sleep.

OFF: sound off

s-01 to S-07: Nature sounds

F-08: The last FM station you were tuned to before turning off the radio. If you prefer another station, please turn on the FM radio to search and select the one you like, then set the alarm again.

Step3: Press  to confirm your selection, then press  to adjust the volume of the sound.

U-01 to U-20: Volume levels

Step6: Press  to confirm your selection, then press  to adjust the brightness level of the light.

L-01 to U-20: Brightness levels

Step7: Press  to confirm your selection and complete all the setting for Sleep Aid. Sleep Aid is enabled after setup.

Press  to disable Sleep Aid.

Light

Bedside Light

Step 1: Double press  to turn on the monochrome mode,

Step 2: Short Press  to manually change the color of the light one by one and 7 colors are available.

Step 3: Press and hold  to adjust the brightness level.

1% to 100%: Brightness levels

Atmosphere Light

Step 1: press and hold  for 2 seconds to turn on the atmosphere mode,

Step 2: Short Press  to manually change the color of the light one by one and 6 modes are available.

The eighth mod is MIC function, according the Bluetooth.


CONNECT TO YOUR MOBILE DEVICE

Step 1: Download Smart Life into your mobile device on App Store/Google Play, or scan the QR code below.



Android/IOS


Step 2: Create an account and log in.

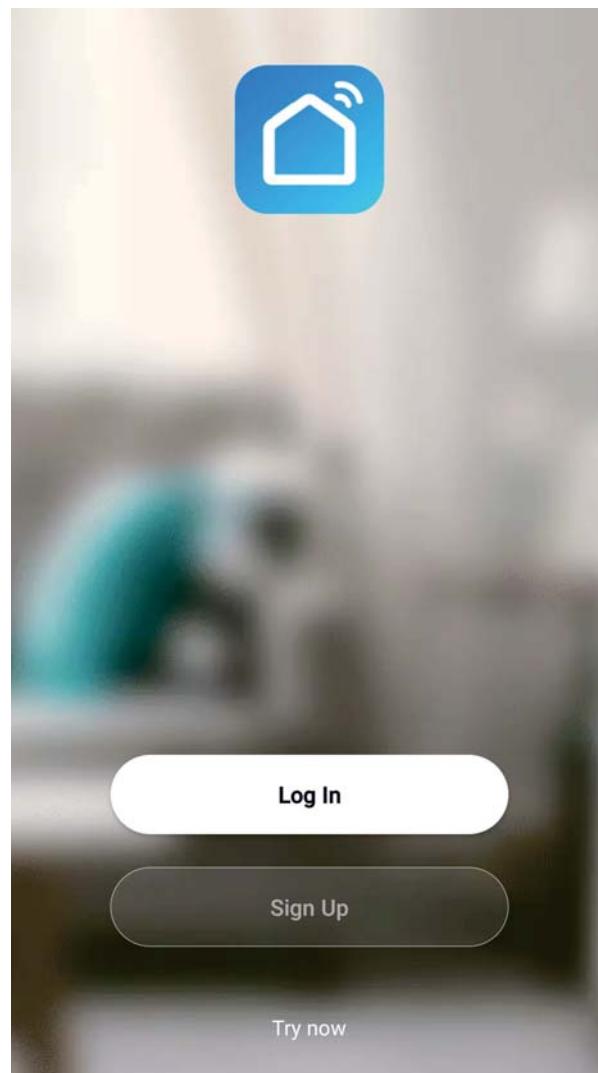


Step 3: Connect the Device to Your Phone

Please power on your wake-up light first, press and hold WiFi button for 15S the WiFi icon will flash quickly.


Step 1: Tap Add Device

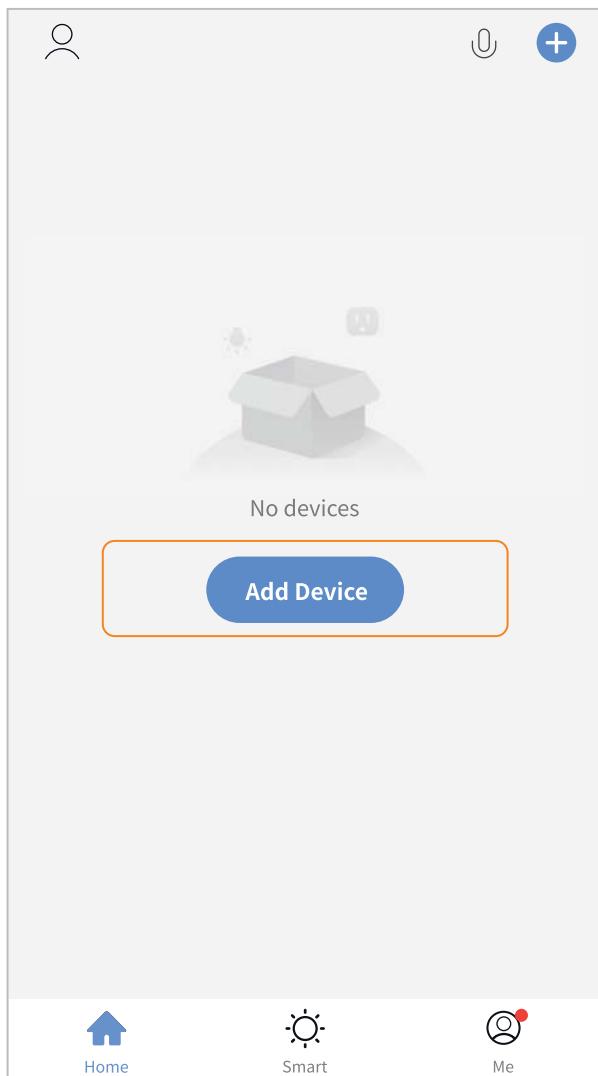


Step 2: Tap Auto Scan

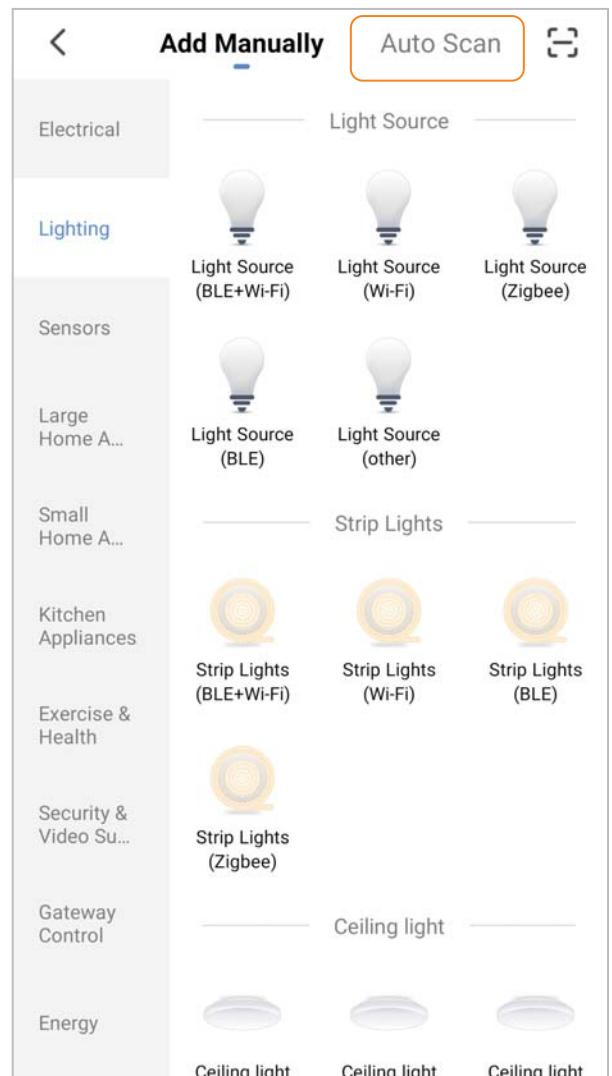


Step 3: Enable permissions for scanning devices, and tap Start scanning.

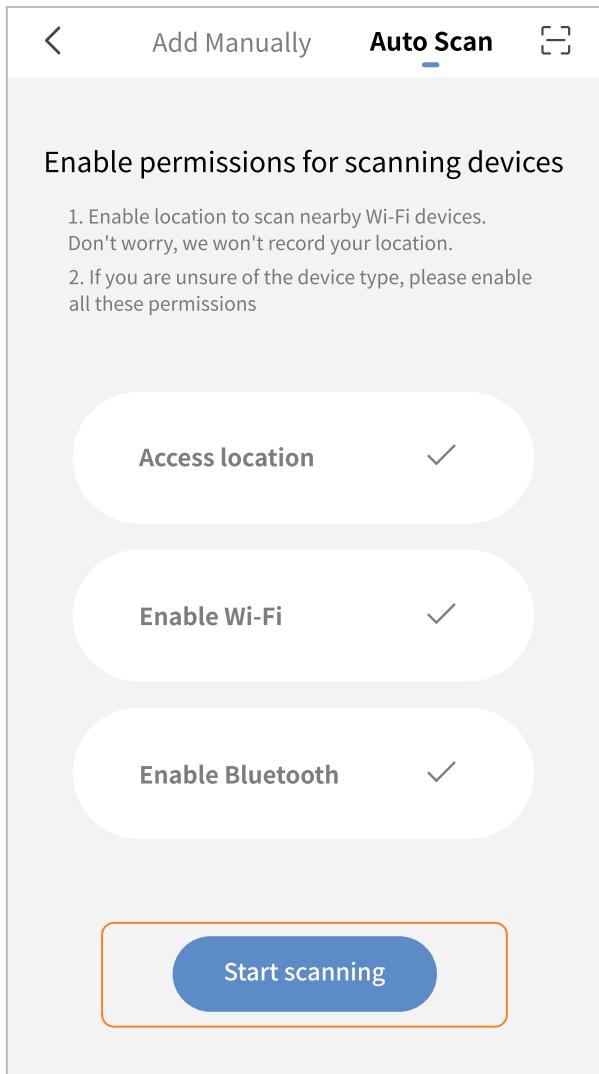


Step 4: Tap Next after your wake-up light is found.

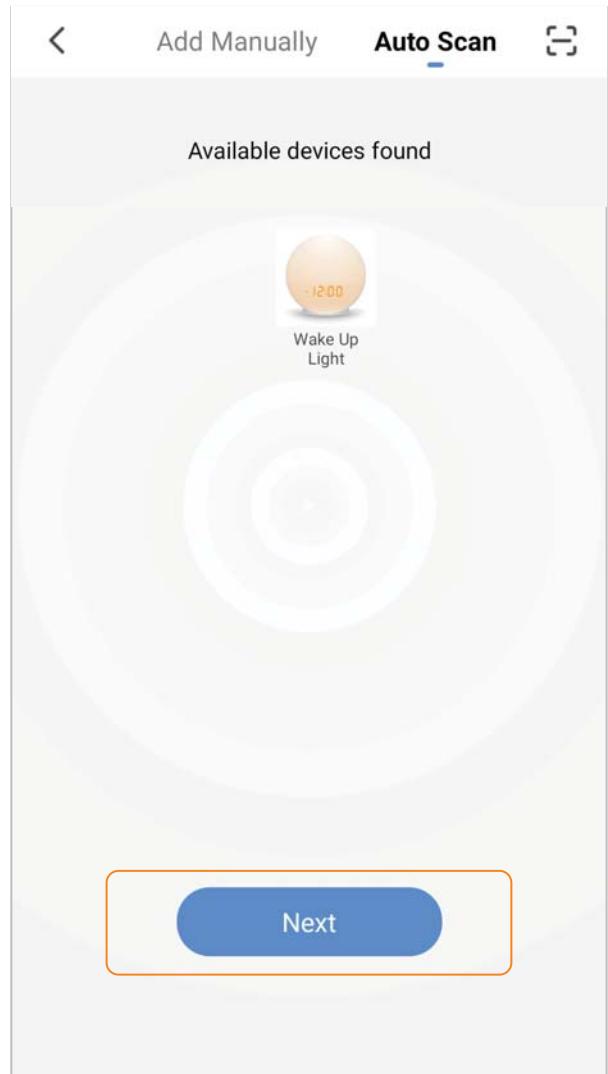


Step 5: Wait for connection.

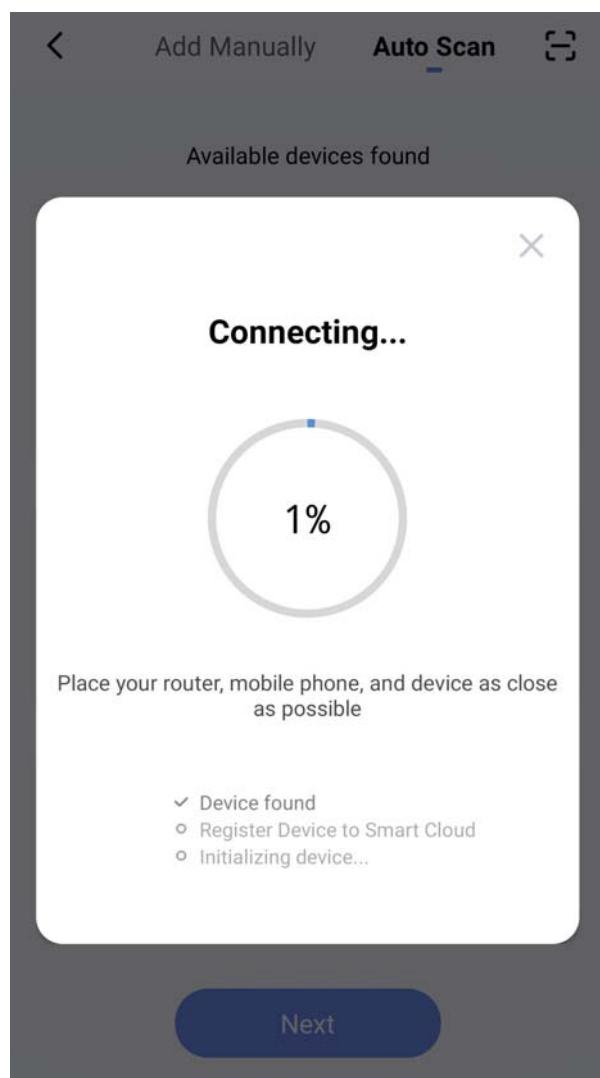


Step 6: Select your wifi and enter the correct password.

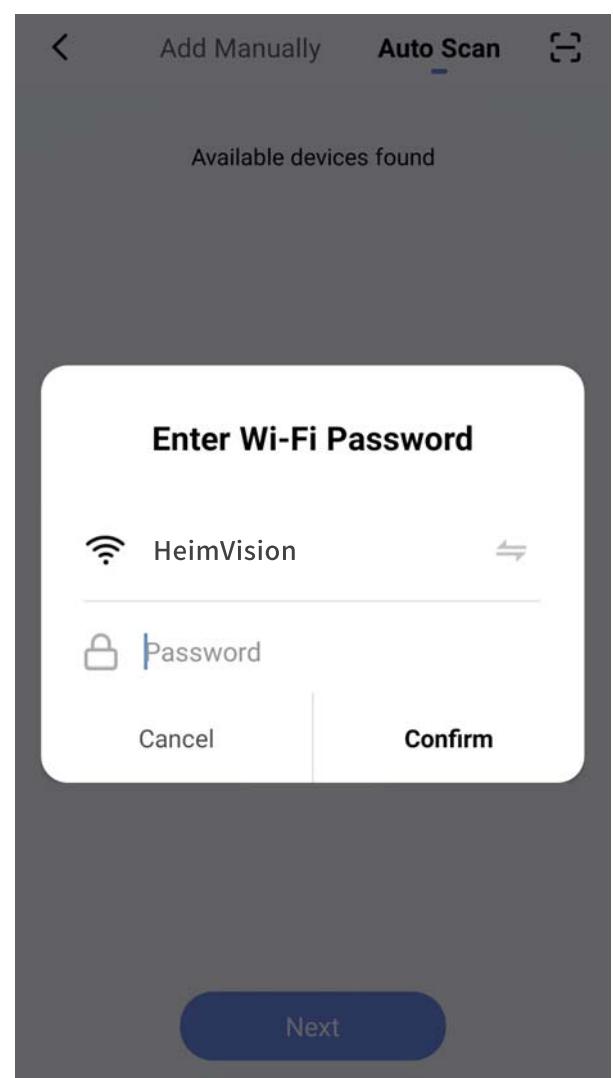

Step 7: Create a name for your wake-up light.

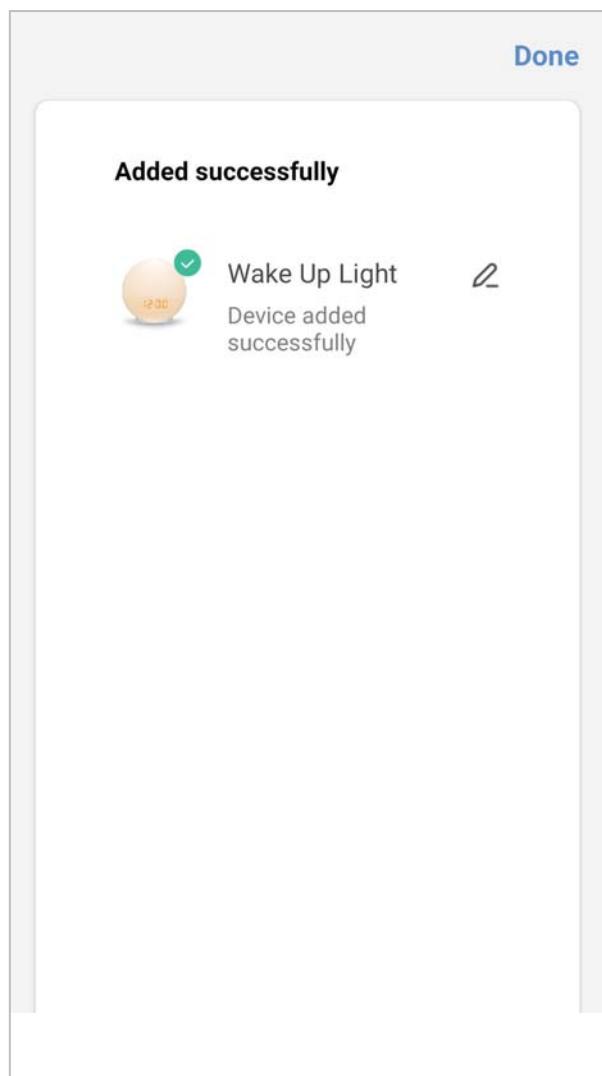

1. Ensure that Network Timing is ON. If it's off, the Repeat function of alarms is unavailable, and the alarm settings might not be accurate.
2. In this interface, you also can adjust Brightness of the LED Display.

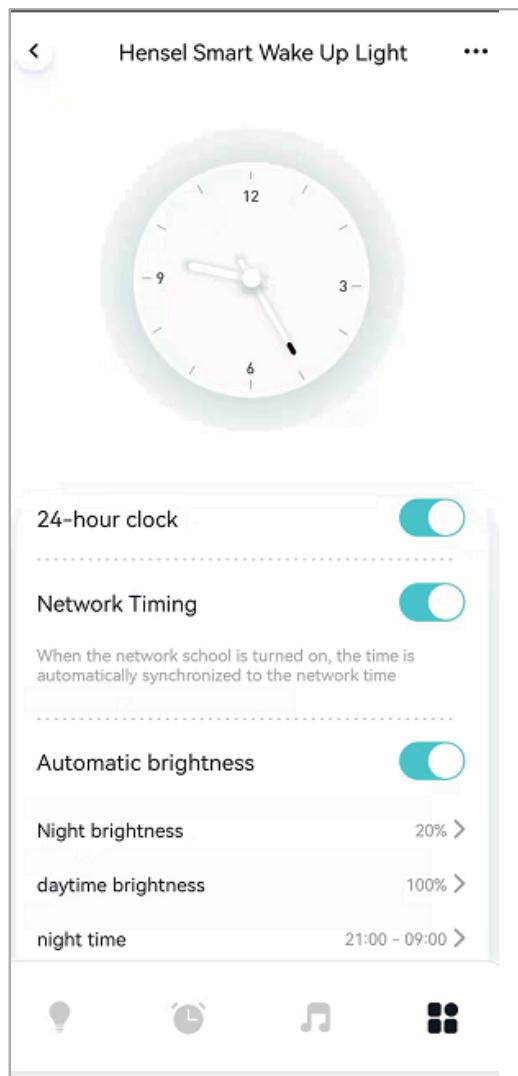

Q&A

This part summarizes the most common problems you could encounter with the Wake-Up Light. If you are unable to solve the problem with the information below, please feel free to contact xxx@xx.com for assistance.

Q1.The appliance does not work at all.

* Perhaps the adapter is not inserted properly in the wall outlet.Plug the adapter properly in the wall outlet.* Perhaps there is a power failure.Check if the power supply works by connecting another appliance.

Q2.What should I do when I cannot link the Wake-Up Light with the Smart Life App?

* Check if the Wake-Up Light is powered on.

* Make sure your mobile device is connected to the 2.4GHz WiFi Network.

*Make sure the password of your WiFi network entered in Smart Life App is correct when linking Wake-Up Light.

*Make sure the Wake-Up Light is ready for linking: the WiFi indicator flashes quickly. If not, please press the Snooze button (about 10 seconds)until the WiFi indicator begins to flashes rapidly.

Q3.Why did I fail to set the alarm clock to ring only on weekdays?

* Please turn on the Network auto-time in the setting interface of Smart Life App, then you can set the alarm clock according to your needs.

Q4.The radio produces a crackling sound.

* Perhaps the broadcast signal is weak, please fully unwind antenna and move it around until you receive the best reception.

Q5.How can I set the alarm 3 and alarm 4?

* Alarm 3& Alarm 4 can only be set on Smart Life App.

FCC Compliance

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference,

(2) This device must accept any interference received , including interference that may cause undesired operation.

The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications or change to this equipment . Such modifications or change could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

RF Warning Statements:

To maintain compliance with FCC's RF exposure guidelines, this equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.

