



# CHEETAH TRANSLATOR



Cheetah Translator — Getting Started




# Cheetah Translator — Getting Started

## Product Overview

**Power On/Off:** The device has an ultra-long standby time. With the auto-sleep feature, you do not have to constantly turn it on and off. (You can set how long it takes for the device to go to sleep when you are not using it in the app.)

**Volume Controls:** The volume controls are on the left of the Translate button. You can tap the

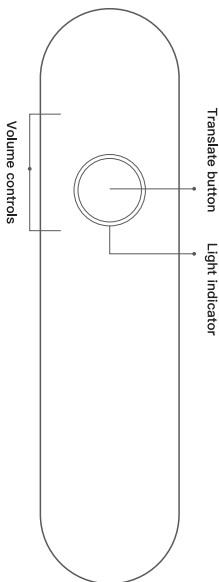

Front


area and slide your finger up/down to increase/decrease the volume. The beep volume is the volume of the device.

**Translate Button:** The Translate button is the only button on the device. You can press or long press the button to activate different functions. To translate, long press the button while speaking, and release it when done

(Please make sure the device is paired to your mobile phone). Cheetah Translator will automatically identify the language and translate the speech. You can press the button to replay the translated speech within 30 seconds after the translation.

**Light Indicator:** The Translate button is surrounded by a circle of white light indicator. The indicator lights up when you press the Translate button and goes off when you release it. The light indicator flashes during charging and goes off when charging is complete. You can disable the charging light indicator in the app.

**Charging Port:** The device is equipped with a

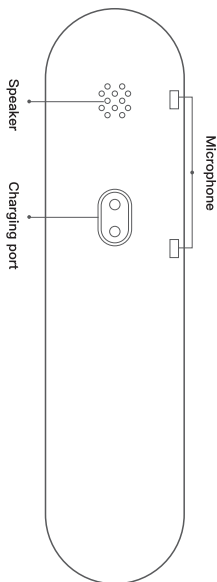

Back

magnetic charging port. Connect the charging cable to charge the device.

**Reminder:** The magnetic charging port attracts the charging cable when the two make contact. Do not press down the charging cable against the magnetic force to avoid damaging the device.



## Note

- Cheetah Translator is empowered by cloud technology, and has to be paired with the mobile app with Internet connection.
- Do not cover or block the microphone or speaker to ensure the best voice pickup and sound quality.
- For the optimal user experience, avoid using the device in a noisy environment, and make sure that the speaker is within one meter from the microphone.
- The device currently supports two-way translation for Chinese and English, Chinese and Japanese, Chinese and Korean, Chinese and Thai, and Chinese and Spanish. Support for more languages is under development and will be available by online updates. Translation for some languages are paid features. Please refer to the app for details.

## Product Settings

### 1. Install the mobile app

Search for "Cheetah Translator" in the app stores, or scan the following QR code to download and install "Cheetah Translator".

### 2. Pair with your phone

Open the "Cheetah Translator" app and log in according to the instructions shown in the app. Once logged in, long press the Translate button as prompted by the app to pair the device with your phone. The device will beep when your phone has been connected successfully.

### 3. Translate

Once successfully paired the Translator with your phone, long press the Translate button, and speak after the beep. Release the button to proceed with the automatic voice recognition and translation.

Note: The device provides Chinese and English two-way translation by default. Configure the device for translation between other languages in the app.

### 4. Record

Once successfully paired the Translator with your phone, turn on the "Recorder mode" in the app. Press the Translate button on the device or the record button on your phone to start/end a recording.

(QR code to download the app)



## Product Specifications

**Wireless connection:** Bluetooth BLE4.0

Adapter: 5V/500mA

Weight: 45g

Dimensions: 136mm (length) \* 35mm (width) \*

9mm (thickness)

**Device requirements:** Bluetooth BLE4.0 or above, Android phone with Android 4.4 or above; iPhone 5S and later with iOS 9.0 or above.

## FCC Warning Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## Troubleshooting

### The product does not start up

- Check whether the battery has been drained.
- The product won't translate or translates slowly**
- Check whether your phone is connected to the Internet.
  - Check the network connection quality of your phone.
  - Check whether the device is within the effective Bluetooth signal range of your phone. (Bluetooth signals are effective within a radius of 10 meters in an open area, which is reduced correspondingly when obstructions are present.)
- The translation is inaccurate**
- Check whether the microphone is covered or blocked.
  - Check whether the sound source is too far from the microphone.
  - Check whether the speech for translation is pronounced properly.
  - Check whether the environment is too noisy.

### The device cannot be charged normally

- Check whether the charging cable is connected normally.
- Check whether the charging cable is damaged.
- Check whether the power adapter is working normally.