

Bluetooth Antenna specification&Test report


Yichip Microelectronics ©2014

| Test Ccompany | TA Technology (Shanghai) Co., Ltd. | | |
|------------------|--|--|--|
| Test Address | Building 1, No. 400, Fangchun Road, China (Shanghai) Pilot Free Trade Zone | | |
| Test Date | 2020/7/24 | | |
| Test Instrument | Keysight E5071B | | |
| Antenna Model | / | | |
| Max.Antenna Gain | 2.58dBi | | |
| Manufacturer | Yichip | | |
| Address | Room 501,5th floor, Block A, block 1, No. 57, Dao Jiang er road, Changhe Street, Binjiang District, Hangzhou City, Zhejiang province | | |

antenna design specification

Antenna dimensions as blow picture show: the material is FR4 and the thickness is 1.6mm of PCB.


ANT:

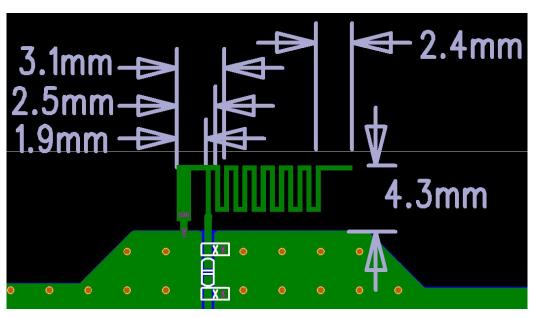


Gian and Efficiency


| Frequency (MHz) | Efficiency(%) | Gain(dBi) |
|--------------------|---------------|-----------|
| 2300 | 34.81 | -0.14 |
| 2320 | 38.90 | 0.50 |
| 2340 | 38.95 | 1.16 |
| 2360 | 40.11 | 1.28 |
| 2380 | 39.28 | 1.80 |
| 2400 | 41.77 | 2.20 |
| 2420 | 49.71 | 2.34 |
| 2440 | 50.23 | 2.58 |
| 2460 | 45.91 | 2.45 |
| 2480 | 42.46 | 2.09 |
| 2500 | 41.10 | 2.01 |
| 2520 | 35.58 | 0.96 |
| 2540 | 32.43 | 0.44 |

3D and 1D Radiation Patterns

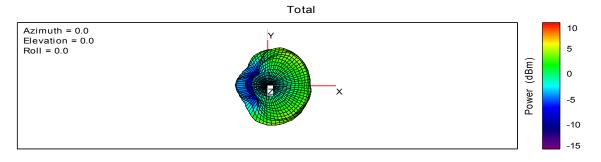


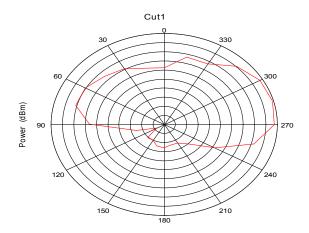

Max: 5 Min: -5 Scale: 1/div

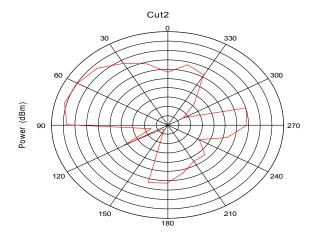

Max: 4 Min: -16 Scale: 2/div

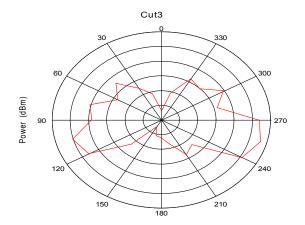

Max: 6 Min: -6 Scale: 2/div