

AUKEY

User Manual  
True Wireless Earbuds

Model: EP-T32

Aukey Technology Co., Ltd.  
www.aukey.com | support@aukey.com  
Building P09, South China City Electronics Trading Center,  
Longgang District, Shenzhen, Guangdong, 518111, China  
FCC ID: 2ATIH-EPT32R FCC ID: 2ATIH-EPT32L



Contents

English ----- 01~10  
Deutsch ----- 11~20  
Français ----- 21~30  
Español ----- 31~40  
Italiano ----- 41~50  
日本語 ----- 51~58


材质: 105g 铜版纸  
尺寸: 85\*85mm  
风琴折页 (双面印刷)  
印刷颜色: 单黑  
封面背面留白

Thank you for purchasing the AUKEY EP-T32 True Wireless Earbuds. Please read this user manual carefully and keep it for future reference. If you need any assistance, please contact our support team with your product model number and Amazon order number.

Package Contents

- True Wireless Earbuds
- Charging Case
- Three Pairs of Ear-Tips (S/M/L)
- USB-A to C Cable
- User Manual
- Quick Start Guide
- Warranty Card

Product Diagram

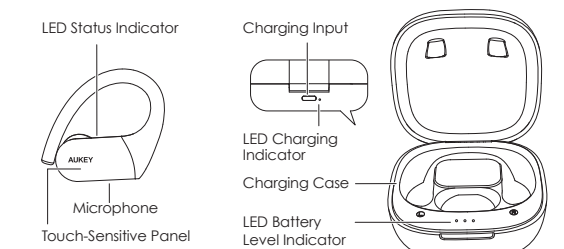

Specifications  
Earbuds

Table with 2 columns: Specification and Value. Includes Model (EP-T32), Technology (A2DP, AVRCP, HFP, HSP, SBC, AAC, APTX), Driver (1 x 12mm / 0.36" speaker driver), Sensitivity (95±3dB @1KHz), Frequency Range (20Hz - 20kHz), Impedance (32Ω±15%), Microphone Type (MEMS (microphone chip)), Charging Time (2 hours), Battery Life (9 hours), Battery Type (Li-polymer (2 x 55mAh)), Operating Range (10m / 33ft), Weight (7g / 0.25oz (pair)).


Charging Case

Table with 2 columns: Specification and Value. Includes Charging Input (DC 5V), Charging Time (3 hours), Battery Type (Li-polymer (600mAh)), Number of Earbuds Recharges (4 times (pair)), Weight (86g / 3.03oz).

Getting Started  
Charging

Fully charge the charging case before the first use. To charge, connect the case to a USB charger or charging port with the included USB-A to C cable, or use a wireless charger (SW) to charge the charging case. When the LED Charging indicator on the outside of the case turns off, the case is fully charged. Charging may take around 3 hours, then case can offer fully charge to the earbuds 4 times. The earbuds should be used in the case when not in use.

Note: Remove the protective film from the earbuds when using for the first time.

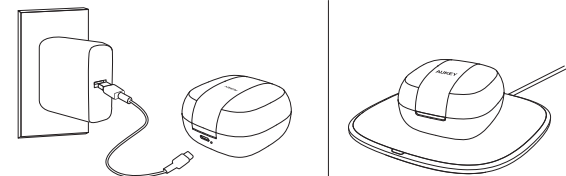

Turning On / Off

Table with 2 columns: Action and Description. Turn On: Open the lid of the charging case or touch and hold on the touch-sensitive panels on both earbuds for 2 seconds when they are turned off. Turn Off: Return both earbuds to the charging case and close the lid or touch and hold on the touch-sensitive panels on both earbuds for 5 seconds when they are turned on.

Pairing

- Starting with the earbuds in the case:
- 1. Open the lid of charging case, both earbuds will turn on, and enter pairing mode
- 2. Turn on the pairing function via BT on the device you want to pair with the earbuds
- 3. From the list of available devices and select "AUKEY EP-T32"

Note

Some devices don't follow the Qualcomm True Wireless Master-Slave pairing protocol and may display a message that "The connection was not successful." However, this won't affect the use

Regular Use After Pairing

Once the earbuds are successfully paired with your device, they can be switched on and off as follows:

- Open the lid of the charging case, then both earbuds will turn on and connect with each other automatically
- To turn off, put the earbuds back in the charging case and close the lid. They will begin charging

Using the Left/Right Earbuds

- Starting with the earbuds in the case:
- 1. Take the left/right earbud out
- 2. Turn on the pairing function on the device you want to pair with the earbud
- 3. From the list of available devices, find and select "AUKEY EP-T32"

Notes

- When you turn on the earbuds, they will be automatically reconnected to the previous-paired device or enter pairing mode if no paired device is found
- Either left or right earbud can be used individually once connected to your device when you keep the other one inside the charging case
- The wireless operating range is 10m (33ft). If you exceed this range, the earbuds will lose connection with your paired device. The connection will be re-established if you re-enter the wireless range within 5 minutes. Or the earbuds will be switched off automatically after 5 minutes

Reset the earbuds

1. Take both earbuds out of the charging case, and the earbuds will turn on. Touch and hold on the touch-sensitive panels on both earbuds for 5 seconds to turn them back off
2. Touch and hold on the touch-sensitive panels on both earbuds for 15 seconds. The earbuds will turn on, clear their pairing list, and turn off again
3. Put both earbuds back in the charging case and close the lid to reset
4. Open the lid again, and both earbuds will turn on and enter pairing mode

Controls & LED Indicators  
Streaming Audio

Once paired, you can wirelessly stream audio on your device via earbuds. Music will automatically get paused when you receive an incoming phone call and will be resumed once the call ends.

Table with 2 columns: Action and Description. Play or pause music: Tap the touch-sensitive panel on either earbud or remove either earbud from the ear. Skip to previous track: Double tap the touch-sensitive panel on the left earbud. Skip to next track: Double tap the touch-sensitive panel on the right earbud.

Taking Calls

Table with 2 columns: Action and Description. Answer or end a call: Double-tap the touch-sensitive panel on either earbud to answer or end a call regarding an incoming call. Reject an incoming call: Long-press the touch-sensitive panel on either earbud for 2 seconds. Activate Siri or other voice assistants: Triple-tap the touch-sensitive panel on either earbud.

Table with 2 columns: LED Charging Indicator and Status. Flashing Red: Charging Case being charged. Off (after charging): Charging Case fully charged.

Table with 2 columns: LED Battery Level Indicator and Status. Three LED indicators lights for 30 seconds: 60%-100% battery remaining. Two LED indicators lights for 30 seconds: 20%-60% battery remaining. One LED indicators lights for 30 seconds: <20% battery remaining.

FAQ

The earbuds are on, but not connecting to my device. For the earbuds and your device to establish a connection, you need to put them both in pairing mode. Please follow the instructions in the Pairing section of this manual.

I've connected the earbuds with my smartphone but can't hear any sound. Double-check the volume level on your smartphone and the earbuds. Some smartphones require you to set up the earbuds as an audio output device before the audio can be transmitted. If you're using a music player or other device, please make sure it supports the A2DP profile.

The sound isn't very clear or the caller can't hear my voice clearly. Adjust the volume on your smartphone and the earbuds. Try moving closer to your smartphone to rule out the possibility of interference or wireless range-related issues.

What's the wireless range of the earbuds? The maximum range is 10m (33ft). However, the actual range depends on environmental factors. For optimal performance, keep your device connected within a range of roughly 4m to 8m and make sure that there are no major obstacles (like reinforced steel walls) between the earbuds and your device.

The earbuds won't turn on. Try charging the earbuds for a while. If the earbuds still won't power on, please contact our support team at the email address given in 'Warranty & Customer Support.'

I put the earbuds back in the charging case, but the earbuds are still connected. The charging case is probably out of power. Try charging it.

Product Care & Use

- Keep away from liquids and extreme heat
- Don't use the earbuds at high volume for extended periods, as this may cause permanent hearing damage or loss

Warranty & Customer Support

For questions, support, or warranty claims, contact us at the address below that corresponds with your region. Please include your Amazon order number and product model number.

- Amazon US orders: support.us@aukey.com
- Amazon EU orders: support.eu@aukey.com
- Amazon CA orders: support.ca@aukey.com
- Amazon JP orders: support.jp@aukey.com

\*Please note, AUKEY can only provide after sales service for products purchased directly from AUKEY. If you have purchased from a different seller, please contact them directly for service or warranty issues.

CE Statement

Max RF power level: BT classic (2402-2480MHz): 2.1dBm. RF exposure assessment has been performed to prove that this unit will not generate the harmful EM emission above the reference level as specified in EC Council Recommendation (1999/519/EC).

CAUTION: RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.

Excessive sound pressure from earphones and headphones can cause hearing loss.



Hereby, Aukey Technology Co., Ltd. declares that the radio equipment type [True Wireless Earbuds, EP-T32] is in compliance with Directive 2014/53/EU.



Notice: This device may be used in each member state of the EU.

IC STATEMENT

This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions: (1) This device may not cause interference; and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

FCC Statement:

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: 1) this device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try correct the interference by one or more of the following measures:

- Reorient the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.