

Somat

SMART

ALL-IN-1

AUTOMATISCHES
GESCHIRRPÜLER-DOSIERGERÄT
AUTOMATICALLY DOSING
DISHWASHING DEVICE



BEDIENUNGSANLEITUNG OPERATION MANUAL

Henkel

DACH_SOM_DWC_IL_Smart_Starter_Refill_Kit_0220.indd 1

11.03.20 12:42

GENERAL DATA	APPROVAL DATA	PHONE	Printing material:
DIE CUT / SIZE (mm) 458 x 197 mm	Responsible person marketing Ekaterina Cherneyko	+49 211 797 9804	<input checked="" type="checkbox"/> white <input type="checkbox"/> transparent <input type="checkbox"/> silver <input type="checkbox"/> direct printing
IDH no. xxxxxxx	Date of approval by marketing xx.xx.2020		Packaging colour: -
Material no. xxxxxxx	Responsible person IPD N. N.	+49 211 797 xxxx	Basic Pack. Mat. No.: -
Product Somat DWC IL	Responsible person country N. N.	+49 211 797 xxxx	Mailing list: HOME / LAUNDRY
Country DACH	Date of 1. approval xx.xx.2020		USED PANTONE TONES ARE JUST INDICATORS!
Status correction	Date of 2. approval xx.xx.2020		Colors Printing process Colors Printing process
Creation date 27.02.2020	Delivered by PG MR AD	HOME	<input type="checkbox"/> cyan <input type="checkbox"/>
Correction date 11.03.2020	Responsible person LSD Jennifer Zobel	+49 211 74849 471	<input type="checkbox"/> magenta <input type="checkbox"/>
EAN (please check) -	Printing company Xxxx		<input type="checkbox"/> yellow <input type="checkbox"/>
EAN size -	LSD job no. L-P-003738		<input type="checkbox"/> black <input type="checkbox"/>
Short Code . -	LSD FILE NAME:		<input type="checkbox"/> varnish gloss
SEAL ID 30174893	DACH_SOM_DWC_IL_Smart_Starter_Refill_Kit_0220.indd		<input type="checkbox"/> printing area (does not print)
SEAL ID CS XXXXXXXX	INFOS: -		<input type="checkbox"/> die cut (does not print)
LOGO OF PRINTING COMPANY	TO BE COMPLETED BY PRINTING COMPANY		These files have been set up without trapping parameters or any other print options. Please adapt the data according to your usual guidelines and/or profiles.
	corrections <input type="checkbox"/> yes* <input type="checkbox"/> none		LSD LSD GmbH & Co. KG In der Steele 11-13 40599 Düsseldorf Tel. +49 211 74 84 90 Fax +49 211 74 84 94 10
	* if yes please do provide a detailed description of all changes made		Kind regards, LSD GmbH & Co. KG
			5 cm

Lieber Kunde,

wir freuen uns sehr über Ihr Interesse an unserer neuesten Henkel-Innovation in der Welt des intelligenten Geschirrspülers und dass Sie sich für unser Produkt entschieden haben.

Unsere Teams haben mit großem Engagement und viel Leidenschaft an der Produktentwicklung gearbeitet, um sicherzustellen, dass Ihre tägliche Geschirrspülroutine zu einem einfacheren, leistungsfähigeren und angenehmeren Teil Ihres Lebens wird.

Wir hoffen, dass Sie das Produkt genauso lieben wie wir und jeden Moment seiner Verwendung genießen.

Blieben Sie auf dem Laufenden und bleiben Sie mit unserer Somat Smart App in Verbindung.

Herzlichst,
Ihr Somat Smart Team Düsseldorf


Dear customer,

we are very pleased about your interest in our latest Henkel innovation in the world of smart dish washing and are happy that you chose our product.

Our teams worked with big dedication and passion on the product development to make sure that your everyday dish washing routine becomes an easier, more performing and more enjoyable part of your life. We truly hope, that you will love the product as much as we do and enjoy every moment of its usage.


Stay tuned and connected with our Somat Smart App.

Sincerely yours,
Somat Smart team Duesseldorf

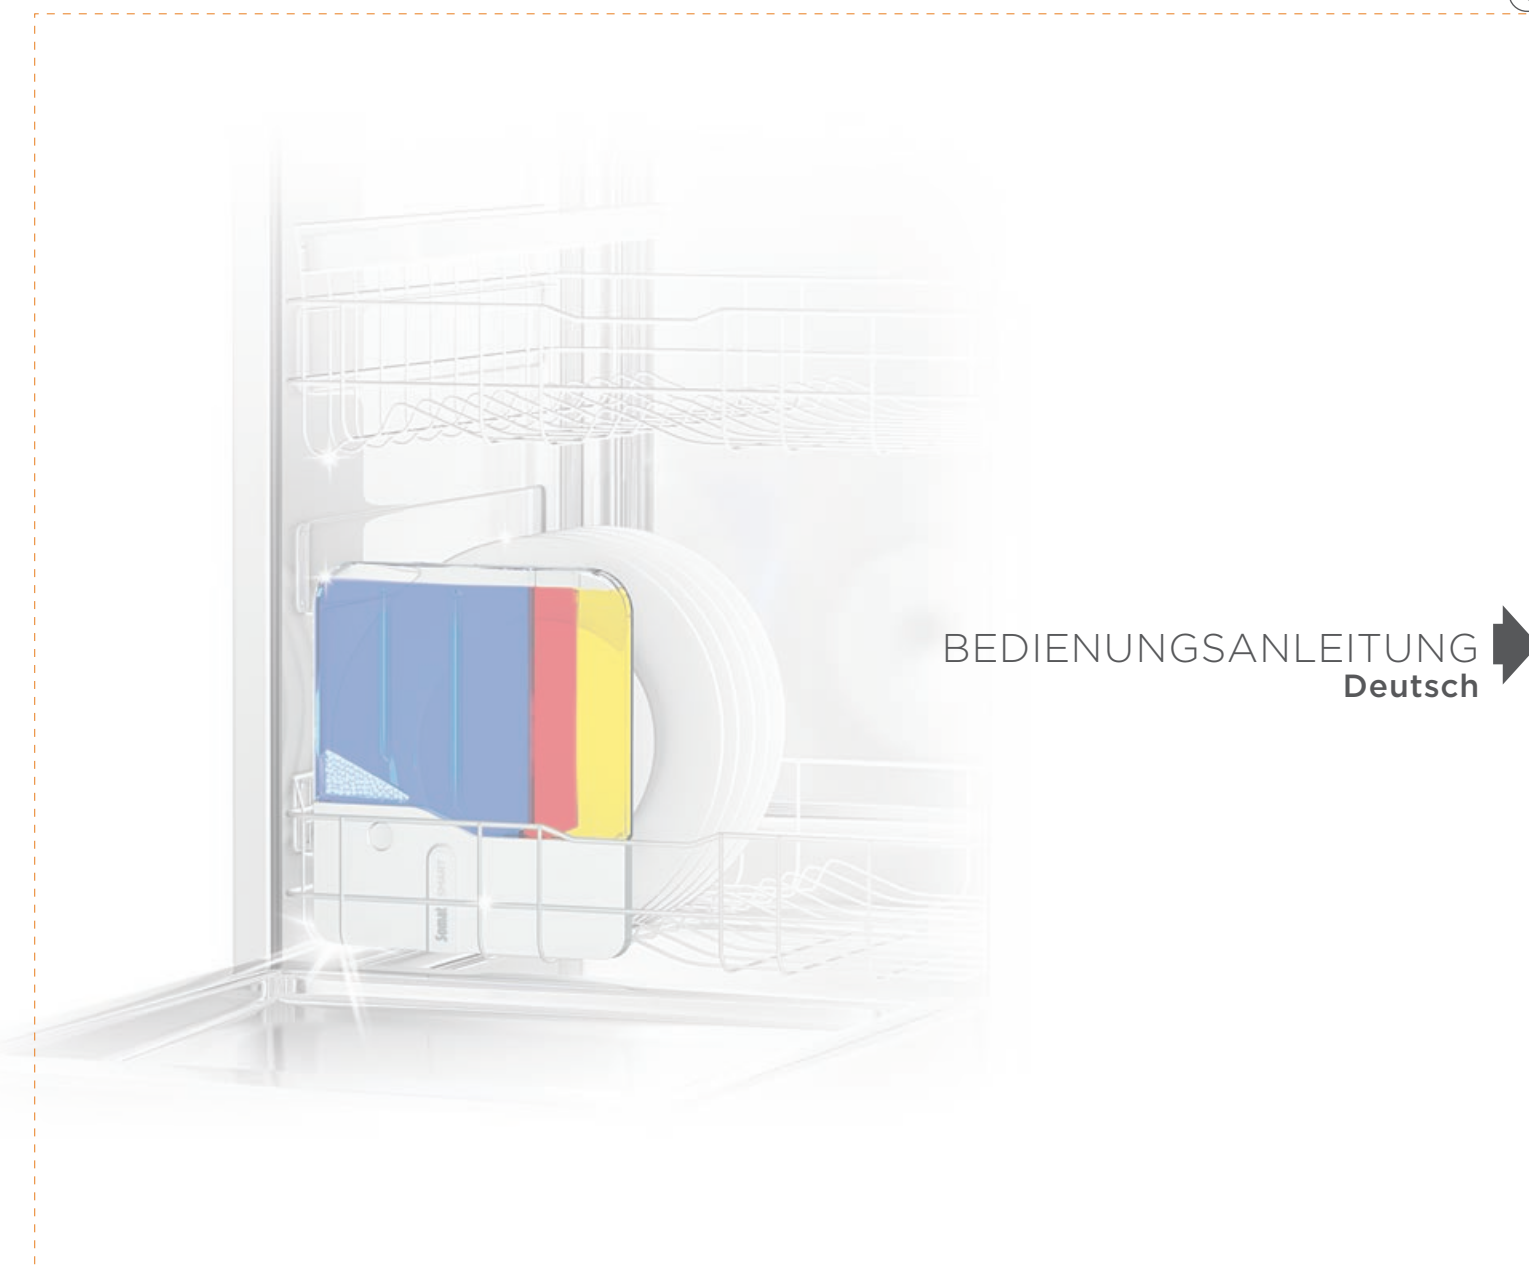

GENERAL DATA	APPROVAL DATA	PHONE	Printing material:
DIE CUT / SIZE (mm) 458 x 197 mm	Responsible person marketing Ekaterina Cherneyko	+49 211 797 9804	<input checked="" type="checkbox"/> white <input type="checkbox"/> transparent <input type="checkbox"/> silver <input type="checkbox"/> direct printing
IDH no. xxxxxxx	Date of approval by marketing xx.xx.2020		Packaging colour: -
Material no. xxxxxxx	Responsible person IPD N. N.	+49 211 797 xxxx	Basic Pack. Mat. No.: -
Product Somat DWC IL	Responsible person country N. N.	+49 211 797 xxxx	Mailing list: HOME / LAUNDRY
Country DACH	Date of 1. approval xx.xx.2020		USED PANTONE TONES ARE JUST INDICATORS!
Status correction	Date of 2. approval xx.xx.2020		Colors Printing process Colors Printing process
Creation date 27.02.2020	Delivered by PG MR AD	HOME	<input type="checkbox"/> cyan <input type="checkbox"/>
Correction date 11.03.2020	Responsible person LSD Jennifer Zobel	+49 211 74849 471	<input type="checkbox"/> magenta <input type="checkbox"/>
EAN (please check) -	Printing company Xxxx		<input type="checkbox"/> yellow <input type="checkbox"/>
EAN size -	LSD job no. L-P-003738		<input type="checkbox"/> black <input type="checkbox"/>
Short Code -	LSD FILE NAME:		<input type="checkbox"/> varnish gloss
SEAL ID 30174893	DACH_SOM_DWC_IL_Smart_Starter_Refill_Kit_0220.indd		<input type="checkbox"/> printing area (does not print)
SEAL ID CS XXXXXXXX	INFOS: -		<input type="checkbox"/> die cut (does not print)
LOGO OF PRINTING COMPANY	TO BE COMPLETED BY PRINTING COMPANY		These files have been set up without trapping parameters or any other print options. Please adapt the data according to your usual guidelines and/or profiles.
	corrections <input type="checkbox"/> yes* <input type="checkbox"/> none		LSD
	* if yes please do provide a detailed description of all changes made		LSD GmbH & Co. KG In der Steele 11-13 40599 Düsseldorf Tel. +49 211 74 84 90 Fax +49 211 74 84 94 10
			Kind regards, LSD GmbH & Co. KG
			5 cm

Inhalt:

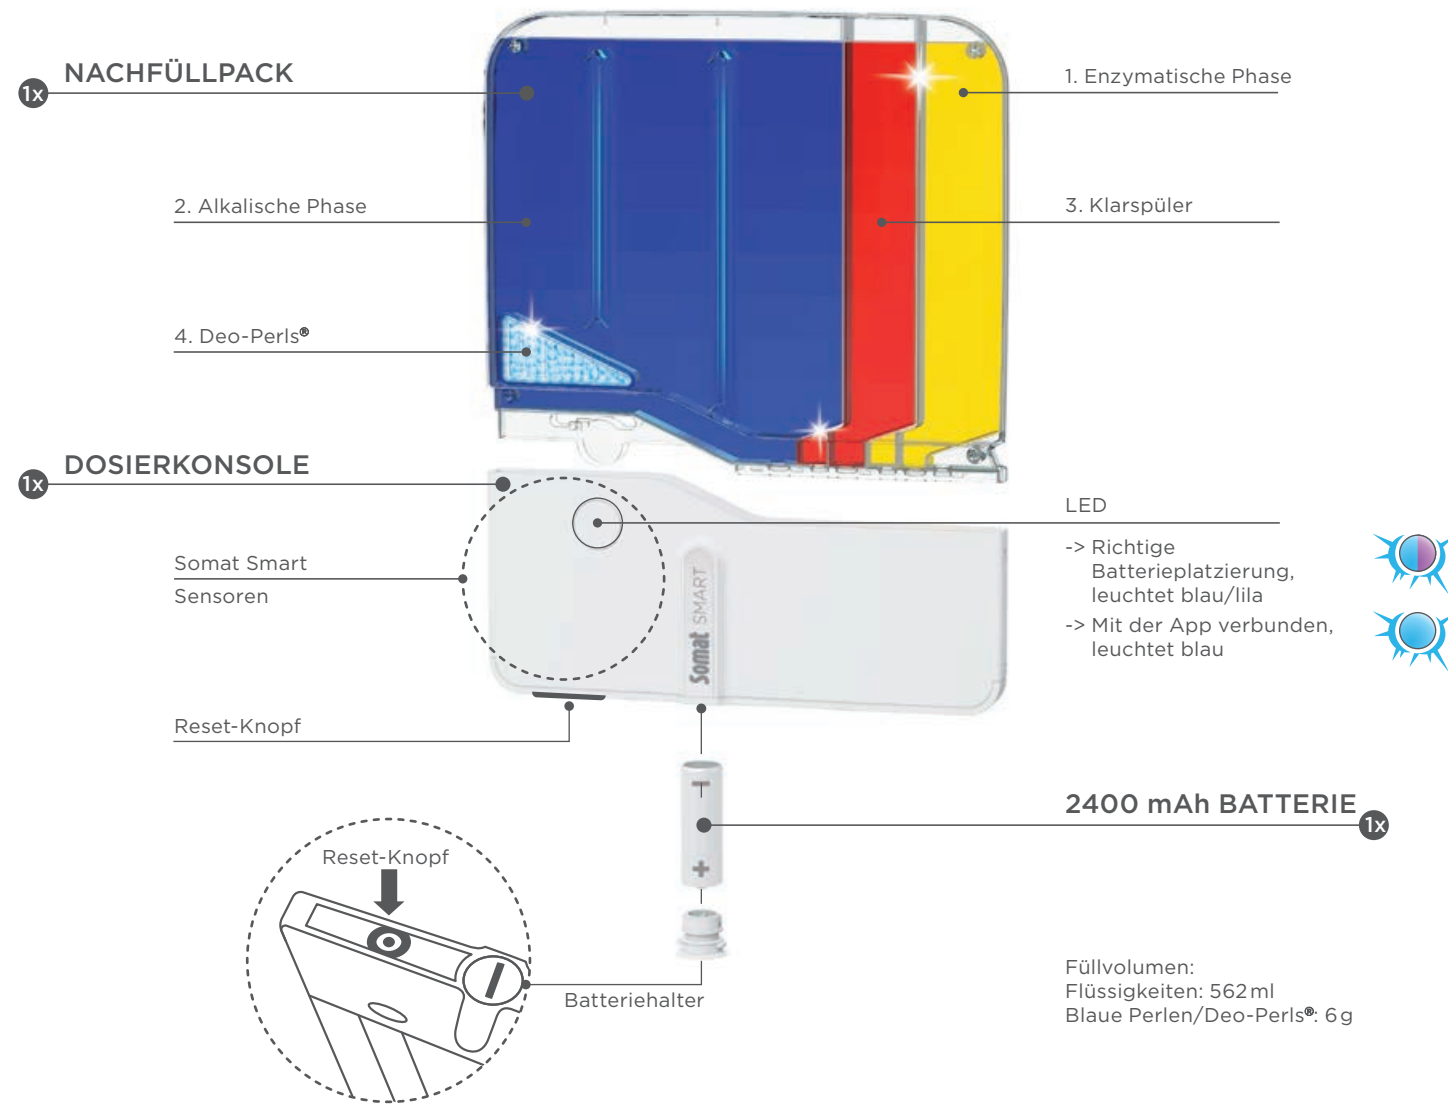

DIE SMARTE DOSIERHILFE FÜR IHRE SPÜLMASCHINE

Das All-in-1 Spülgerät, das automatisch die richtige Menge an Spülmittel zum richtigen Zeitpunkt in den Spülzyklus gibt.

- Für alle* Geschirrspüler geeignet
- Reinigt nach dem Platzieren bis zu 2 Monate**
- Das Spülmittel wird durch eine intelligente Sensor-Technologie zum optimalen Zeitpunkt während des Spülgangs freigesetzt
- Dank seines intelligenten Dosiersystems ermöglicht Somat Smart eine effiziente Verwendung von Spülmittel: Kraftvolle Reinigung mit 56 % weniger Chemie***
- Somat Smart bietet eine All-in-1-Lösung und enthält nicht nur eine Reinigungsfunktion, sondern zusätzlich eine Salz-, Klarspüler- und Glasschutzfunktion, sowie den Frische-Effekt der Deo-Perls®
- Durch die Verwendung des **Energiespar-Programms** Ihrer Spülmaschine können Sie die Umwelt schonen

IMAGE NOT FINAL



STEUERN SIE IHRE SPÜLMASCHINEN-ERGEBNISSE ÜBER DIE APP

- Benutzerdefinierte Reinigungsmodi einstellen
- Verbleibende Anzahl an Waschgängen einsehen
- Automatische Nachbestellung
- Aktivierung einer Wasserhärtekontrolle für optimale Dosierung des Spülmittels
- Auswertung der Reinigungsergebnisse, damit sich das Gerät dem Reinigungsmodus anpassen kann
- Nachverfolgung Ihres Nachhaltigkeitsbeitrags
- Tipps zum Spülmaschinenreinigen & Spülen

ECO-SPÜLPROGRAMM

- Somat Smart liefert auch in ECO-Spülprogrammen für eine ausgezeichnete Leistung, weshalb wir auch ECO-Spülprogramme für die App und Ihre Spülmaschine empfehlen, damit Sie den niedrigsten Wasser- und Energieverbrauch beim Spülgang erzeugen
- Wenn das ECO-Spülprogramm nicht ausreicht, können Sie zu AUTOMATIC wechseln
- Somat Smart überzeugt auch in Kurzprogrammen

Wenn Sie ein Schwarztee-Trinker sind, empfehlen wir Ihnen für eine optimale Leistung, Somat Tabs zu verwenden. Falls Sie dennoch Somat Smart nutzen möchten, stellen sie bitte den Modus 'Töpfe' als Reinigungsmodus in der App ein.

* Besitzen Sie eine Geschirrspülmaschine mit der Somat Smart nicht kompatibel ist, kontaktieren Sie uns zur sofortigen Rückerstattung
 ** 4 Spülgänge/Woche
 *** Somat Smart dosiert 8,33g Spülmittel pro Spülgang, während Somat Gold 19g pro Spülgang im Eco-Spülprogramm dosiert.

GENERAL DATA	APPROVAL DATA	PHONE	Printing material:	
DIE CUT / SIZE (mm) 458 x 197 mm	Responsible person marketing Ekaterina Cherneyko	+49 211 797 9804	<input checked="" type="checkbox"/> white <input type="checkbox"/> transparent <input type="checkbox"/> silver <input type="checkbox"/> direct printing	
IDH no. xxxxxxx	Date of approval by marketing xx.xx.2020		Packaging colour: -	
Material no. xxxxxxx	Responsible person IPD N. N.	+49 211 797 xxxx	Basic Pack. Mat. No.: - Mailing list: HOME / LAUNDRY	
Product Somat DWC IL	Responsible person country N. N.	+49 211 797 xxxx	USED PANTONE TONES ARE JUST INDICATORS!	
Country DACH	Date of 1. approval xx.xx.2020		Colors Printing process	Colors Printing process
Status correction	Date of 2. approval xx.xx.2020		cyan <input type="checkbox"/>	<input type="checkbox"/>
Creation date 27.02.2020	Delivered by PG MR AD	HOME	magenta <input type="checkbox"/>	<input type="checkbox"/>
Correction date 11.03.2020	Responsible person LSD Jennifer Zobel	+49 211 74849 471	yellow <input type="checkbox"/>	<input type="checkbox"/>
EAN (please check) -	Printing company Xxx		black <input type="checkbox"/>	<input type="checkbox"/>
EAN size -	LSD job no. L-P-003738		<input type="checkbox"/>	<input type="checkbox"/>
Short Code -	LSD FILE NAME:		<input type="checkbox"/>	<input type="checkbox"/>
SEAL ID 30174893	DACH_SOM_DWC_IL_Smart_Starter_Refill_Kit_0220.indd		<input type="checkbox"/>	<input type="checkbox"/>
SEAL ID CS XXXXXXXX	INFOS: -		<input type="checkbox"/>	<input type="checkbox"/>
LOGO OF PRINTING COMPANY	TO BE COMPLETED BY PRINTING COMPANY		<input type="checkbox"/> varnish gloss	<input type="checkbox"/>
	corrections <input type="checkbox"/> yes* <input type="checkbox"/> none		<input type="checkbox"/> printing area (does not print)	<input type="checkbox"/>
	* if yes please do provide a detailed description of all changes made			<input type="checkbox"/> die cut (does not print)
			These files have been set up without trapping parameters or any other print options. Please adapt the data according to your usual guidelines and/or profiles.	
			Kind regards, LSD GmbH & Co. KG	
			LSD LSD GmbH & Co. KG In der Steele 11-13 40599 Düsseldorf Tel. +49 211 74 84 90 Fax +49 211 74 84 94 10	
			5 cm	

Wie funktioniert es:




Somat Smart APP


APP HERUNTERLADEN
Um Ihr Somat Smart Gerät über die App zu steuern, laden Sie die App bitte herunter. Folgen Sie dazu den Anweisungen in der Einladungs-E-Mail. Anschließend führt Sie die App durch den Installationsprozess.



Das Gerät kann auch offline, mit Einschränkungen, verwendet werden. Das bedeutet, dass das Gerät immer die Standardmenge an Spülmittel in den Spülzyklus abgeben wird, jedoch ohne Beachtung der Wasserhärte.




1. INSTALLATION
Öffnen Sie den weißen Knopf auf der Unterseite der Konsole mit einer Münze...




1.1
... und setzen Sie die Batterie ein, wobei der Minuspol der Batterie zuerst eingeführt wird. Schließen Sie die weiße Kammer wieder mit einer Münze. (Bei richtiger Positionierung blinkt die LED-Taste auf der weißen Konsole blau & lila*).

*Wenn die LED-Anzeige nicht blau & lila blinkt, überprüfen Sie, ob die Batterie richtig herum eingesetzt wurde. Wenn die Batterie richtig eingesetzt ist, drücken Sie die Reset-Taste für 2 Sekunden. Wenn es immer noch nicht blinkt, drücken Sie bitte die Reset-Taste 10 Sekunden lang, um das Produkt neu zu starten. Wenn die LED-Anzeige immer noch nicht leuchtet, bedeutet dies, dass die Batterie falsch eingesetzt wurde.



1.2
Positionieren Sie die farbige Nachfülleinheit auf der weißen Dosierkonsole im 90°-Winkel. Sollte die Konsole nicht vollkommen sauber sein, können Sie diese mit Wasser abspülen.




1.3
Wenn Sie die Nachfülleinheit absenken, achten Sie bitte darauf, dass die rechte Seite der Nachfülleinheit richtig in das Loch der weißen Dosiereinheit passt.



1.4
Drücken Sie dann die Nachfülleinheit nach unten und klicken Sie beide Einheiten zusammen. (Haben Sie Somat Smart mit Hilfe der App erfolgreich installiert, leuchtet die LED-Taste auf der weißen Konsole Blau)


Entfernen Sie die Schutzfolie von der Deo-Perls® Kammer.



2. EINSETZEN VON SOMAT SMART IN IHRE SPÜLMASCHINE

Stellen Sie Somat Smart in einen Tellerhalter im unteren Korb des Geschirrspülers - mit der weißen Dosiereinheit nach unten und prüfen Sie, ob sich der Sprüharm frei bewegt:

Nicht in den oberen Korb | In den unteren Korb stellen

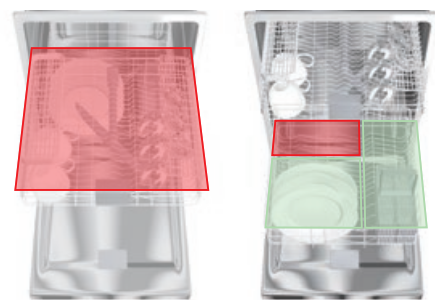


Das Gerät startet automatisch, sobald es in der Spülmaschine platziert ist - auch wenn die App nicht benutzt wird oder installiert ist.



3. NACHFÜLLEINHEIT WECHSELN

Um die leere Nachfülleinheit zu ersetzen
• Halten sie das Gerät über ein Waschbecken und drehen es auf den Kopf (um Tropfen zu vermeiden). Drücken Sie den Entriegelungsknopf (LED Knopf) von beiden Seiten.



• Ziehen Sie nun beide Einheiten auseinander. Achten Sie auf die Flüssigkeitsrückstände.



• Waschen Sie Ihre Hände und spülen Sie die Konsole ab.
• Setzen Sie dann die neue Nachfülleinheit ein.



4. RECYCLEN

Sobald die Patrone leer ist, könne Sie diese im Plastikmüll entsorgen.

Trennen Sie niemals eine nicht vollständig entleerte Nachfülleinheit vom weißen Dosierer, um Undichtigkeiten und Kontakt mit den Reinigungsflüssigkeiten zu vermeiden. Während der Benutzung können sich die Verschlusskappen lösen und in den Kammern schwimmen und/oder ein Geräusch erzeugen. Das ist ein normaler Vorgang.

Leistungen:

- 1. REINIGER** | Die kraftvollen Reinigersubstanzen in Ihrem Somat Smart entfernen selbst hartnäckige Anschmutzungen (z.B. Stärkereste wie Nudeln, Reis, Kartoffeln) zuverlässig
- 2. SALZFUNKTION** | Die speziellen Salz-Ersatzstoffe binden aktiv Kalk im Spülwasser und schützen so vor störenden Ablagerungen auf Geschirr und Gläsern
- 3. LANGZEIT-GLASSCHUTZ** | Der Langzeit-Glasschutz schützt Ihre Gläser vor Glaskorrosion - damit Ihre Gläser länger wie neu bleiben
- 4. STRAHLENDER GLANZ** | Die integrierte Spülhilfe sorgt für strahlenden Glanz auf Geschirr, Gläser und Besteck, damit das Wasser rückstandsfrei vom Geschirr abfließen kann.
- 5. EXTRA-TROCKEN-EFFEKT** | Der Extra-Trocken-Effekt hilft, dass das Wasser rückstandsfrei vom Geschirr abläuft
- 6. MASCHINENPFLEGE** | Entfernt Fett von Ihrem Filter und sorgt für strahlenden Glanz im Geschirrspüler
- 7. DEO-PERLS®** | Verhindern schlechte Gerüche in Ihrem Geschirrspüler

Konzept der LED-Anzeige:

FARBEN	BEDEUTUNG
	Abwechselndes Blinken • Bereit, um sich mit der App zu verbinden • Für das erste Set-Up • Nach dem der Reset-Knopf gedrückt wurde (5 Sek.)
	Blinkt/Anhaltend • Verbindung zum WiFi wird hergestellt/ • Mit WiFi & App verbunden • Erschütterung & Öffnen des Geschirrspülers
	Blinken 3x • Gerät ist aktiv, aber nicht mit WiFi und App verbunden • Erschütterung & Öffnen des Geschirrspülers
	Blinkt/Anhaltend • Verbindung mit WiFi und App gescheitert - Bringen Sie das Gerät näher an Ihren Router heran und drücken Sie den Reset-Knopf. - Überprüfen Sie, dass Ihr WiFi Zuhause funktioniert - Haben Sie ein neues WiFi-Passwort, müssen Sie Ihr Gerät neu einrichten • Firmware-Update
	Blinkt/Anhaltend • Batterie ist leer
	Blinkt alle 10 Sekunden • Patrone ist nicht eingerastet

GENERAL DATA	APPROVAL DATA	PHONE	Printing material: <input checked="" type="checkbox"/> white <input type="checkbox"/> transparent <input type="checkbox"/> silver <input type="checkbox"/> direct printing
DIE CUT / SIZE (mm) 458 x 197 mm	Responsible person marketing Ekaterina Cherneyko	+49 211 797 9804	Packaging colour: -
IDH no. xxxxxxx	Date of approval by marketing xx.xx.2020		Basic Pack. Mat. No.: - Mailing list: HOME / LAUNDRY
Material no. xxxxxxx	Responsible person IPD N. N.	+49 211 797 xxxx	USED PANTONE TONES ARE JUST INDICATORS!
Product Somat DWC IL	Responsible person country N. N.	+49 211 797 xxxx	
Country DACH	Date of 1. approval xx.xx.2020		cyan <input type="checkbox"/>
Status correction	Date of 2. approval xx.xx.2020		magenta <input type="checkbox"/>
Creation date 27.02.2020	Delivered by PG MR AD	HOME	yellow <input type="checkbox"/>
Correction date 11.03.2020	Responsible person LSD Jennifer Zobel	+49 211 74849 471	black <input type="checkbox"/>
EAN (please check) -	Printing company Xxx		<input type="checkbox"/>
EAN size -	LSD job no. L-P-003738		<input type="checkbox"/>
Short Code -	LSD FILE NAME:		<input type="checkbox"/>
SEAL ID 30174893	DACH_SOM_DWC_IL_Smart_Starter_Refill_Kit_0220.indd		<input type="checkbox"/>
SEAL ID CS XXXXXXXX	INFOS: -		<input type="checkbox"/>
LOGO OF PRINTING COMPANY	TO BE COMPLETED BY PRINTING COMPANY		varnish gloss <input type="checkbox"/>
	corrections <input type="checkbox"/> yes* <input type="checkbox"/> none		printing area (does not print) <input type="checkbox"/>
	* if yes please do provide a detailed description of all changes made		die cut (does not print) <input type="checkbox"/>
These files have been set up without trapping parameters or any other print options. Please adapt the data according to your usual guidelines and/or profiles.			LSD
Kind regards, LSD GmbH & Co. KG			LSD GmbH & Co. KG In der Steele 11-13 40599 Düsseldorf Tel. +49 211 74 84 90 Fax +49 211 74 84 94 10
			5 cm

Häufig gestellte Fragen

Was kann ich tun, wenn ich ein defektes Paket erhalte?

Wenn das Produkt beschädigt ist, kontaktieren Sie bitte den Kundenservice, der in der Einladungs-Mail angegeben wurde.

Benötigt Somat Smart immer eine WiFi-Verbindung, sobald es eingerichtet ist?

Nein, sobald Sie Ihr Gerät mit der App ausgestattet und die Spülpräferenzen eingestellt haben, kann es autonom arbeiten. Wenn Sie jedoch den Verschmutzungsgrad ändern wollen, muss es mit dem Internet verbunden sein, um die Einstellung zu aktualisieren.

Wenn Sie Zweifel an der Verbindung Ihres Geräts mit dem Internet haben, drücken Sie kurz auf die Taste an der Unterseite der Gerätekonsole. Die LED zeigt den aktuellen Status Ihres Gerätes an:

Violettes Licht, nach kurzem blauen Leuchten - Verbindung ist unterbrochen,

Leuchtet konstant blau - Verbindung ist stabil.

Wenn Sie Probleme mit dem angeschlossenen Gerät haben, versuchen Sie es während der Einstellung des Verschmutzungsgrades aus der Spülmaschine zu nehmen und es näher an den Router zu bringen. Um eine schnellere Wiederverbindung mit dem WiFi einzuleiten, drücken Sie kurz die Taste auf der Unterseite.

Wenn Sie beispielsweise den ISP (Internet Service Provider), das WiFi-Netzwerk-Passwort usw. geändert haben, müssen Sie die Geräte wie jedes normale WiFi-Gerät neu einrichten.

Ich probiere Somat Smart im Heim-WiFi-Modus aus, aber die Verbindung kann nicht hergestellt werden. Was muss ich tun?

Dieses Gerät ist ein WiFi zertifiziertes Produkt und funktioniert wie Ihr Telefon oder Computer mit den gleichen Vorteilen und Einschränkungen. Wenn Sie Probleme haben, das Gerät mit Ihrem WiFi zu verbinden, stellen Sie folgendes sicher:

Sie haben einen normalen ISP (Internet Service Provider) Router mit einem WiFi Netzwerk, das in der Version 2.4 läuft. GHz-Frequenz eines drahtlosen Signals.

Ihr ISP-Router ist ordnungsgemäß mit dem Internet verbunden. Hinweis: Überprüfen Sie den Rest Ihrer Geräte, ob diese funktionieren.

Vergewissern Sie sich, dass das Passwort, das Sie während der Installation eingegeben haben, weiterhin funktioniert. Wenn sich Ihr WLAN-Netzwerk-Passwort geändert hat, müssen Sie Ihre Geräte neu einrichten.

Achten Sie darauf, dass Sie keine Firewall haben, die Ihr Heim-WiFi vor den neuen Geräten schützt.

Stellen Sie sicher, dass Sie die neueste Version der App haben. Wir aktualisieren die App regelmäßig, für das beste Produkterlebnis.

Sie können Ihr Gerät jederzeit zurücksetzen, indem Sie die Taste an der Unterseite der Hauptkonsole 5 Sekunden lang drücken. Das Gerät setzt die WiFi-Verbindung zurück und ist bereit für eine Neukonfiguration.

Warum verliert das Gerät die Internetverbindung? (Leuchtet Violett)

Der mögliche Grund dafür ist, dass der Entfernungsabstand zum Router zu groß ist. Bringen Sie das Gerät näher an den Router oder installieren Sie einen WiFi-Repeater in Ihrem Heim-WiFi-Netzwerk.

Wie kann man die Nachfülleinheit entfernen?

Um die leere Nachfülleinheit zu ersetzen, drehen Sie das Gerät über einem Waschbecken auf den Kopf (um Tropfen zu vermeiden), drücken Sie den Entriegelungsknopf (LED-Knopf) von beiden Seiten. Ziehen Sie nun beide Einheiten auseinander. Setzen Sie dann die neue Nachfülleinheit ein. Die rote LED Lampe erlischt, sobald Sie die neue Patrone anschließen. Vermeiden Sie es, dass verschüttete Reinigungsmittel zu berühren, und falls Sie es berühren, reinigen Sie bitte Ihre Hände mit Wasser.

Was kann ich tun, wenn mein Gerät undicht ist?

Trennen Sie niemals eine nicht vollständig entleerte Nachfüllvorrichtung vom weißen Dosierer, um Undichtigkeiten und Kontakt mit den Reinigungsflüssigkeiten zu vermeiden. Wenn das Produkt undicht ist, bitte kontaktieren Sie Henkel Customer Service Deutschland: Tel.: (0800) 111 2290.

Warum konnte ich mein Gerät nicht einrichten?

Es gibt mehrere Gründe, warum Sie Somat Smart möglicherweise nicht an das WLAN anschließen können:

- Prüfen Sie bitte, ob Sie das richtige WiFi-Passwort eingegeben haben.
- Ein weiterer wahrscheinlicher Grund kann sein, dass das Smartphone das Heim-WiFi finden kann, aber der Dispenser nicht. Es wäre hilfreich, das Gerät näher an den Router zu bringen.
- Es kann auch sein, dass Sie eine Firewall aktiviert haben, oder dass der Router nur für das Surfen im Web verwendet werden kann. Der Diffusor benötigt einen freien / unbegrenzten Zugang zum Internet, um zu funktionieren. Es könnte im Setup stecken bleiben, wenn der Zugriff eingeschränkt ist.

d. Ein weiterer Grund kann sein, dass die Verbindung zum Backend-Server während der Installation fehlschlägt. In diesem Fall versuchen Sie bitte, es erneut einzurichten.

e. Wenn Sie sehen, dass das Gerät eingerichtet ist (er leuchtet nicht mehr blau und violett), aber Ihr Einrichtungsprozess in der App nicht abgeschlossen ist. Versuchen Sie zu den Einstellungen Ihres Smartphones zu gehen und zu überprüfen, ob es sich wieder mit Ihrem Heim-WiFi verbunden hat.

» **Das Gerät leuchtet immer noch blau und violett** - das Gerät befindet sich noch im Setup-Modus. Wahrscheinlich wurden die Einstellungen nicht richtig gesendet oder das WiFi-Passwort war nicht korrekt. Sie sollten den Installationsvorgang wiederholen.

» **Keine LED Anzeige.** Drücken Sie die schwarze Taste an der Unterseite der Konsole, um den Status der Zapfsäule zu überprüfen.

leuchtet grün - das Gerät ist als offline konfiguriert. Um es in die App einzubinden, drücken Sie die Taste auf der Unterseite der weißen Konsole für 5 Sekunden und starten Sie die Installation in der App.

leuchtet blau - das Gerät ist mit dem WiFi verbunden. Stellen Sie jedoch sicher, dass das WiFi ein korrektes Signal mit dem Internet liefert.

leuchtet Violett - das Gerät versucht, sich mit dem WiFi zu verbinden, kann aber aufgrund des Fehlens des WiFi-Signals oder eines falschen Passworts keine Verbindung aufbauen.

Kann ich Somat Smart nutzen, ohne mit der App verbunden zu sein? Wenn ja, wie geht das Schritt für Schritt?

Für ein optimales Produkterlebnis empfehlen wir dringend die Verwendung mit der App, auch wenn Sie das Gerät mit gewissen Einschränkungen offline nutzen können. (Benutzerdefinierte Reinigungsmodi einstellen, Verbleibende Anzahl an Spülgängen einsehen, Automatische Nachbestellung, Erinnerung an Maschinenpflege und Geschirrspültipps erhalten).

Wollen Sie Somat Smart dennoch ohne App nutzen, legen Sie dazu einfach die Batterie ein und lassen Sie das Gerät für 5 Minuten stehen, bis die LED Anzeige nicht mehr blau/violett leuchtet. Das Gerät geht in den Offline-Modus, danach können Sie es in die Spülmaschine stellen.

Worin besteht der Unterschied zwischen einem "einmaligen" und einem "normalen" Modus?

Die regulären Modi wiederholen sich für jede weitere Wäsche. Sie wurden speziell für den täglichen Gebrauch entwickelt. Für die besonderen Anlässe wurden einmalige Modi angelegt. Sie werden nur einmal verwendet, und das Gerät kehrt im nächsten Zyklus automatisch in den normalen Modus zurück.

Wie kann ich einen Modus ändern?

Verwenden Sie die Soma Smart App, um den Modus vor dem Spülen zu ändern. Nach Beginn des Spülzyklus gibt es keine Möglichkeit, den Modus zu ändern.

Welcher Modus wird eingestellt, wenn ich das Gerät ohne App benutze?

Ohne App wird der Standardmodus, für 25 Spülgänge pro Nachfülleinheit, eingestellt.

Is the LED on the device always active while using? Or is the LED light only active in application stage?

The LED is on only when it is in the setup mode, or when user wakes the device app by pressing the button on the bottom of the console.

Ist die LED Anzeige am Gerät während der Benutzung immer aktiv?

Nein, die LED Anzeige leuchtet nur, wenn sie sich im Setup-Modus befindet, oder wenn der Benutzer die Geräte-App durch Drücken der Taste an der Unterseite der Konsole aktiviert.

Kann ich Somat Smart in jeder Geschirrspülmaschine verwenden?





Ja, Sie können es in jeder Geschirrspülmaschine verwenden. Achten Sie darauf, dass das Gerät die Sprüharme Ihrer Geschirrspülmaschine nicht blockiert. Wenn Sie sich nicht sicher sind, überprüfen Sie dies vor dem Start, indem Sie dem Sprüharm oben und unten einen kleinen Anstoß geben. Diese sollten Ihr Gerät nicht berühren.

Kann ich Somat Smart mit jeder Art von Reinigungszyklus in der Geschirrspülmaschine verwenden?

Ja, Wir empfehlen, das Eco-Spülprogramm Ihrer Geschirrspülmaschine zu verwenden. Der Eco-Zyklus ist der effizienteste Zyklus in Bezug auf Energie- und Wasserverbrauch sowie Leistung. Natürlich arbeitet Somat Smart in jedem Zyklus (außer der Vorwäsche). Somat Smart passt sich dem gewählten Zyklus an und dosiert die richtige Menge an Spülmitteln zur richtigen Zeit.

Muss ich Salz oder Klarspüler einfüllen/nachfüllen und mein Geschirr abspülen?

Bis zu einer Wasserhärte von 21°dH müssen Sie kein Salz einfüllen. Wenn Sie noch Salz im Salzbehälter haben, hat das keinen negativen Einfluss auf die Leistung. Somat Smart enthält einen Klarspüler und dosiert diesen zum richtigen Zeitpunkt im Geschirrspülgang. Daher müssen Sie auch keinen Klarspüler nachfüllen. Wenn Sie den Klarspüler noch im Fach haben, reduzieren Sie die Dosierung bitte auf das Minimum, um eine Überdosierung zu vermeiden oder die Dosierung zu deaktivieren. Bitte lesen Sie in der Bedienungsanleitung Ihres Geschirrspülers nach, wie dies geht.

GENERAL DATA	APPROVAL DATA	PHONE	Printing material:
DIE CUT / SIZE (mm) 458 x 197 mm	Responsible person marketing Ekaterina Cherneyko	+49 211 797 9804	<input checked="" type="checkbox"/> white <input type="checkbox"/> transparent <input type="checkbox"/> silver <input type="checkbox"/> direct printing
IDH no. xxxxxxx	Date of approval by marketing xx.xx.2020		Packaging colour: -
Material no. xxxxxxx	Responsible person IPD N. N.	+49 211 797 xxxx	Basic Pack. Mat. No.: - Mailing list: HOME / LAUNDRY
Product Somat DWC IL	Responsible person country N. N.	+49 211 797 xxxx	USED PANTONE TONES ARE JUST INDICATORS!
Country DACH	Date of 1. approval xx.xx.2020		
Status correction	Date of 2. approval xx.xx.2020		Colors Printing process Colors Printing process
Creation date 27.02.2020	Delivered by PG MR AD HOME		 cyan <input type="checkbox"/>
Correction date 11.03.2020	Responsible person LSD Jennifer Zobel	+49 211 74849 471	 magenta <input type="checkbox"/>
EAN (please check) -	Printing company Xxx		 yellow <input type="checkbox"/>
EAN size -	LSD job no. L-P-003738		 black <input type="checkbox"/>
Short Code . -	LSD FILE NAME:		<input type="checkbox"/>
SEAL ID 30174893	DACH_SOM_DWC_IL_Smart_Starter_Refill_Kit_0220.indd		<input type="checkbox"/>
SEAL ID CS XXXXXXXX	INFOS: -		<input type="checkbox"/>
LOGO OF PRINTING COMPANY	TO BE COMPLETED BY PRINTING COMPANY		<input type="checkbox"/> varnish gloss
	corrections <input type="checkbox"/> yes* <input type="checkbox"/> none		<input type="checkbox"/> printing area (does not print)
	* if yes please do provide a detailed description of all changes made		<input type="checkbox"/> die cut (does not print)
These files have been set up without trapping parameters or any other print options. Please adapt the data according to your usual guidelines and/or profiles.			LSD
Kind regards, LSD GmbH & Co. KG			LSD GmbH & Co. KG In der Steele 11-13 40599 Düsseldorf Tel. +49 211 74 84 90 Fax +49 211 74 84 94 10
			5 cm

Für weitere Informationen, bitte besuchen Sie
www.somatsmart.de

BATTERIE-TYP: CR17450 3V

- Jedes Starter Kit beinhaltet eine spezielle Batterie für die Nutzung der Somat Smart Konsole.
- Wenn die Batterie leerläuft, leuchtet die LED-Lampe rot.
- Eine neue Batterie wird mit dem Kauf einer Nachfülleinheit geliefert.
- Die Batterie ist nicht aufladbar. Versuchen Sie nicht, sie aufzuladen!
- Leere Batterie aus dem Gerät herausnehmen und sorgfältig entsorgen.
- Die Batterie darf nicht im normalen Haushaltsmüll entsorgt werden.
- Bitte übergeben Sie die Batterie und/oder das gebrauchte Gerät zur zuständigen Sammelstelle zum Recycling von Elektrogeräten.
- Mit der richtigen Entsorgung leisten Sie einen Beitrag zum Umweltschutz und vermeiden potenzielle Gefahren, die mit der falschen Entsorgung des Produktes einhergehen würden.
- Für weitere Informationen zum Recycling und zur Entsorgung des Produktes, kontaktieren Sie bitte Ihre örtliche zuständige Behörde.
- Sollte das Gerät für eine lange Zeit ungenutzt bleiben, tauschen Sie bitte die Batterie mit einer neuen aus - Typ: CR17450 3V erwerblich auf Amazon.

KINDER

- Dieses Gerät kann von Kindern ab einem Alter von 8 Jahren, Personen mit eingeschränkten mentalen oder körperlichen Fähigkeiten oder Personen ohne jeweilige Erfahrung oder verwendet werden, wenn sie von einer zuständigen Person betreut und/oder eingewiesen werden und die dazugehörigen Gefahren verstehen.
- Kinder dürfen mit dem Gerät nicht spielen. Reinigung und Instandhaltung darf nicht von Kindern ohne Aufsicht durchgeführt werden.

NUTZUNG

- Dieses Gerät ist für den privaten häuslichen Gebrauch.



ACHTUNG

BLAUE PERLEN: Kann allergische Hautreaktionen verursachen. Enthält: Linalylacetat

BLAUE FLÜSSIGKEIT, ROTE FLÜSSIGKEIT: Verursacht schwere Augenreizung.

GELBE FLÜSSIGKEIT: Kann allergische Reaktionen hervorrufen. Enthält: Protease, Amylase
Ist ärztlicher Rat erforderlich, Verpackung oder Kennzeichnungsetikett bereithalten. Darf nicht in die Hände von Kindern gelangen.

Keep out of reach of children. Wear protective gloves.

BEI KONTAKT MIT DEN AUGEN: Einige Minuten lang behutsam mit Wasser spülen. Eventuell vorhandene Kontaktlinsen nach Möglichkeit entfernen. Weiter spülen.

BEI ANHALTENDER AUGENREIZUNG: Ärztlichen Rat einholen/ärztliche Hilfe hinzuziehen.

Inhalt/Behälter gemäß nationalen Vorschriften der Entsorgung zuführen.

INHALTSSTOFFE:

BLAUE FLÜSSIGKEIT: 5-15% Polycarboxylate, Phosphonate

BLAUE PERLEN: Weitere Inhaltsstoffe: Duftstoffe, Linalool, Limonene

ROTE FLÜSSIGKEIT: 5-15% nichtionische Tenside, anionische Tenside

Weitere Inhaltsstoffe: Konservierungsmittel, Phenoxyethanol, Benzisothiazolinone

GELBE FLÜSSIGKEIT: 5-15% nichtionische Tenside, anionische Tenside
Weitere Inhaltsstoffe: Konservierungsmittel, Phenoxyethanol, Benzisothiazolinone, Enzyme



Somat Smart APP



Apple und das Apple Logo sind Marken von Apple Inc., die in den USA und anderen Ländern eingetragen sind. App Store ist eine eingetragene Dienstleistungsmarke der Apple Inc.

Android, Google Play und das Google Play-Logo sind Marken der Google Inc.

Weitere Informationen über Somat Smart finden Sie unter www.somatsmart.de

Sie können den 2400 mAh Akku bei Amazon nachkaufen.



Flüssigkeiten: 562 ml e
Blaue Perlen | Deo-Perls®: 6 g




DE: Henkel Wasch- und Reinigungsmittel GmbH, D-40191 Düsseldorf, Notruf-Nr.: 0211/797-3350
AT: Henkel Central Eastern Europe GmbH, Erdbergstraße 29, A-1030 Wien, Tel.: 01/711040
CH: Henkel & Cie. AG, Postfach, CH-4133 Pratteln 1, Tel.: 0800/552350



OPERATION MANUAL
English

GENERAL DATA	APPROVAL DATA	PHONE	Printing material:
DIE CUT / SIZE (mm) 458 x 197 mm	Responsible person marketing Ekaterina Cherneyko	+49 211 797 9804	<input checked="" type="checkbox"/> white <input type="checkbox"/> transparent <input type="checkbox"/> silver <input type="checkbox"/> direct printing
IDH no. xxxxxxx	Date of approval by marketing xx.xx.2020		Packaging colour: -
Material no. xxxxxxx	Responsible person IPD N. N.	+49 211 797 xxxx	Basic Pack. Mat. No.: - Mailing list: HOME / LAUNDRY
Product Somat DWC IL	Responsible person country N. N.	+49 211 797 xxxx	USED PANTONE TONES ARE JUST INDICATORS!
Country DACH	Date of 1. approval xx.xx.2020		Colors Printing process Colors Printing process
Status correction	Date of 2. approval xx.xx.2020		<input type="checkbox"/> cyan <input type="checkbox"/>
Creation date 27.02.2020	Delivered by PG MR AD HOME		<input type="checkbox"/> magenta <input type="checkbox"/>
Correction date 11.03.2020	Responsible person LSD Jennifer Zobel	+49 211 74849 471	<input type="checkbox"/> yellow <input type="checkbox"/>
EAN (please check) -	Printing company Xxxx		<input type="checkbox"/> black <input type="checkbox"/>
EAN size -	LSD job no. L-P-003738		<input type="checkbox"/> varnish gloss
Short Code -	LSD FILE NAME:		<input type="checkbox"/> printing area (does not print)
SEAL ID 30174893	DACH_SOM_DWC_IL_Smart_Starter_Refill_Kit_0220.indd		<input type="checkbox"/> die cut (does not print)
SEAL ID CS XXXXXXXX	INFOS: -		
LOGO OF PRINTING COMPANY	TO BE COMPLETED BY PRINTING COMPANY		
	corrections <input type="checkbox"/> yes* <input type="checkbox"/> none		
	* if yes please do provide a detailed description of all changes made		
			These files have been set up without trapping parameters or any other print options. Please adapt the data according to your usual guidelines and/or profiles.
			Kind regards, LSD GmbH & Co. KG
			LSD LSD GmbH & Co. KG In der Steele 11-13 40599 Düsseldorf Tel. +49 211 74 84 90 Fax +49 211 74 84 94 10
			5 cm

Content:

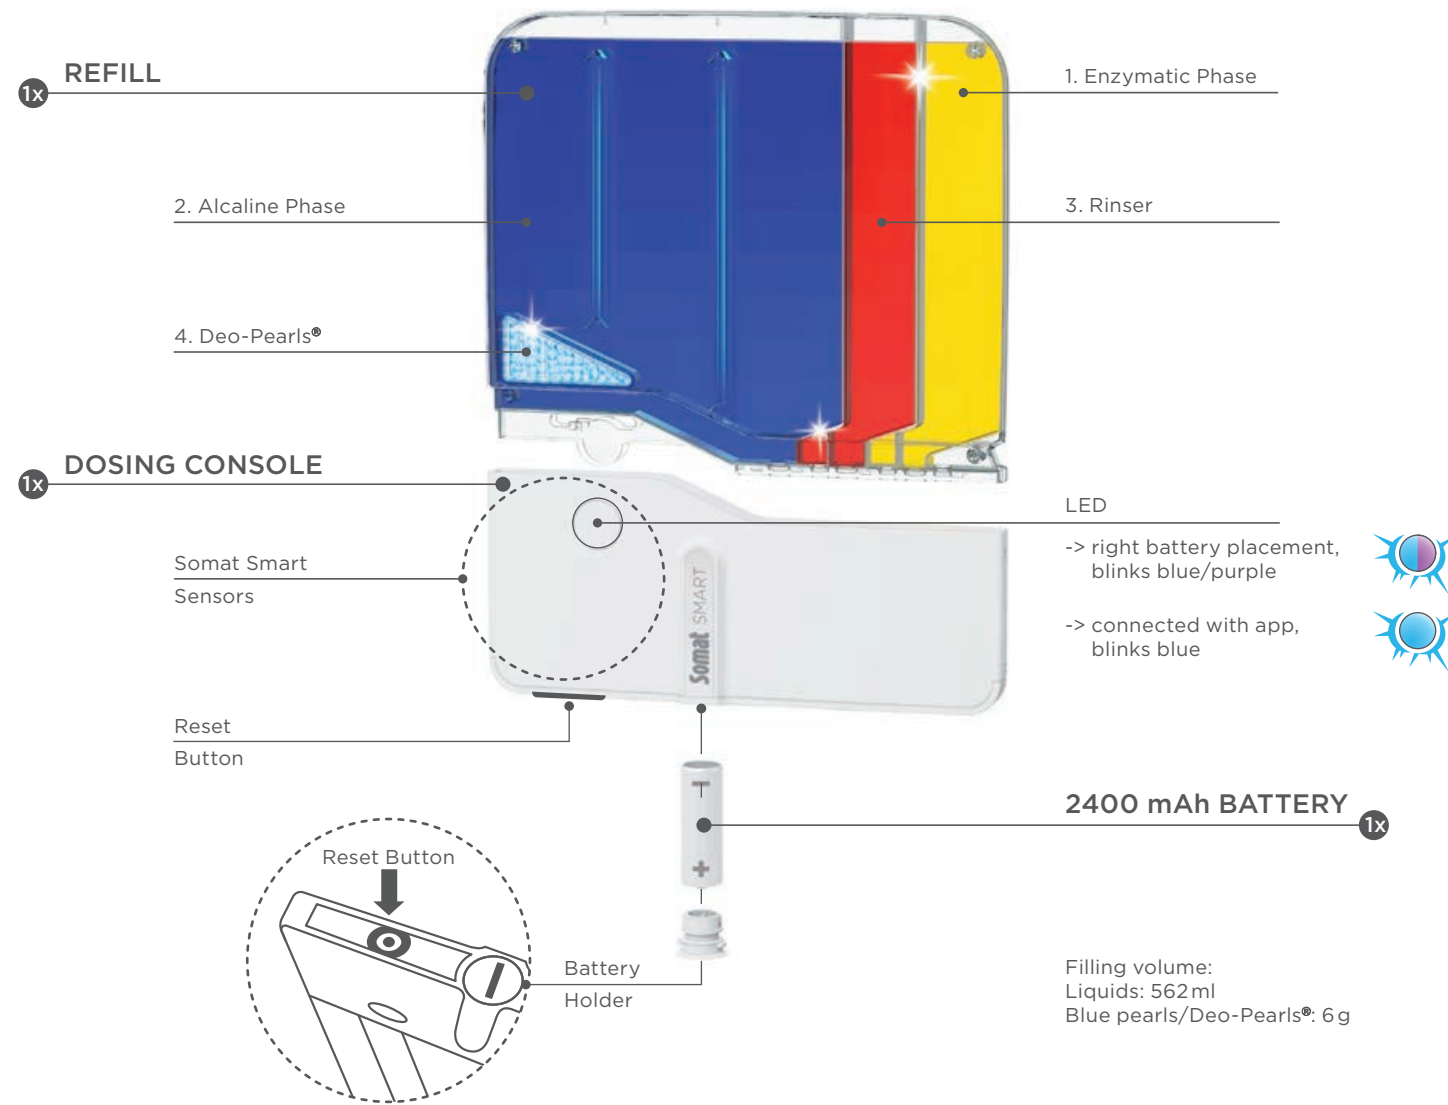

THE SMART DOSING DEVICE FOR YOUR DISHWASHER

All-in-1 dishwashing device to automatically release the right amount of detergent at the right time in the cycle.

- Universal for all* dishwashers
- Once placed, cleans up to 2 months**
- Advanced sensor technology to release the right amount of detergent at the right time in the cycle
- Thanks to its smart dosing system, Somat Smart allows efficient usage of detergent: powerful cleaning with 56% less chemistry***
- All-in-1 solution includes cleaner, rinser, salt effect, machine cleaner and deo-pearls.
- Save energy with setting **eco program as default** for your dishwasher



IMAGE NOT FINAL



CONTROL YOUR DISHWASHING ROUTINE VIA APP

- set customized cleaning modes
- see remaining number of washing cycles
- reorder refill cartridge automatically
- activate water hardness control feature for optimal detergent dosage
- evaluate your cleaning results to allow the device to adapt the cleaning mode
- follow your sustainability contributions
- check for machine cleaning & dishwashing tips



ECO CYCLE

- Somat Smart delivers top performance in ECO cycle, hence we recommend to choose ECO cycle in both Somat SMART APP and when setting the dishwasher to ensure best water and energy consumption
- if ECO is not enough, change to AUTOMATIC
- Somat Smart is also designed for short cycles

If you are a black tea drinker, we recommend you to use Somat Tabs for optimal performance. In case you still would like to use Somat Smart, we recommend to use the mode ' Pots' as cleaning mode in the app.

* If you still come across a dishwasher that does not fit Somat Smart, contact us for immediate reimbursement
 ** 4 cycles/week
 *** Somat Smart doses 8,33g of detergent per Job vs 19g/ Job Somat Gold in the Eco program.

GENERAL DATA	APPROVAL DATA	PHONE	Printing material:
DIE CUT / SIZE (mm) 458 x 197 mm	Responsible person marketing Ekaterina Cherneyko	+49 211 797 9804	<input checked="" type="checkbox"/> white <input type="checkbox"/> transparent <input type="checkbox"/> silver <input type="checkbox"/> direct printing
IDH no. xxxxxxx	Date of approval by marketing xx.xx.2020		Packaging colour: -
Material no. xxxxxxx	Responsible person IPD N. N.	+49 211 797 xxxx	Basic Pack. Mat. No.: - Mailing list: HOME / LAUNDRY
Product Somat DWC IL	Responsible person country N. N.	+49 211 797 xxxx	USED PANTONE TONES ARE JUST INDICATORS!
Country DACH	Date of 1. approval xx.xx.2020		Colors Printing process Colors Printing process
Status correction	Date of 2. approval xx.xx.2020		<input type="checkbox"/> cyan <input type="checkbox"/>
Creation date 27.02.2020	Delivered by PG MR AD	HOME	<input type="checkbox"/> magenta <input type="checkbox"/>
Correction date 11.03.2020	Responsible person LSD Jennifer Zobel	+49 211 74849 471	<input type="checkbox"/> yellow <input type="checkbox"/>
EAN (please check) -	Printing company Xxx		<input type="checkbox"/> black <input type="checkbox"/>
EAN size -	LSD job no. L-P-003738		<input type="checkbox"/> <input type="checkbox"/>
Short Code -	LSD FILE NAME:		<input type="checkbox"/> <input type="checkbox"/>
SEAL ID 30174893	DACH_SOM_DWC_IL_Smart_Starter_Refill_Kit_0220.indd		<input type="checkbox"/> <input type="checkbox"/>
SEAL ID CS XXXXXXXX	INFOS: -		<input type="checkbox"/> <input type="checkbox"/>
			<input type="checkbox"/> varnish gloss
			<input type="checkbox"/> printing area (does not print)
			<input type="checkbox"/> die cut (does not print)
			These files have been set up without trapping parameters or any other print options. Please adapt the data according to your usual guidelines and/or profiles.
			LSD
			LSD GmbH & Co. KG In der Steele 11-13 40599 Düsseldorf Tel. +49 211 74 84 90 Fax +49 211 74 84 94 10
			Kind regards, LSD GmbH & Co. KG
			5 cm
			TO BE COMPLETED BY PRINTING COMPANY
			corrections <input type="checkbox"/> yes* <input type="checkbox"/> none
			* if yes please do provide a detailed description of all changes made

How it works:




Somat Smart APP

DOWNLOAD APP

To control your Somat Smart device via the app, download the app. The app then guides you through the installation process.



When offline, you can use the device as well, but with certain limitations. For example the device will always dose the standard quantity of detergent blends, no matter which cycle you chose and disregard of your water hardness level.



1. INSERT

Open the white button on the bottom of the concole with a coin...

1.1

...and insert the battery, with the - going first inside. Close the white chamber with a coin again. (If right positioned, the LED button on the white console blinks blue & purple*)

*If the LED is not blinking blue & purple, check that you inserted the battery in the right direction. If yes, touch the reset button 2 seconds. If it still does not blink, press the reset button 10 seconds and you can onboard the product again. If still the LED does not blink, it definitely means that the battery was wrongly inserted.

1.2

Position the colorful refill unit on the white dosing console in a 90° angle. If the refill is not perfectly clean due to transportation, you can rinse it under the water.


1.3

As you lower the refill down, ensure proper fit of the right side of the device into the hole.

1.4

Then press the refill down and click both units into place. (If you have successfully installed the app, the LED on the white console lights up blue)


Remove the protective film from the Deo- Pearls® chamber.



2. PLACE

Place the Somat Smart in a plate holder in the lower basket - with the white dosing unit facing downwards:

Not in upper basket | Place in lower basket

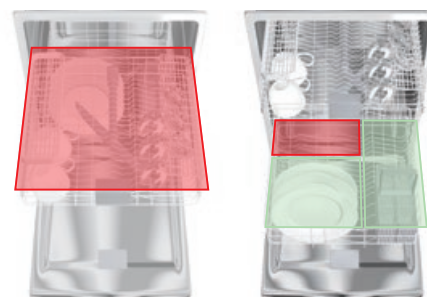


The device starts working automatically when it is placed in the dishwasher. Even if the app is not used or installed.



3. CHANGE THE REFILL UNIT

To replace the empty refill unit:

- Hold device above a sink (to avoid drops), press the release button (LED button) from both sides.



- Now pull both units apart. Be careful with the remaining liquid.



- Wash hands and rinse the console.
- Then insert the new refill unit.



4. RECYCLE

To recycle the empty refill cartridge, please dispose of it in the container for plastics.

Never disconnect a not fully emptied refill unit from the white dosing unit, to avoid leakage and contact with the cleaning fluids. During use, the closure caps can come loose and float in the detergent chambers and/or make a noise by movement. These are normal procedures.

Functions:

- 1. CLEANER** | The powerful cleaning agents in your Somat Smart reliably remove even stubborn dirt (e.g. starch residues such as pasta, rice, potatoes)
- 2. SALT FUNCTION** | The special salt substitutes actively binds water hardness in the water and thus protect against deposits on dishes and glasses
- 3. LONG-TERM GLASS PROTECTION** | The long-term glass protection delays glass corrosion on your glasses - your glasses stay new for long
- 4. RINSER FOR SHINE** | The integrated rinse aid ensures radiant shine on the dishes, glasses and cutlery that helps the water run off the dishes without residue
- 5. EXTRA DRY EFFECT** | The extra-dry effect helps your dishes to dry efficiently & avoid spotting and filming
- 6. MACHINE CLEANER** | Removes fat from your filter and provides a brilliant shine in the dishwasher
- 7. DEO-PEARLS*** | Prevent bad smells in your dishwasher

LED lights:

APPEARANCE	IMPACT
2 colors alternate pulsing	<ul style="list-style-type: none"> • Ready to connect to the app • After first assembly • After reset button pressed (5 sec)
Slow pulsation	<ul style="list-style-type: none"> • Connecting to WiFi during device onboarding • Device is connected with WiFi and App and operates as usual • In case of vibration and when opening the dishwasher
3 x pulsing	<ul style="list-style-type: none"> • Device is in the offline mode (not connected to WiFi) • In case of vibration and when opening the dishwasher
Pulsing	<ul style="list-style-type: none"> • Connection failed with WiFi & App • To fix the connection: <ul style="list-style-type: none"> - Bring the device closer to your router and shortly press the black button on the bottom of the console - Check that the WiFi at home is available - If you have changed the WiFi password, it is necessary to reset the device • Firmware update running
Continuous flash	<ul style="list-style-type: none"> • Empty battery
Pulsing	<ul style="list-style-type: none"> • Cartridge is dis-attached
Continuous flash	<ul style="list-style-type: none"> • Cartridge is dis-attached

GENERAL DATA	APPROVAL DATA	PHONE	Printing material:
DIE CUT / SIZE (mm) 458 x 197 mm	Responsible person marketing Ekaterina Cherneyko	+49 211 797 9804	<input checked="" type="checkbox"/> white <input type="checkbox"/> transparent <input type="checkbox"/> silver <input type="checkbox"/> direct printing
IDH no. xxxxxxxx	Date of approval by marketing xx.xx.2020		Packaging colour: -
Material no. xxxxxxxx	Responsible person IPD N. N.	+49 211 797 xxxxx	Basic Pack. Mat. No.: - Mailing list: HOME / LAUNDRY
Product Somat DWC IL	Responsible person country N. N.	+49 211 797 xxxxx	USED PANTONE TONES ARE JUST INDICATORS!
Country DACH	Date of 1. approval xx.xx.2020		Colors Printing process Colors Printing process
Status correction	Date of 2. approval xx.xx.2020		cyan
Creation date 27.02.2020	Delivered by PG MR AD	HOME	magenta
Correction date 11.03.2020	Responsible person LSD Jennifer Zobel	+49 211 74849 471	yellow
EAN (please check) -	Printing company Xxx		black
EAN size -	LSD job no. L-P-003738		white
Short Code -	LSD FILE NAME:		white
SEAL ID 30174893	DACH_SOM_DWC_IL_Smart_Starter_Refill_Kit_0220.indd		white
SEAL ID CS XXXXXXXX	INFOS: -		white
			white
LOGO OF PRINTING COMPANY			white
	TO BE COMPLETED BY PRINTING COMPANY		white
	corrections <input type="checkbox"/> yes* <input type="checkbox"/> none		varnish gloss
	* if yes please do provide a detailed description of all changes made		printing area (does not print)
			die cut (does not print)
			These files have been set up without trapping parameters or any other print options. Please adapt the data according to your usual guidelines and/or profiles.
			LSD
			Kind regards, LSD GmbH & Co. KG
			5 cm
			LSD GmbH & Co. KG In der Steele 11-13 40599 Düsseldorf Tel. +49 211 74 84 90 Fax +49 211 74 84 94 10

Questions & Answers:

What can I do when I receive a broken package?

If the product is damaged, please contact Henkel Customer Service in Germany (0800)1112290; in U.S.A. (800) 457-8739.

Once the Somat Smart is set up, does it always need a WiFi connection?

No, once you have onboarded your device with the app and set the washing preferences, it can work autonomously. However, if you need to change the cleaning mode it should be connected to the Internet to get an updated setting.

In case you have doubts regarding connection of your device to the Internet, shortly press the reset button on the bottom of the device console. The LED will reflect the current status of your device:

Violet blinking after a few blue flashes – connection is lost,
Continuous blue flash – connection is stable.

If you are experiencing any issues with the connected device, try to take it out from the dishwasher while setting up the cleaning mode and move it closer to the router. To initiate a faster reconnection to the WiFi, shortly press the black button in the bottom of the device.

If you have been changing something like ISP (Internet Service Provider), Wi-Fi network password, etc., you will have to set up the devices again like any normal Wi-Fi enabled device.

I am trying Somat Smart in the home Wi-Fi condition, but its connection is not easy. How to deal with it?

- This device is a Wi-Fi certified product and works like your phone or computer with the same advantages and limitations. If you have problems to connect the device to your Wi-Fi, make sure that:
- You have a normal ISP (Internet Service Provider) router with a Wi-Fi Network running in the 2.4. Ghz frequency of a wireless signal.
- Your ISP router is properly connected to the internet. Hint: Check the rest of your devices if they are working.
- Make sure that the password you have introduced during the on-boarding still works. If your Wi-Fi network password has been changed, you have to set up your devices again.
- Make sure that you have no Firewall protecting your home WiFi from the new devices.
- Make sure that you have the latest version for the App. We are updating the App to make sure that your experience will be the best.
- You can always reset your device by pressing the button on the black button of the main console for 5 seconds. The device will reset the Wi-Fi connection and will be ready for the re-onboarding.

Why does the device lose internet connection? (Blinking Violet)?

The possible reason is that the range distance to the router is too large. Bring the dispenser closer to the router or install a Wi-Fi Repeater in your home Wi-Fi network.

How to remove the refill?

To replace the empty refill please follow instructions on page 4 step 3. Avoid touching the spill detergent and in case you touch please clean your hands with water.

What can I do when my device is leaking?

Never disconnect a not fully emptied refill unit from the white dosing unit, to avoid leakage and contact with the cleaning fluids. If the product is leaking, please contact Henkel Customer Service in Germany (0800)1112290; in U.S.A. (800) 457-8739.

What should I do if the battery from Somat Smart console is empty?

In case battery is running empty, the device LED button will blink red. New battery is available with the purchase of the new refill cartridge.

Battery that is used in the console of Somat Smart is a non-rechargeable battery. Do not recharge!

Why couldn't I set up my device? I have been trying this for many times?

There are multiple reasons why you may not be able to connect the dispenser to the Wi-Fi:

- The most seen issue is that you have typed in the wrong Wi-Fi password.
- Another likely reason can be that the smartphone can find the home Wi-Fi, but the dispenser cannot. It would be helpful to bring the dispenser closer to the router.

c. It might be also possible that you have activated a firewall, or the router is limited to use for web browsing. The diffuser needs a free/unlimited access to the internet to work. It could be stuck in setup, if the access is limited.

d. Another reason might be that the connection to the backend server fails during setup. In this case, please try to set it up again.

e. If you see that dispenser is set up (stopped blinking blue and violet) but your setup process in the App is not completed, try to go to the settings of the phone and check if it has reconnected to your home Wi-Fi.

» **Dispenser is still blinking blue and violet** – the device is still in the setup mode. Probably the settings were not sent properly or the WiFi password was not correct. You should repeat the installation process.

» **No LED.** Press the black button on the bottom of the console to check the dispenser status.

- If it is blinking green – the device is configured as offline. To onboarded it in the app, press the button for 5 seconds and initiate the onboarding in the app.
- If it is blinking blue – the device is connected to the Wi-Fi. However, make sure that the WiFi provides a proper signal with the Internet.
- If it is blinking violet – the device is trying to connect to the WiFi, but cannot succeed due to lack of the WiFi signal or wrong password.

Can I use Somat Smart without being connected to the app? If so, how to do it step by step?

To enjoy and use Somat Smart, we strongly recommend using with the App even though you can use the device offline with certain limitations. (e.g. Set Customized Cleaning Modes, See Remaining Number of Washing Cycles. Reorder Refill Automatically, Get Reminder for Machine Cleaning & Dishwashing Tips).

If you still want to use Somat Smart without the app, just plug in the battery and leave it for five minutes, until the LED light stops blinking blue/violet. The device will go into the offline mode, afterwards you can place it in a dishwasher.

What is the difference between a 'one-time' and 'regular' modes?

Regular modes are repetitive for any next wash. They were designed especially for the daily usage. One-time modes were created for the special occasions. They will only be used once, and the device will automatically to back to the regular mode in the next cycle.

How can I change a mode?

Use the Somat Smart app to change the mode before any wash. Once the wash cycle has been started there is no possibility to change the mode, as the algorithm is prepared at the beginning of the wash cycle.

What mode is set, when I use the device without an app?

The standard mode for 25 Wash cycles per cartridge.

Is the LED on the device always active while using? Or is the LED light only active in application stage?

The LED is on only when it is in the setup mode, or when user wakes the device app by pressing the button on the bottom of the console.

Can I use Somat Smart in every dishwasher?






You can use it in every dishwasher. Make sure that the device does not block the spray arms of your dishwasher. If you are not sure check before starting by giving the spray arm in the top and bottom a little kick. They should not touch your device.

Can I use Somat Smart with any kind of dishwasher cleaning cycle?

We recommend using the Eco cycle on your dishwasher. The Eco cycle is the most efficient cycle in terms of energy and water consumption and performance. Of course, Somat Smart works in every cycle (except the pre-wash). Somat Smart adapts to the chosen cycle and dispenses the right amount of detergents at the right time.

Do I have to fill in salt and rinse?

Up to a water hardness of 21°Gh you don't need to fill in salt. Anyway, if you have salt in the salt container it does not negatively influence the performance. Somat Smart contains rinser in a separate compartment and doses the rinser at the right time in the dishwashing cycle. Therefore, you don't need to refill the rinse aid compartment. If you still have rinser in the compartment, please reduce the dosage to the minimum amount to avoid any overdosage or disable dosage. Please refer to your dishwasher's manual.

GENERAL DATA	APPROVAL DATA	PHONE	Printing material:	
DIE CUT / SIZE (mm) 458 x 197 mm	Responsible person marketing Ekaterina Cherneyko	+49 211 797 9804	<input checked="" type="checkbox"/> white <input type="checkbox"/> transparent <input type="checkbox"/> silver <input type="checkbox"/> direct printing	
IDH no. xxxxxxx	Date of approval by marketing xx.xx.2020		Packaging colour: -	
Material no. xxxxxxx	Responsible person IPD N. N.	+49 211 797 xxx	Basic Pack. Mat. No.: - Mailing list: HOME / LAUNDRY	
Product Somat DWC IL	Responsible person country N. N.	+49 211 797 xxx	USED PANTONE TONES ARE JUST INDICATORS!	
Country DACH	Date of 1. approval xx.xx.2020		Colors Printing process	Colors Printing process
Status correction	Date of 2. approval xx.xx.2020		 cyan <input type="checkbox"/>	<input type="checkbox"/>
Creation date 27.02.2020	Delivered by PG MR AD	HOME	 magenta <input type="checkbox"/>	<input type="checkbox"/>
Correction date 11.03.2020	Responsible person LSD Jennifer Zobel	+49 211 74849 471	 yellow <input type="checkbox"/>	<input type="checkbox"/>
EAN (please check) -	Printing company Xxx		 black <input type="checkbox"/>	<input type="checkbox"/>
EAN size -	LSD job no. L-P-003738		<input type="checkbox"/>	<input type="checkbox"/>
Short Code -	LSD FILE NAME:		<input type="checkbox"/>	<input type="checkbox"/>
SEAL ID 30174893	DACH_SOM_DWC_IL_Smart_Starter_Refill_Kit_0220.indd		<input type="checkbox"/>	<input type="checkbox"/>
SEAL ID CS XXXXXXXX	INFOS: -		<input type="checkbox"/>	<input type="checkbox"/>
LOGO OF PRINTING COMPANY		TO BE COMPLETED BY PRINTING COMPANY		
		corrections <input type="checkbox"/> yes* <input type="checkbox"/> none * if yes please do provide a detailed description of all changes made		
		These files have been set up without trapping parameters or any other print options. Please adapt the data according to your usual guidelines and/or profiles.		
		 LSD GmbH & Co. KG In der Steele 11-13 40599 Düsseldorf Tel. +49 211 74 84 90 Fax +49 211 74 84 94 10		
		5 cm		

For more information on Somat Smart, please visit www.somatsmart.com

BATTERY TYPE: CR17450 3V

- Each Starter Kit contains a special battery to be used in the console of Somat Smart device.
- In case battery is running empty, the device LED will blink red.
- New battery is available with the purchase of the new refill cartridge.
- Battery is a non-rechargeable battery. Do not recharge!
- Exhausted batteries are to be removed from the appliance and safely disposed.
- The battery must not be disposed with normal household waste.
- Please hand over the battery and/or the old device to the dedicated collection point for the recycling of electronic devices.
- By disposing it properly, you contribute to environmental protection and avoid potential accident hazards that can arise from improper disposal of the product.
- For more information on how to recycle and dispose the device, contact your local authorities or the city's garbage disposal service.
- If the appliance is to be stored unused for a long period, the batteries should be removed. You can purchase the 2400 mAh battery - type: CR17450 3V from Amazon.

CHILDREN

- This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved.
- Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.

USAGE

- This appliance is intended to be household and indoor used only.



Liquids: 562 ml e
Blue pearls | Deo-Pearls®: 6 g

DE: Henkel Wasch- und Reinigungsmittel GmbH, D-40191 Düsseldorf, Notruf-Nr.: 0211/797-3350
AT: Henkel Central Eastern Europe GmbH, Erdbergstraße 29, A-1030 Wien, Tel.: 01/711040
CH: Henkel & Cie. AG, Postfach, CH-4133 Pratteln 1, Tel.: 0800/552350

WARNING

BLUE PEARLS: May cause an allergic skin reaction. Contains: Linalyl acetate.
BLUE LIQUID, RED LIQUID: Causes serious eye irritation.
YELLOW LIQUID: May produce an allergic reaction. Contains: Protease, Amylase

If medical advice is needed, have product container or label at hand.
Keep out of reach of children. Wear protective gloves.
IF ON SKIN: Wash with plenty of water.
IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do. Continue rinsing.
IF EYE IRRITATION PERSISTS: Get medical advice/attention. Dispose of contents/container in accordance with national regulation.

INGREDIENTS:
5-15% phosphonates, polycarboxylates
< 5% anionic surfactants, non-ionic surfactants
Further ingredients: Enzymes, preservation agents, Phenoxyethanol, Perfumes

Apple und das Apple Logo sind Marken von Apple Inc., die in den USA und anderen Ländern eingetragen sind. App Store ist eine eingetragene Dienstleistungsmarke der Apple Inc.
Android, Google Play und das Google Play-Logo sind Marken der Google Inc.

Apple and the Apple logo are trademarks of Apple Inc., registered in the US and other countries. App Store is a registered service mark of Apple Inc.
Android, Google Play and the Google Play logo are trademarks of Google Inc.

www.cleanright.eu

UN 3091
Verbraucherhotline: 0800 111-2290

Caution:

The user is cautioned that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules and Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC & IC Radiation Exposure Statement:

This equipment complies with FCC and Canada radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. **This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.**

Déclaration d'IC sur l'exposition aux radiations:

Cet équipement est conforme aux limites d'exposition aux radiations définies par le Canada pour des environnements non contrôlés. Cet émetteur ne doit pas être installé au même endroit ni utilisé avec une autre antenne ou un autre émetteur. **Cet équipement doit être installé et utilisé à une distance minimum de 20 cm entre l'antenne et votre corps.**

GENERAL DATA	APPROVAL DATA	PHONE	Printing material: <input checked="" type="checkbox"/> white <input type="checkbox"/> transparent <input type="checkbox"/> silver <input type="checkbox"/> direct printing
DIE CUT / SIZE (mm) 458 x 197 mm	Responsible person marketing Ekaterina Cherneyko	+49 211 797 9804	Packaging colour: -
IDH no. xxxxxxx	Date of approval by marketing xx.xx.2020		Basic Pack. Mat. No.: - Mailing list: HOME / LAUNDRY
Material no. xxxxxxx	Responsible person IPD N. N.	+49 211 797 xxxx	USED PANTONE TONES ARE JUST INDICATORS!
Product Somat DWC IL	Responsible person country N. N.	+49 211 797 xxxx	
Country DACH	Date of 1. approval xx.xx.2020		Colors Printing process Colors Printing process
Status correction	Date of 2. approval xx.xx.2020		<input type="checkbox"/> cyan <input type="checkbox"/>
Creation date 27.02.2020	Delivered by PG MR AD	HOME	<input type="checkbox"/> magenta <input type="checkbox"/>
Correction date 11.03.2020	Responsible person LSD Jennifer Zobel	+49 211 74849 471	<input type="checkbox"/> yellow <input type="checkbox"/>
EAN (please check) -	Printing company Xxxx		<input type="checkbox"/> black <input type="checkbox"/>
EAN size -	LSD job no. L-P-003738		<input type="checkbox"/> varnish gloss
Short Code -	LSD FILE NAME:		<input type="checkbox"/> printing area (does not print)
SEAL ID 30174893	DACH_SOM_DWC_IL_Smart_Starter_Refill_Kit_0220.indd		<input type="checkbox"/> die cut (does not print)
SEAL ID CS XXXXXXXX	INFOS: -		
	LOGO OF PRINTING COMPANY		
	TO BE COMPLETED BY PRINTING COMPANY		
	corrections <input type="checkbox"/> yes* <input type="checkbox"/> none		
	* if yes please do provide a detailed description of all changes made		
		Kind regards, LSD GmbH & Co. KG	
		5 cm	
			LSD LSD GmbH & Co. KG In der Steele 11-13 40599 Düsseldorf Tel. +49 211 74 84 90 Fax +49 211 74 84 94 10

www.somatsmart.de



GENERAL DATA	APPROVAL DATA	PHONE	Printing material: <input checked="" type="checkbox"/> white <input type="checkbox"/> transparent <input type="checkbox"/> silver <input type="checkbox"/> direct printing	
DIE CUT / SIZE (mm) 458 x 197 mm	Responsible person marketing Ekaterina Cherneyko	+49 211 797 9804	Packaging colour: -	
IDH no. xxxxxxx	Date of approval by marketing xx.xx.2020		Basic Pack. Mat. No.: -	Mailing list: HOME / LAUNDRY
Material no. xxxxxxx	Responsible person IPD N. N.	+49 211 797 xxxx	USED PANTONE TONES ARE JUST INDICATORS!	
Product Somat DWC IL	Responsible person country N. N.	+49 211 797 xxxx	Colors cyan	Printing process <input type="checkbox"/>
Country DACH	Date of 1. approval xx.xx.2020		Colors magenta	Printing process <input type="checkbox"/>
Status correction	Date of 2. approval xx.xx.2020		Colors yellow	Printing process <input type="checkbox"/>
Creation date 27.02.2020	Delivered by PG MR AD	HOME	Colors black	Printing process <input type="checkbox"/>
Correction date 11.03.2020	Responsible person LSD Jennifer Zobel	+49 211 74849 471	<input type="checkbox"/>	<input type="checkbox"/>
EAN (please check) -	Printing company Xxx		<input type="checkbox"/>	<input type="checkbox"/>
EAN size -	LSD job no. L-P-003738		<input type="checkbox"/>	<input type="checkbox"/>
Short Code . -	LSD FILE NAME:		<input type="checkbox"/>	<input type="checkbox"/>
SEAL ID 30174893	DACH_SOM_DWC_IL_Smart_Starter_Refill_Kit_0220.indd		<input type="checkbox"/>	<input type="checkbox"/>
SEAL ID CS XXXXXXXX	INFOS: -		<input type="checkbox"/>	<input type="checkbox"/>
LOGO OF PRINTING COMPANY	TO BE COMPLETED BY PRINTING COMPANY		<input type="checkbox"/>	<input type="checkbox"/>
	corrections <input type="checkbox"/> yes* <input type="checkbox"/> none		<input type="checkbox"/>	<input type="checkbox"/>
	* if yes please do provide a detailed description of all changes made		<input type="checkbox"/>	<input type="checkbox"/>
			These files have been set up without trapping parameters or any other print options. Please adapt the data according to your usual guidelines and/or profiles.	
			LSD GmbH & Co. KG In der Steele 11-13 40599 Düsseldorf Tel. +49 211 74 84 90 Fax +49 211 74 84 94 10	
			Kind regards, LSD GmbH & Co. KG 5 cm	