



**F400**

**315/433MHz**

**Antenna**

**PN: SZ21488IA67**

**Key features:**

- Antenna for 315MHz and 433MHz .
- High gain.
- Sustained High Efficiency and Performance.
- Impedance 50 Ohm.

**Sunnyway Technology (CHINA)**

Add: 1F, Building 4, No.215-99, GaoGuang Road, QingPu District, Shanghai, China

Tel: +86-021-6083 5368

Fax: +86-021-6484 2328

Email: sales@sunnyway-iot.com

Web: www.sunnyway-iot.com

*catalogs*

1. Specifications..... - 3 -

2. S11..... - 3 -

2.1 VSWR..... - 3 -

2.2 Smith ( R+JX) ..... - 3 -

3. Performance data..... - 4 -


4. Drawing (Unit: mm)..... - 5 -

## 1. Specifications


Item		Specifications	
<b>Antenna</b>	Frequency range (MHz )	315MHz	433MHz
	Max Gain (dBi )	-5.56	-4.48
	VSWR	2.7under	1.6under
	Efficiency (%)	16.24%	22.10%
	Output impedance ( $\Omega$ )	24	46

## 2. S11

### 2.1 VSWR

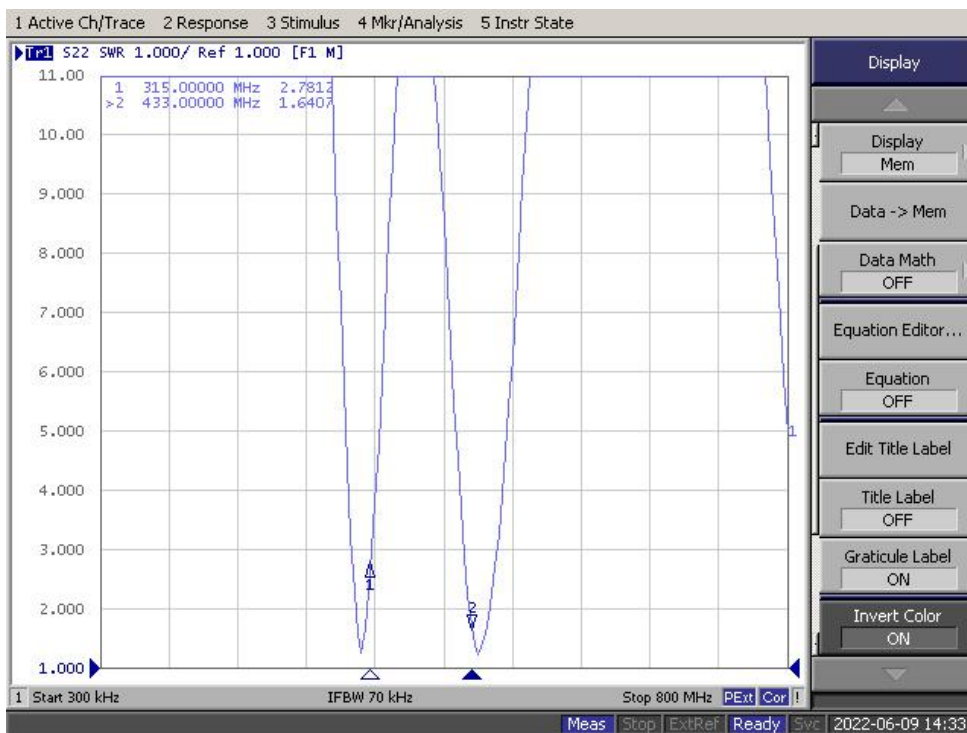

## 2.2 Smith(R+JX)

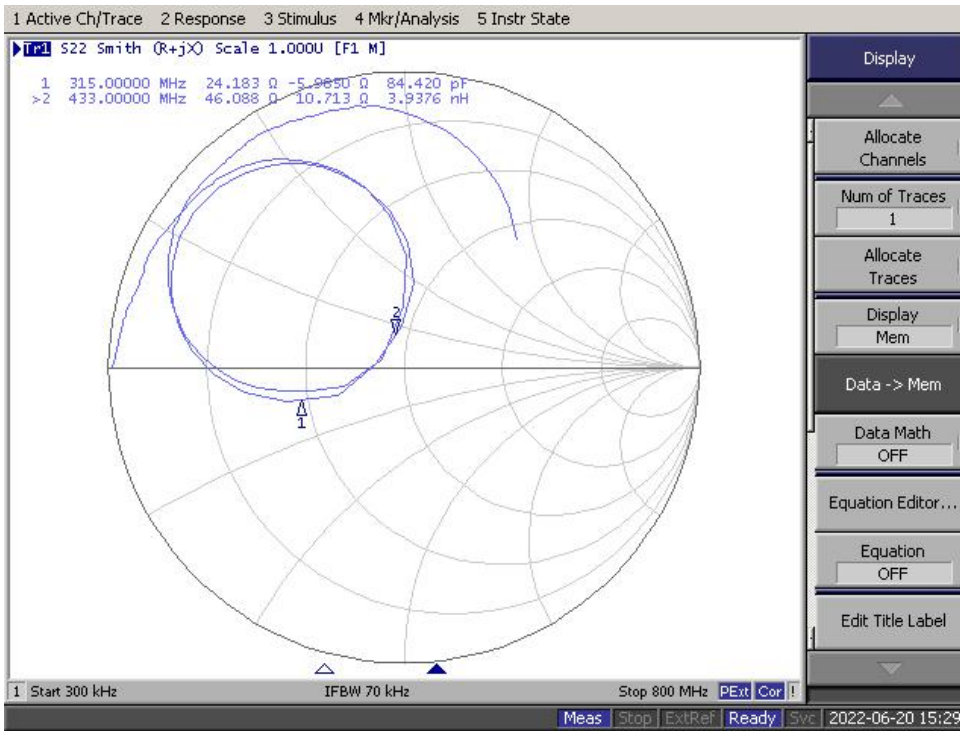

## 3. Performance data

### Passive test data

Freq (MHz)	Effi (%)	Gain (dBi)
300	15.28	-6.02
305	15.62	-5.89
310	16.41	-5.43
315	16.24	-5.56
320	16.61	-5.47
325	15.86	-5.8
330	15.75	-5.91
335	15.23	-5.99

Freq (MHz)	Effi (%)	Gain (dBi)
425	18.56	-5.12
426	18.47	-5.1
427	19.26	-5.02
428	19.57	-4.94
429	20.12	-4.89
430	21.21	-4.76
431	22.12	-4.63
432	22.45	-4.54
433	22.1	-4.58
434	21.36	-4.87
435	20.85	-4.89

4. Drawing (Unit: mm)

