



55 mm

80 mm

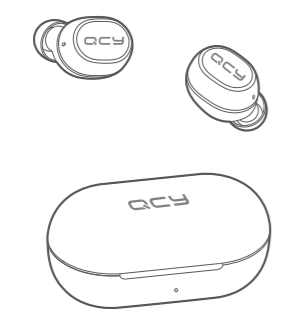

QCY


QCY-T4
Mini TWS Bluetooth Earbuds




Instruction Video

Overview

Choose Your Eartips
Please try medium eartips first as they fit most people.



L M S

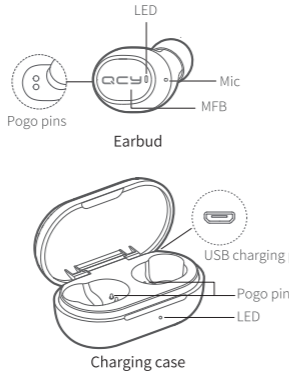


Earbud

Charging case

How to Pair


First Time Pairing:
1. Pick up both earbuds, pop both earbuds into the case to activate them.
2. Pick up both earbuds again.
3. On cellphone, search for QCY-T4 and tap to connect.
*Once paired earbuds will auto power on upon picking up from the case. If earbuds fail to auto power on, please charge them and try again.

Switch Paired Device:
1. Turn off phoneA's Bluetooth faculty and earbuds will auto disconnect and enter into pairing mode.
2. On phoneB, search for QCY-T4 and tap to connect.
*Multi-point connection is not available. Earbuds will auto reconnect to phoneB upon powering up again.




Factory Setting

(Try the following steps to fix connectivity issue)
Set to factory:
1. On cellphone, search for QCY-T4, tap and choose ignore or cancel pairing.
2. Pick up two earbuds, keep touching both bars for 8s or until LEDs blink red and green 3 times to power off.
3. Keep touching both bars for 10s or until LEDs blink red and green 3 times then blink red to set earbuds to factory.
*Please refer "First Time Pairing" to connect after factory setting. Manual Pairing (please refer the following steps in case two earbuds lose connection)
Power off earbuds then keep touching panels for 5s or until LEDs blink red and green. After then, double touch panels and LEDs will blink red and green. Two earbuds will then auto pair with each other when left LED blinks red and green and the other one turns off.

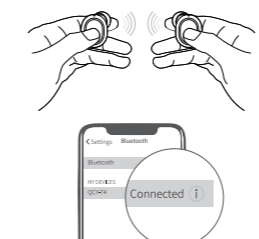

How to Wear



1. Rotate earbud and pop it into your ear then shake head to check wearing stability.
2. Please adjust mic towards your mouth to gain better calling experience.

Three-way Calling & Swith
Press MFB to answer incoming call. If another call is coming in sync, press MFB to put the first call on hold while activating the second call or hold MFB to ignore the second call. Double press MFB to switch between held call and active call.

Mono Mode

1. Power off earbuds, keep touching either panel for 5s to enter pairing mode (LED blinks red and green).
2. On cellphone, search for QCY-T4 and tap to connect.
3. Connected.

Charging Earbud
Push earbuds into case and earbuds will auto be charged. LEDs will glow solid red when charging and turn green for 1 minute once topped up.

Charging the Case
Charge the case via USB cable.
LED:
Battery level ≤60%: solid red
Battery level 60%-95%: solid green
Battery level ≥95%: solid white

Parameter
Bluetooth version: V5.0 Standby time: approx. 70hr
Charging time: approx. 2hr Music time: approx. 4.5hr
Operation range: 10m(with no obstacle)
Talk time: approx. 4hr
Battery type: li-ion
Battery capacity(earbud): 3.7V 43mAh
Battery capacity(case): 3.7V 380mAh
Input parameter(case): 5V 300mA
Bluetooth profiles: HSP/HFP/A2DP/AVRCP

Function Introduction

Functions	Current status	Operation/result	LED	Prompt
Power-on	Power-off	Hold MFB for 1s	LED glows green for 1s	TONE
	Charging	Pick up earbuds from case	LED glows green for 1s	TONE
Power-off	Power-on	Hold MFB for 3s (two earbuds will power off together in case they are not connected to device)	LED glows red for 2s	TONE
		Pull back into case	LED glows solid red	TONE
Factory setting	Power-off	Hold MFB for 10s	LED blinks red and green 3 times	TONE
Answer/end call	Incoming call/calling	Press MFB	\	TONE
Ignore call	Incoming call	Hold MFB for 1s	\	TONE
Voice assistant	Connected	Hold MFB for 1s	\	TONE
Mute on/off	Calling	Double press MFB	\	TONE
Music pause/resume playing	Playing	Press MFB	\	\
Skip track	Playing	Double press MFB on right/left earbud to skip track forward/backward	\	\
Switch call to earbud	Call handled by phone	Hold MFB for 1s	\	TONE
Switch call to phone	Call handled by earbuds	Hold MFB for 1s	\	TONE

Warranty Card

Warranty Period
12 months after you purchase this item.(or you may inquire your local shopper for more details.)
Free Service:
Supposing any defects caused by quality issues occur within the warranty period, please take this warranty card and purchase receipts to your distributor for free exchange service.

Model Number:
Date of Purchasing:
User's Name:
User's Phone:
User's Address:
Shop's Name:
Shop's Address:
Comments:

Free exchange service will not be accessed under following circumstances:
1. Damages caused unauthorized disassembly.
2. Defects or physical damages caused by leaking or dropping off.
3. Damages by act of God. Supposing your item is within any damages or defects except the above circumstances, please return to us or your distributor for free repairing.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Hazardous substances and their contents in the item

Part Name	Hazardous Substances									
	Pb	Hg	Cd	Cr(VI)	PBB	PBDE	DEHP	DBP	BBP	
Main body	X	O	O	O	O	O	O	O	O	O
Battery	O	O	O	O	O	O	O	O	O	O
Ear tips	O	O	O	O	O	O	O	O	O	O
Accessories	O	O	O	O	O	O	O	O	O	O
Charging cable	X	O	O	O	O	O	O	O	O	O

This form is made by SJ/T 11364 regulation.
O: means that hazardous substance content in the homogeneous materials of this part is within the limits of (EU) 2015/863 regulation.
X: means that hazardous substance content in ,at least, one certain homogeneous material of this part is beyond the limits of (EU) 2015/863 regulation ,but there is no mature alternative in the industry at present, it still conforms to the EU ROHS Directive in the scope of exemption.

Notes: Please arrange using time properly as your hearing may be damaged by using the device for a long time.
Manufacturer: Dongguan Hele Electronics Co., Ltd.
Address: Daojiao Town, Dongguan City, Guangdong, China


Tips

1. Before using the headset, please read the manual carefully and keep it for future references.
2. The headset need to be fully charged prior to first-time use.
3. If the headset is left unused for over two weeks, please recharge it periodically.
4. Please use the chargers made by qualified manufacturer.
5. If the headset cannot be found by your phone, please check whether it is in pairing mode; if left unconnected for a long while, the headset will exit pairing mode, please re-enter the mode; if a procedure error of your phone occurs, reboot it; if a procedure error of the headset occurs, reboot or reset it.

Caveats

1. Never disassemble or modify your headset for any reasons to avoid any damages and danger.
2. Do not store the headset in extreme temperatures (under 0°C or over 45°C).
3. Avoid using the indicator close to the eyes of children or animals.
4. Do not use this headset during a thunderstorm to avoid irregular function and increased risk of electric shock.
5. Do not use harsh chemicals or strong detergents to clean the headset.
6. Keep the headset dry.

FCC ID: 2AW44-BCT01



330 mm