

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

The device has been evaluated to meet general RF exposure requirement.


The device can be used in portable exposure condition without restriction.

# User Manual

S66+  
Touch sound lamp



### Operation Image:

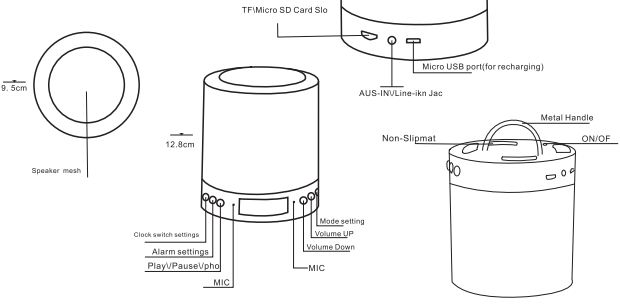

Material	ABS + Metal
Lamp Power	1.6W
Lumen	160LM
Color	Warm white
LED Size	2835
Battery L-Ion	3.7V
Speaker output power	3W
Driver Unit	φ 52mm, 4Ohm,3w
Frequency Response	90HZ—20KHZ
Transmission Range	10 meter
Product dimension	φ 95mm * 128 mm
Audio input	3.5mm jack cable
frequency	2.402GHZ—2.48GHZ
Input power	Input DC5V/500mA

**Playing time after fully charged:**  
10 hours music playing for normal 70% volume, 10 hours lighting lamp on highest brightness

**Power switch:**  
Long press to turn it on or off. The speaker will first enter Bluetooth Mode ;Press Mode switch to turn Lighting Mode when the speaker is on, light will be on by soft touch .Bluetooth Mode will instantly switch when click the Mode button icon (TF Card Music Playing will automatically switch when inserted TF card).Voice Prompts will sound before bluetooth pairing and TF card music playing

**Button icon:**

**2,Bluetooth music mode:**  
Short press + to play the next song and long press to volume up.  
Short press - to play the previous song and long press to volume down.

**3,Hands free calling:**  
Answer and hang up the phone:  
There will be an alert sound from the speaker when there is a phone call. Click to answer the call, and click again to hang up .

**4,TF card music playing:**  
Enter TF card music playing mode automatically when TF card inserted  
Short press + to play the next song and long press to volume up.  
Short press - to play the previous song and long press to volume down.  
Music playing or pause by click   
Bluetooth mode will switch by click the MODE button when on TF card music playing mode

**5,AUX IN audio input mode:**  
Inserting the 3.5 mm aux in cable, the speaker can be an external audio when connected with mobile phone, PC, tablet,mp3.  
In Aux in audio input mode, + to volume up, - to volume down, other buttons are out of use.  
In any mode, when inserted 3.5 mm audio in cable, the speaker self identified and automatically switch to audio in input mode.

**Indicator light:**  
**1,Bluetooth indicator:**

The Bluetooth indicate light will flash rapidly when in impairing state,the blue light flash slowly means bluetooth connected, the speaker enter bluetooth music playing.

**2,TF card music playing indicator:**  
The speaker enter TF card music playing when blue indicate light flash in TF card playing mode

**3,Charging:**  
1,Please make sure the speaker is fully charged in first use. Charge the speaker with the provided USB cable which is compatible with any computer or cell phone 5 V output charger. The charge indicator light will be red while charging, then when the battery is fully charged it will turn off.  
2,Charge time :about 4 hours

**Bluetooth mode:**  
**1,Bluetooth connection:**  
This speaker supports the bluetooth device with A2DP function.Slide the power switch first,then enter bluetooth mode,bluetooth indicate blue flicker alternately,together with voice prompts,the speaker is in impairing state at this moment,and only in the state bluetooth can be impaired and connected successfully.  
**2,Mobile phone connection:**  
**Step 1:** Open the Bluetooth setting on your phone or tablet and click "search device". Iphones will search for Bluetooth devices automatically.  
**Step 2:** You have found the Bluetooth speaker when the screen displays the character " ",click on it in your device to pair the connection.  
**Step 3:** Enter "0000" and click OK if there's a prompt that requires you to enter a password.  
**Step 4:** The phone or tablet will indicate when the pairing is successful. The character on the display of the speaker will stop flickering.

**3,Computer connection:**  
Activate the bluetooth function first if the computer has bluetooth device.It's necessary to install the bluetooth driver and plug in the bluetooth adapter when there is no bluetooth available  
**Step 1:**Click the bluetooth icon at the lower right the computer by mouse right button,choose"device adding"  
**Step 2:**Bluetooth adapter will search for the speaker automatically,and the screen displays the character " "

**Step 3:**The computer will install the driver automatically after double click the character " ",and display driver install successfully.  
**Step 4:**Double click the bluetooth icon,the speaker connects the computer successfully and be in use.Please check the computer audio device has switched to bluetooth mode or connected well if the speaker still can not play music successfully.  
**Bluetooth pairing and connection**  
1. If the speak has been connected with Bluetooth devices before, it will connect with the last Bluetooth device

automatically once it is turned on.  
2.If the speak has not been connected with Bluetooth devices before,it will enter impairing mode,click connecting is achievable  
3.Other phones or tablets can not be connected with the Bluetooth speaker when the speaker is being connected with a phone or tablet.  
4.The phone or tablet can not be connected with the Bluetooth speaker if it is connected with other Bluetooth devices. You should turn off your Bluetooth connection and connect your phone with the Bluetooth speaker again.

**Lamp function**  
Long Press the switch of the speaker on the bottom. Turn on the light by tap the mesh on the top, and the lamp will light on in the dimmest grade one. The brightness can be adjusted by tap the top mesh, and there are 3 brightness grades: low brightness , intermediate brightness, and high brightness. Tapping the top mesh when in high brightness, the light will be off.

**Frequently Asked Questions**

Questions	Solutions
<b>Unsuccessful pairing and connection repeatedly</b>	1.Check the speaker and make sure it is in the searching state or reboot the speaker. 2. Connection is difficult when there are too many Bluetooth devices nearby. Turn off other Bluetooth devices. 3.Turn off the Bluetooth device that was connected with the Bluetooth speaker last time, and reconnect the speaker .
<b>Muted or distorted sound</b>	1.Check the volume of your phone or the speaker, and adjust the volume. 2.The battery is low. Please charge it.
<b>Choppy music play</b>	1. Check if the device is beyond the effective connection distance. 2. Check if there is any obstacle between the speaker and your device.
<b>The indicator not shining in Bluetooth mode</b>	1.The battery is low. Please charge it. 2.Please reboot the speaker.