
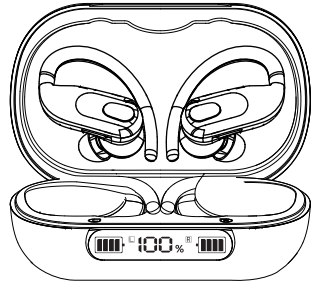
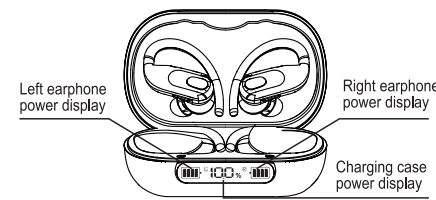
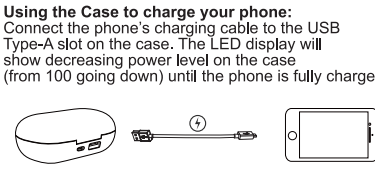
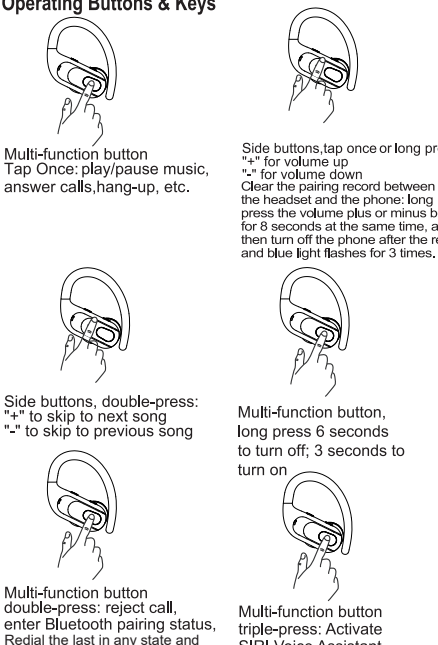


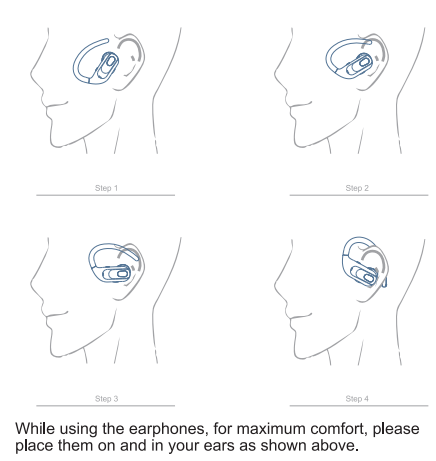

<p style="text-align: center;">User Manual</p> <p style="text-align: center;">F6 Wireless Earphones</p> 	<p>Initial Usage</p> <ol style="list-style-type: none"> Opening the charging case will automatically turn on the earphones. The earphones quickly enter pairing mode, red and blue lights flashing alternately. Turn on your phone's Bluetooth and look for "F6" on the device list. Tap on it. Red and blue lights go off after successful connection. <p>Subsequent Usage</p> <ol style="list-style-type: none"> Auto-Disconnection Put the earphones inside the charging case and close the case to enter the charging mode. Bluetooth will be automatically disconnected. Auto-Reconnection After the initial use, you can use the earbuds by simply opening the charging case. The earbuds will automatically reconnect to your phone, even before you take it out of the case. Note: After opening the case, if the headset is not connected to a device, it will turn off after 5 minutes. <p style="text-align: center;">-1-</p>	<p>Smart Charging</p> <p>Before using the item for the first time, it is recommended to place the earphones inside the case and charge them until they reach full charge.</p>  <p>Left earphone power display Right earphone power display</p> <p>Charging case power display</p> <ol style="list-style-type: none"> Charging for Earphones: Put the earphones inside the charging case and close the cover. They will automatically enter charging mode. Note: Please place the earphones into the charging case smoothly with gentle push. Prevent the earphones from being in poor contact with the charging probe, which may result in failure to charge. <p style="text-align: center;">-2-</p>	<ol style="list-style-type: none"> Charging for Case: After inserting the charging cable into the USB Type-C port on the case, the case will automatically start getting charged. The LED screen will display an incremental change of power from 0 to 100 during charging. 100 indicates full charge. Using the Case to charge your phone: Connect the phone's charging cable to the USB Type-C port on the case. The LED display will show decreasing power level on the case (from 100 going down) until the phone is fully charged.  <p>Low Battery Alert The alarm starts 20%, there is a prompt sound, prompt in 3 minutes, and the third shutdown. Red light flash slowly.</p> <p>Clear Pairing Records Press and hold volume up and down keys of either earbuds simultaneously for 5s, red and blue lights will light up 3 times at the same time. Then the device will be disconnected, the earbuds will clear pairing records and shut down.</p> <p style="text-align: center;">-3-</p>	<p>Operating Buttons & Keys</p>  <p>Multi-Function button Tap Once: play/pause music, answer calls, hang up, etc. Tap twice: skip forward Tap three times: skip backward Tap and hold: voice assistant</p> <p>Side button, tap once or long press Tap once: play/pause music, answer calls, hang up, etc. Tap twice: skip forward Tap three times: skip backward Tap and hold: voice assistant</p> <p>Side button, double-press "⏪" to skip to next song "⏩" to skip to previous song</p> <p>Multi-function button, long press 8 seconds to turn off Press and hold volume up and down keys of either earbuds simultaneously for 5s, red and blue lights will light up 3 times at the same time. Then the device will be disconnected, the earbuds will clear pairing records and shut down.</p> <p>Multi-function button double-press: reject call, answer Bluetooth pairing status Raise the lid in any side and double click the L/R function key</p> <p>Multi-function button long-press: Activate Siri/Voice Assistant</p> <p style="text-align: center;">-4-</p>	<p>Tip</p> <p>Proper Way of Wearing the Earphones:</p>  <p>While using the earphones, for maximum comfort, please place them on and in your ears as shown above.</p> <p style="text-align: center;">-5-</p>	<p>Specifications</p> <p>Earphones Bluetooth version: 5.3 Working voltage: 3.7V/4.2V RF transmit power: Class 2 Communication distance: 10M Transmission range(H): 2.4G/2.400GHz Auto encoding format: AAC, SBC Support: A2DP1.3, HFP1.1, HSP1.2, AVRCP1.6, SPP1.2 Working temperature: -20to 60 degree Celsius Working humidity: 10%-85% (not-frozen state)</p> <p>Single Earphone: Weight: 5.02g (0g) Size: 1.9*1.8*1.8 inch (4.7*4.1*2.8cm) Battery capacity: 50mAh Charging time: 1-1.2 hours Standby time: 150 hours Playing time: 7-8 hours Talk time: 7-8 hours</p> <p>Charger Case: Weight: 1.29g (10g) Size: 3.9*2.4*1.8 inch (9.9*6.2*4.6cm) Battery capacity: 150mAh Charging time: 3-4 hours</p> <p style="text-align: center;">-6-</p>	<p>Safety Instructions</p> <p>To avoid hearing damage, keep the volume at a moderate level. Listening at high volumes for long periods of time may cause permanent damage to your hearing ability, even deafness. Avoid using the earphones while driving, cycling, crossing the road, or performing/participating in any activity that requires your full attention. Note: The audio and video will be slightly delayed when you are wearing them.</p>  <p>After full charge, please unplug the charging cable from the charging case to avoid leaving the case in charging state for a long time.</p> <p>The output voltage and current of the charger are preferably 5V. If the charger's output voltage exceeds the specified charge, it will cause serious damage to the product, and the product warranty will be invalid in that case.</p> <p style="text-align: center;">-7-</p>	<p>Usage Guide and Precautions</p> <ol style="list-style-type: none"> Please do not use it in environments with large electromagnetic fields / high radiation level. Bluetooth signal will be interfered with. Please do not keep the battery of the earphone is below 10%, which will result in insufficient audio output. It is recommended to use the headset at sufficient battery. In case of obstacles or multiple 2.4GHz signals in the same frequency band, Bluetooth signal will be interfered with, which may occur stuttering operation. Please do not put the Bluetooth earphones in water or apply excessive force on it, which may cause damage to the earphones and degraded sound quality. Please charge the earbuds once every 30 days if it's not used for extended periods of time. Prevents failure to start due to lack of power when needed. We may upgrade or modify the software or hardware and appearance of this product without notice to you. <p style="text-align: center;">-8-</p>	<p>FCC Statement</p> <p>Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.</p> <p>This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.</p> <p>NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, you can eliminate or reduce the interference by one or more of the following measures: - Reorient or relocate the receiving antenna. - Increase the separation between the equipment and receiver. - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. - Consult the dealer or an experienced radio/TV technician for help. The device has been tested to meet general RF exposure requirements. The device can be used in portable exposure condition without restriction.</p> <p style="text-align: center;">-9-</p>	<p>CORRECT DISPOSAL OF THIS PRODUCT</p>  <p>(Waste Electrical & Electronic) This Marking shown on the product or its literature indicates that it should not be disposed with other household wastes at the end of its working life.</p> <p>To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.</p> <p>Household user should contact either the retailer where they purchased this product, or their local government office, for details of where and how the can take this item for environmentally safe recycling.</p> <p>Business users should contact their supplier and check the term and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.</p> <p style="text-align: center;">-10-</p>	<p>Model: F6</p> <p>EC REP Like Sun Green Pavane, 26, 48147 Izernore Dumouriez/Bourgogne, France Téléphone: +33 471 393655</p> <p>UK REP KIVA ASSOCIATES LTD 120 High Street, Bournemouth, Hampshire, PO1 1TB, United Kingdom 01203 200000/01203 200000 Email: kiva@kivaassociates.com</p> <p>EC REP EUBRIDGE ADVISORY GMBH Vingth St. 2, 35583 Buzbach, Germany adv@eubridge.com</p> <p>UK REP TAMMET INTL BUSINESS LTD 8 Thangajayam Road, Chingford, MK8 5BQ, UK 0203 2502 1000 tammet@tammet.com</p> <p>CE UK REP Made in China FCC ID: J245C-F6</p> <p style="text-align: center;">-11-</p>
---	---	--	---	---	---	---	--	--	---	--	---