



Antenna2 Specification (Jeweller, Inverted-F)

Angle, degrees	Freq='915MHz' Phi='0deg' dBi(GainTotal)	Freq='915MHz' Theta='90deg' dBi(GainTotal)	Freq='915MHz' Theta='90deg' dBi(GainTotal)
	Z-X plane	Z-Y plane	X-Y plane
0	-6.17	-6.63	-13.11
10	-6.16	-7.09	-15.45
20	-6.39	-7.81	-17.01
30	-6.85	-8.59	-15.41
40	-8	-9.26	-13
50	-9.36	-9.81	-11.31
60	-10.95	-10.27	-10.35
70	-12.21	-10.62	-10.12
80	-13.36	-10.85	-10.46
90	-13.88	-10.92	-11.19
100	-13.38	-10.8	-12.3
110	-12.7	-10.61	-13.66
120	-10.85	-10.39	-14.76
130	-9.66	-10.03	-14.98
140	-8.45	-9.44	-14.08
150	-7.66	-8.68	-12.39
160	-7.08	-7.86	-10.68
170	-6.13	-7.08	-9.31
180	-6	-6.46	-8.15
190	-6.01	-6.08	-7.09
200	-6.18	-6	-6.31
210	-6.44	-6.18	-6
220	-6.73	-6.5	-6.08
230	-7	-6.88	-6.32
240	-7.18	-7.3	-6.64
250	-7.22	-7.78	-7.18


260	-7.25	-8.25	-7.94
270	-7.42	-8.48	-8.75
280	-7.58	-8.27	-9.48
290	-7.48	-7.8	-9.91
300	-7.16	-7.32	-9.69
310	-6.91	-6.92	-9.46
320	-6.82	-6.57	-9.51
330	-6.77	-6.33	-10.96
340	-6.62	-6.28	-10.48
350	-6.37	-6.4	-11.56

Max antenna gain, dBi	
905 MHz	-6.1
915,85 MHz	-6
926,5 MHz	-6.1

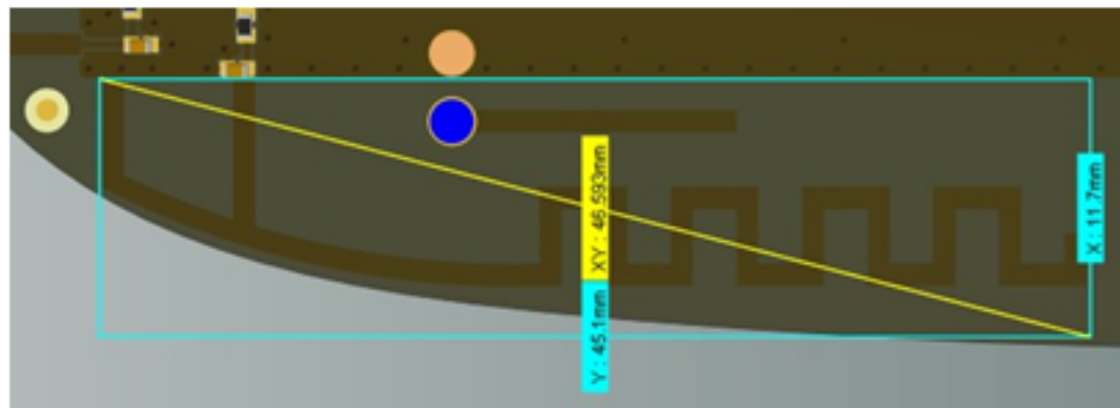


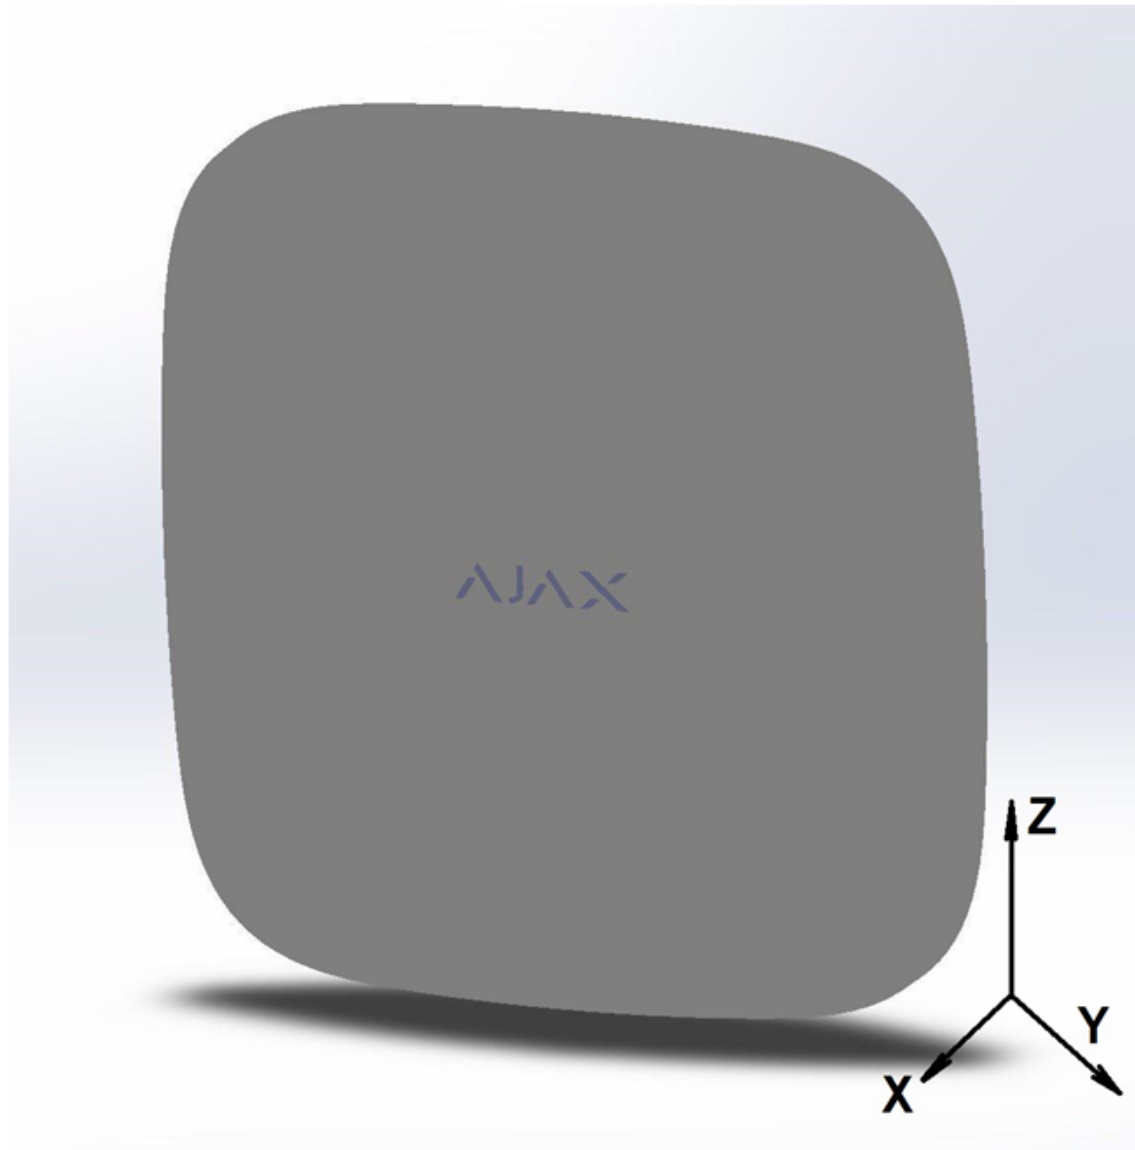

Z-X plane norm

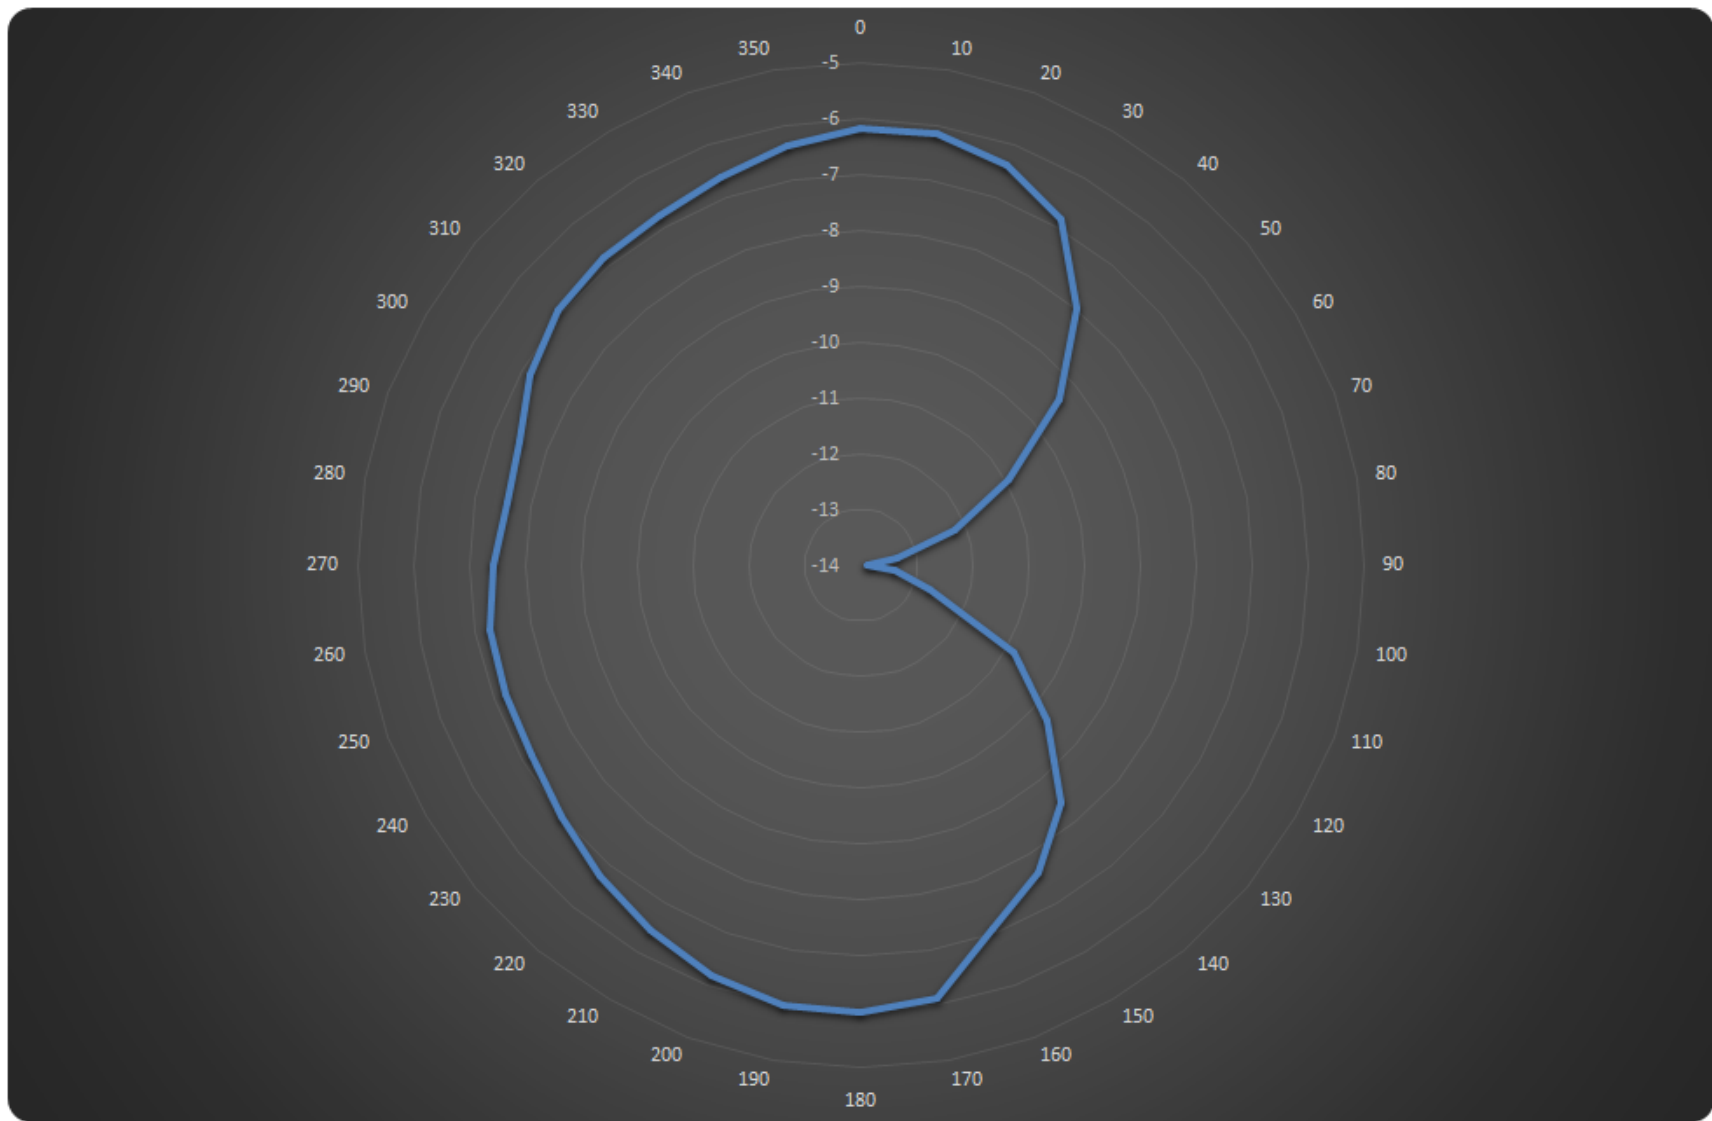

Z-Y plane norm

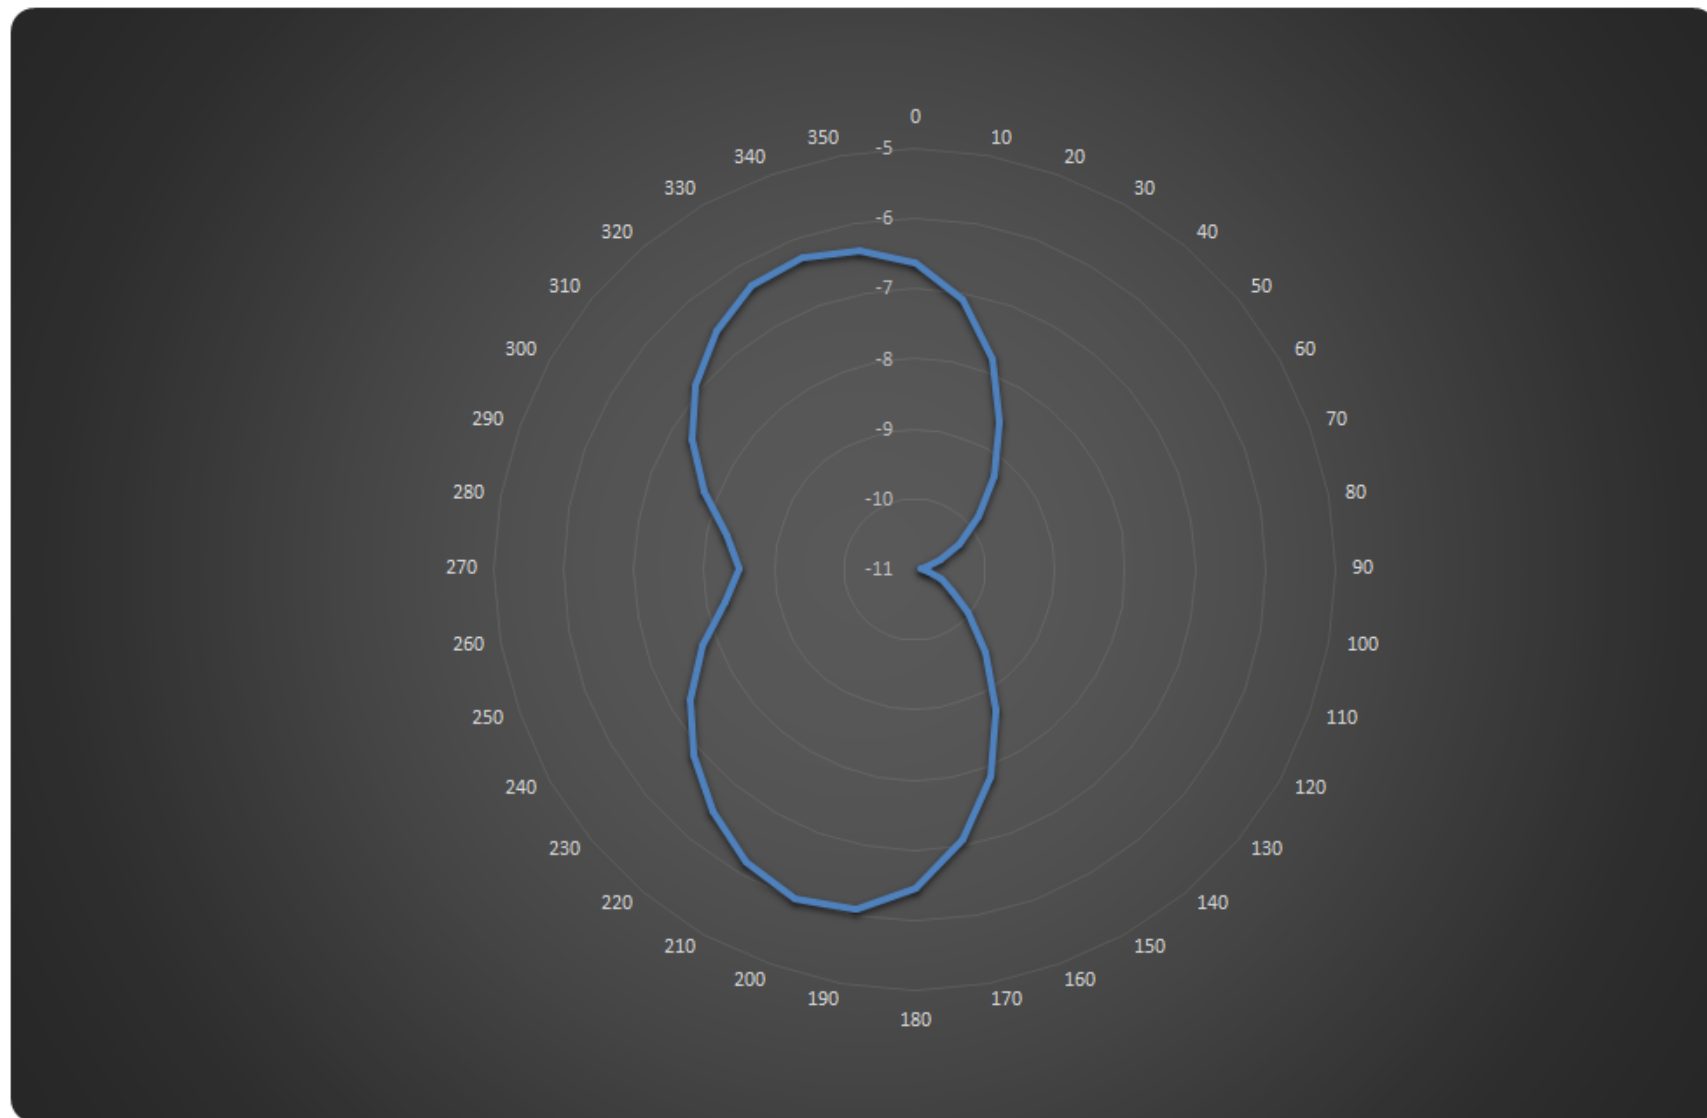

X-Y plane norm

