

Manufacturer's Name : "AJAX SYSTEMS MANUFACTURING" LIMITED LIABILITY COMPANY  
 Address : Sklyarenka, 5, Kyiv, 04073, Ukraine


| Angle, d | Freq=' 915MHz' Phi=' 0deg' | Freq=' 915MHz' | Freq=' 915MHz' |
|----------|----------------------------|----------------|----------------|
|          | dBnormalize(GainTotal)     | Theta=' 90deg' | Theta=' 90deg' |
|          | Z-X plane                  | Z-Y plane      | X-Y plane      |
| 0        | -2.5                       | -2.98          | -14.35         |
| 10       | -2.55                      | -3.21          | -18.34         |
| 20       | -2.92                      | -3.45          | -17.59         |
| 30       | -3.63                      | -3.69          | -13.34         |
| 40       | -4.68                      | -3.9           | -10.03         |
| 50       | -6.07                      | -4.08          | -7.72          |
| 60       | -7.83                      | -4.24          | -6.14          |
| 70       | -9.94                      | -4.35          | -5.13          |
| 80       | -12.21                     | -4.41          | -4.6           |
| 90       | -13.77                     | -4.42          | -4.52          |
| 100      | -13.28                     | -4.36          | -4.86          |
| 110      | -11.21                     | -4.24          | -5.63          |
| 120      | -8.92                      | -4.09          | -6.83          |
| 130      | -6.94                      | -3.9           | -8.46          |
| 140      | -5.33                      | -3.7           | -10.45         |
| 150      | -4.08                      | -3.49          | -12.39         |
| 160      | -3.18                      | -3.27          | -13.24         |
| 170      | -2.6                       | -3.04          | -12.29         |
| 180      | -2.35                      | -2.83          | -10.46         |
| 190      | -2.41                      | -2.63          | -8.62          |
| 200      | -2.77                      | -2.45          | -7.01          |
| 210      | -3.41                      | -2.31          | -5.66          |
| 220      | -4.31                      | -2.2           | -4.54          |
| 230      | -5.43                      | -2.11          | -3.65          |
| 240      | -6.72                      | -2.05          | -2.96          |
| 250      | -8.04                      | -2.02          | -2.47          |
| 260      | -9.21                      | -2             | -2.18          |
| 270      | -9.88                      | -2             | -2.1           |
| 280      | -9.81                      | -2.02          | -2.23          |
| 290      | -9.01                      | -2.06          | -2.58          |


Max antenna gain, dBi

|            |      |
|------------|------|
| 905 MHz    | -2.1 |
| 915,85 MHz | -2   |
| 926,5 MHz  | -2.2 |



|     |       |       |        |
|-----|-------|-------|--------|
| 300 | -7.79 | -2.11 | -3.15  |
| 310 | -6.46 | -2.18 | -3.97  |
| 320 | -5.2  | -2.28 | -5.07  |
| 330 | -4.13 | -2.4  | -6.51  |
| 340 | -3.31 | -2.56 | -8.4   |
| 350 | -2.76 | -2.75 | -10.91 |

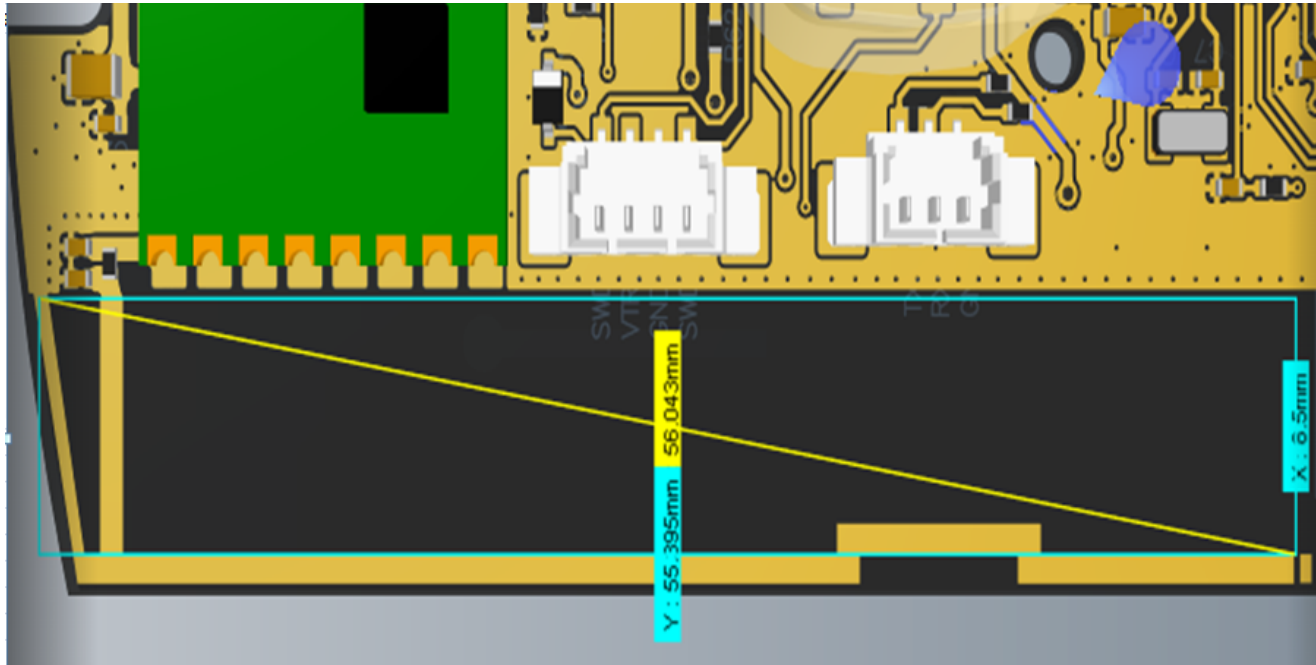

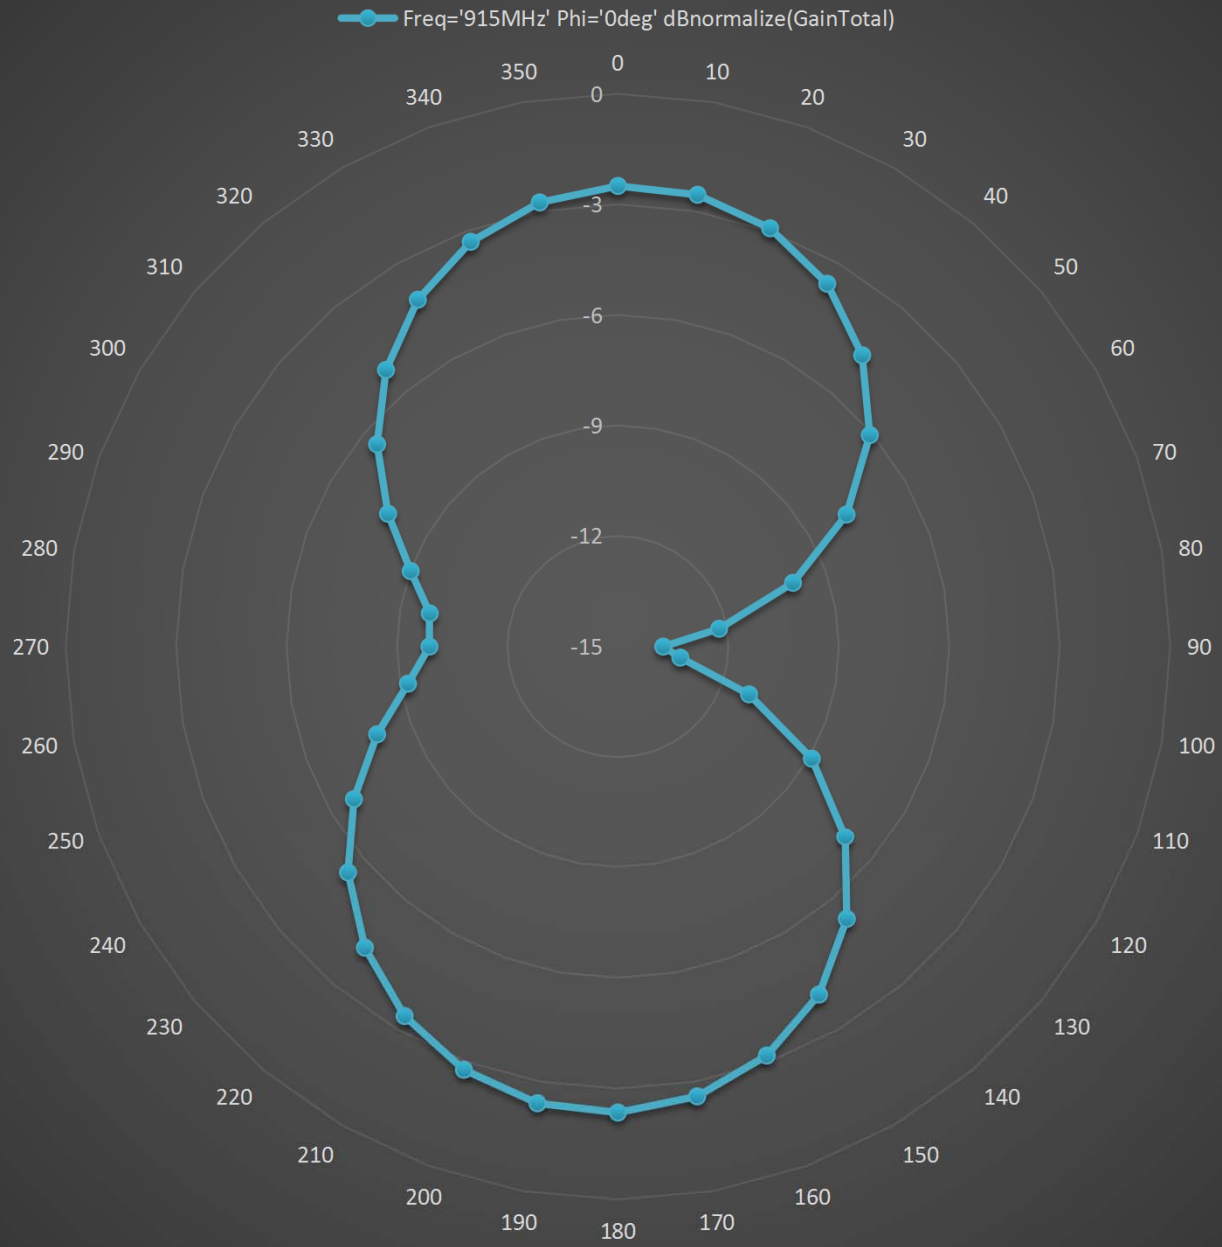

Freq='915MHz' Theta='90deg' dBnormalize(GainTotal)

