


1.Packing List

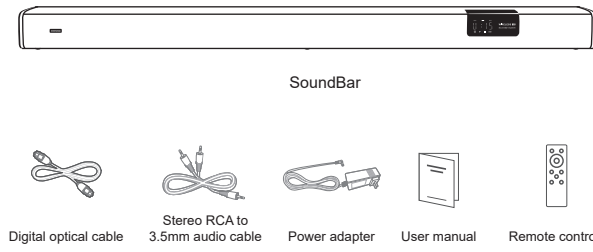


2. Parameter

Dimensions	(L)900*(D)98*(H)60mm
Speakers	Full-Range Driver: 45*66mm*4
Power	30W
Frequency	60Hz-18KHz
Separation	45dB
S/N Ratio	78dB
Interface	ARC, AUX, OPT, USB, SUB OUT
Input Voltage	AC 100V-240V 50/60Hz
Gross weight	3.3Kg


3. Function Description

1.Ports

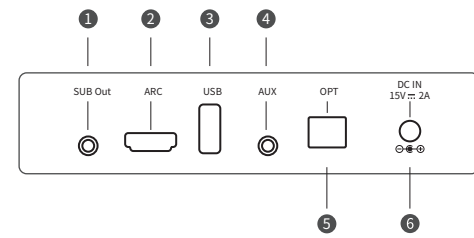


- Sub output: We reserve this upgrade interface, the users can connect it to your subwoofer and create a bass system.
- ARC: Using the HDMI cable, connect the ARC connector on the sound bar to the HDMI ARC connector on the TV.
- USB: Automatically identifies and plays tracks from a storage device.
- AUX: Connect to the RCA jack of the source device using a 3.5 to RCA cable.
- OPT: Connect to the OPT OUT jack of the source device using a optical cable.
- Power: Connect to 100~240V power supply.

2. Display Screen

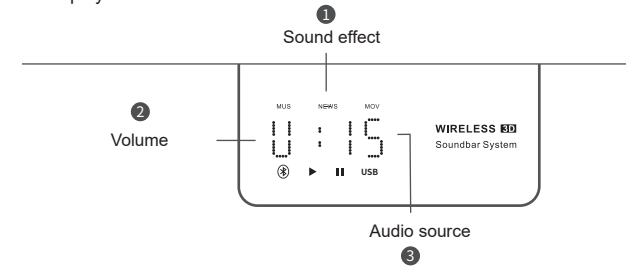


- Sound effect: You can select from 3 sound modes, the icon will light up once enter the corresponding mode.
MUS: music mode
NEWS: news mode
MOV: movie mode
- Volume: The volume level can be set between 1 and 30, 18~20 is advisable.
Shows audio input temporarily: Select the audio source through touch screen or remote control, the screen will show audio input for 3s, and then back to volume.
- Audio input: Select the audio source to input through touch screen or remote control, the corresponding icon will light up once this audio source enter successful.
ARC: ARC input (your device must support HDMI ARC output)
BT: Bluetooth input
AUX: Stereo aux input
OPT: Digital optical input
USB: USB input, the playback time will display on volume area

3.Operation (Touch Screen)

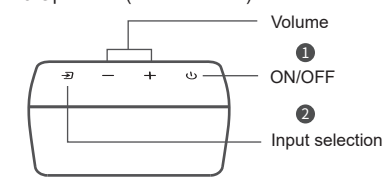


- ON/OFF: Touch the icon for 3s to turn on/off.
- Input selection: Touch the button and the "BT/AUX/OPT/ARC/USB" icons will light up if the corresponding audio source is connected.

4.Remote Control

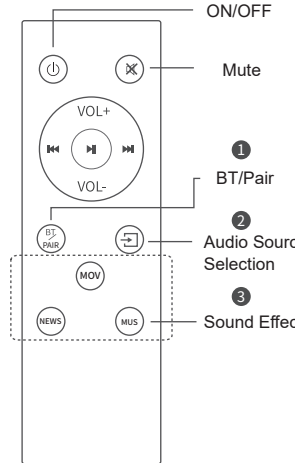


- BT/Pair: Short press this button to select BT mode, long press to remove the previously paired device and enter pairing mode.
- Audio Source Selection: Press the button, the icon (BT, AUX, OPT, ARC, USB) will light up if the corresponding audio source is connected.
- Sound Effect: MUS: music mode
NEWS: news mode
MOV: movie mode

4. Wall Mount

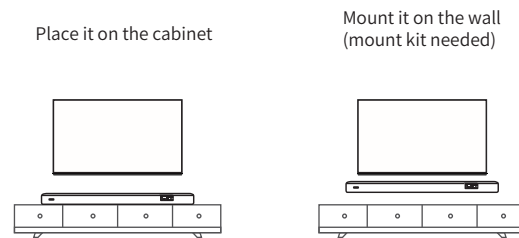

Installation Steps

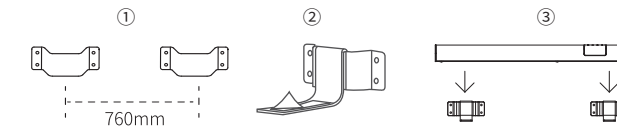

Important:
According to research, most customers prefer to place speakers on cabinet in order to keep the wall clean. The height of this speaker is only 60mm, which is very suitable for placing in front of the TV, so there is no mount kit in the package. Please contact us if you need mount kits.

5. Wired Connection

Plug into the power supply, the display screen will show "-" which means the soundbar is standby mode (do not turn on until audio connection completed).
There are four ways to connect the soundbar and the audio source: AUX, OPT, USB, ARC. Select one according to the device you are trying to connect, the corresponding icon will light up once this audio source enter successful.

Notes:

- The default audio output mode of most TVs is self-contained speaker, so after connect this soundbar with your TV by OPT, ARC, please set the TV audio output mode manually according to the audio cable connect with the soundbar.
- If you choose ARC connection, please make sure your TV or devices support the HDMI ARC feature.
TV's HDMI ARC is disabled by default, so please set TV for ARC mode. HDMI ARC port and mode on TV may be differently, please check the TV user manual for details.
If your TV doesn't support HDMI ARC, you can use the included optical audio cable to connect to the optical port on your TV.
- The HDMI cable is not included in the package. If you choose ARC connection, you need to buy an HDMI cable yourself.

6.Wireless Connection

- Turn on the device, touch the icon on the control panel or press the button on the remote control, the "BT" icon will flash slowly on the screen indicating the soundbar has entered pairing mode.
- Search for "Coccaa Live-1" on your bluetooth device and then pair to the soundbar. The BT icon will illuminate, and the soundbar will make an audible beep to indicate the connection is complete.

Notes:

- If your device asks for a password during the pairing process, please use "0000"
- If you can't find or pair to this bluetooth, turn off the soundbar, then 5s later turn it on and try to connect by following the instructions above.
- The soundbar can only pair to one device at a time, if you can't pair your device, please check that no other device is already paired with the soundbar. A previously paired device will automatically reconnect.
- Bluetooth connection range is 5-8m, but it will be shorter by some causes-radio interference such as WIFI routers, induction cookers and smart air cleaners; too much bluetooth your device paired and reserved.

7. Automatic Standby

To save power and extend the working time of the speaker, it will automatically switch to Standby mode if there is no input signal for over 15 minutes., and will turn back on when an input signal is detected.

8.After-sales Services and Warranty

- 30-Day Return of Any Reason. You may return your undamaged product and packaging within 30 days, please return the unit in its original carton.
- 12-Month Warranty for Quality-Related Issues. If it is not quality related, the customer must pay the return shipping costs and repair costs.
- When after-sales service is needed, please fill in the relevant information according to this form.
- If you have any questions or comments, please contact us at support@coccaa.com. We will reply to you within 12 hours.

Name		Email	
Address			
Date of Purchase		Order ID	
Fault description			

9.The Toxic and Hazardous Substances or Elements

Part Name	Toxic or harmful substances or elements					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent Chromium (Cr(VI))	Polybrominated biphenyls (PBB)	Polybrominated Diphenyl Ether (PBDE)
PCB part	X	O	O	O	O	O
Plastic part	O	O	O	O	O	O
Metal part	X	O	O	O	O	O
Speaker	O	O	O	O	O	O
Power adapter	X	O	O	O	O	O

This form was prepared in accordance with the provisions of SJ/T 11364.

O:Indicates that the content of the hazardous substance in all homogeneous materials of the part is below the limit requirement specified in accordance with the GB/T 26572.

X:Indicates that the content of the hazardous substance in all homogeneous materials of the part is exceeding the limit requirement specified in accordance with the GB/T 26572. There is no mature alternative solution that meets the requirements of RoHS.

10 The numbers in this mark indicate that the environmental protection use period of the product under normal use is 10 years. Some components may also have an environmental protection use period indication, and the environmental protection use period is subject to the figures in the indication. Due to different product models, the product may not include all the above parts except the host, please refer to the product packaging.

10000 Only suitable for areas below altitude of 2 000 m.

RoHS Only for use in non-tropical climates.



10.FCC Caution

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.


*RF warning for Mobile device:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

COOCAA

User Manual

coccaa Live-1



The speaker reaches full acoustic performance after it has played music for about 7 days at 2/3 volume

产品型号	酷开 Live-1-7说明书
产品料号	C070303059
印刷信息	单黑\128g铜版纸\过亚油\风琴折页