# FCC TEST REPORT FCC ID:2AXCX-VERTS0722

Report Number.       BTF230721R01301-3         Date of Test.       Jul. 11, 2023- Aug. 01, 2023         Date of issue       : Aug. 01, 2023         Total number of pages       33         Test Result       : PASS         Testing Laboratory.       : BTF Testing Lab (Shenzhen) Co., Ltd.         Address       : Tantou Community, Songang Street, Bao'an District, Shenzhen, China         Applicant's name       : Shenzhen Foxwell Technology Co., Ltd         Address       : Shenzhen 518106 - China         Manufacturer's name       : Shenzhen 518106 - China         Test specification:       : Stenzhen 518106 - China         Standard.       : FCC CFR Title 47 Part 15 Subpart C Section 15.231         Andress       : /         Non-standard test method       : N/A         Test Report Form No.       : TRF-EL-111_V0         Test Report Form(s) Originator       : BTF Testing         Master TRF       : Dated: 2022-02-21         This device described above has been tested by BTF, and the test results show that the equipment under test (EUT		
Date of issue       : Aug. 01, 2023         Total number of pages       33         Test Result       : PASS         Testing Laboratory       : BTF Testing Lab (Shenzhen) Co., Ltd.         Address       : F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, .         Address       : Shenzhen Foxwell Technology Co., Ltd         Applicant's name       : Shenzhen Foxwell Technology Co., Ltd         Address	Report Number	BTF230721R01301-3
Total number of pages       33         Test Result       : PASS         Testing Laboratory       : BTF Testing Lab (Shenzhen) Co., Ltd.         Address       : Tantou Community, Songgang Street, Bao'an District, Shenzhen, China         Applicant's name       : Shenzhen Foxwell Technology Co., Ltd         Address       : Shenzhen Foxwell Technology Co., Ltd <t< td=""><td>Date of Test</td><td>Jul. 11, 2023- Aug. 01, 2023</td></t<>	Date of Test	Jul. 11, 2023- Aug. 01, 2023
Test Result       : PASS         Testing Laboratory.       : BTF Testing Lab (Shenzhen) Co., Ltd.         Address       : F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China         Applicant's name       : Shenzhen Foxwell Technology Co., Ltd         Address       : Shenzhen 518106 · China         Test specification:       : Stendard.         Standard       : FCC CFR Title 47 Part 15 Subpart C Section 15.231         AnSI C63.10:2013       : ANSI C63.10:2013         Test procedure       : /         Non-standard test method       : N/A         Test Report Form No.       : TRF-EL-111_V0         Test Report Form(s) Originator       : BTF Testing	Date of issue	Aug. 01, 2023
Testing Laboratory	Total number of pages	33
Address       F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China         Applicant's name       Shenzhen Foxwell Technology Co., Ltd         Address       5/F, Plant C, Baocheng 71st Zone, Xin'an Street, Baoan District, Shenzhen 518106 · China         Manufacturer's name       Shenzhen Foxwell Technology Co., Ltd         Address       5/F, Plant C, Baocheng 71st Zone, Xin'an Street, Baoan District, Shenzhen 518106 · China         Manufacturer's name       Shenzhen Foxwell Technology Co., Ltd         Address       5/F, Plant C, Baocheng 71st Zone, Xin'an Street, Baoan District, Shenzhen 518106 · China         Test specification:       FCC CFR Title 47 Part 15 Subpart C Section 15.231 ANSI C63.10:2013         Test procedure       /         Non-standard test method       N/A         Test Report Form No.       : TRF-EL-111_V0         Test Report Form(s) Originator       : BTF Testing         Master TRF       : Dated: 2022-02-21         This device described above has been tested by BTF, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.         This device described above has been tested by BTF, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report. <tr< td=""><td>Test Result</td><td>PASS</td></tr<>	Test Result	PASS
Address       : Tantou Community, Songgang Street, Bao'an District, Shenzhen, China         Applicant's name       : Shenzhen Foxwell Technology Co., Ltd         Address       : Shenzhen Foxwell Technology Co., Ltd         Address       : Shenzhen Foxwell Technology Co., Ltd         Manufacturer's name       : Shenzhen Foxwell Technology Co., Ltd         Address       : Shenzhen 518106 · China         Test specification:       : FCC CFR Title 47 Part 15 Subpart C Section 15.231         Standard       : ANSI C63.10:2013         Test procedure       : /         Non-standard test method       : N/A         Test Report Form No.       : TRF-EL-111_V0         Test Report Form(s) Originator       : BTF Testing         Master TRF	Testing Laboratory	BTF Testing Lab (Shenzhen) Co., Ltd.
Address       5/F, Plant C, Baocheng 71st Zone, Xin'an Street, Baoan District,Shenzhen 518106 · China         Manufacturer's name       : Shenzhen Foxwell Technology Co., Ltd         Address       : 5/F, Plant C, Baocheng 71st Zone, Xin'an Street, Baoan District,Shenzhen 518106 · China         Test specification:       : FCC CFR Title 47 Part 15 Subpart C Section 15.231 ANSI C63.10:2013         Test procedure       : /         Non-standard test method       : N/A         Test Report Form No.       : TRF-EL-111_V0         Test Report Form(s) Originator       : BTF Testing         Master TRF       : Dated: 2022-02-21         This device described above has been tested by BTF, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.         This report shall not be reproduced except in full, without the written approval of BTF, this document may be altered or revised by BTF, personal only, and shall be noted in the revision of the document.         Product name       : Premium Diagnostic & TPMS Scanner         Trademark       : N/A	Address	Tantou Community, Songgang Street, Bao'an District, Shenzhen,
Manufacturer's name       : Shenzhen Foxwell Technology Co., Ltd         Address       :: Shenzhen Foxwell Technology Co., Ltd         Address       ::: Shenzhen 518106 · China         Test specification:       :: District.Shenzhen 518106 · China         Standard       ::: FCC CFR Title 47 Part 15 Subpart C Section 15.231         ANSI C63.10:2013       :: ANSI C63.10:2013         Test procedure       :: /         Non-standard test method       :: N/A         Test Report Form No.       :: TRF-EL-111_V0         Test Report Form(s) Originator       :: BTF Testing         Master TRF       :: Dated: 2022-02-21         This device described above has been tested by BTF, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.         This report shall not be reproduced except in full, without the written approval of BTF, this document may be altered or revised by BTF, personal only, and shall be noted in the revision of the document.         Product name       : Premium Diagnostic & TPMS Scanner         Trademark       : N/A	Applicant's name:	Shenzhen Foxwell Technology Co., Ltd
Address       5/F, Plant C, Baocheng 71st Zone, Xin'an Street, Baoan District, Shenzhen 518106 · China         Test specification:       FCC CFR Title 47 Part 15 Subpart C Section 15.231 ANSI C63.10:2013         Test procedure       :         Mon-standard test method       :         N/A       Test Report Form No.         Test Report Form(s) Originator       :         BTF Testing         Master TRF       :         Dated: 2022-02-21         This device described above has been tested by BTF, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.         This report shall not be reproduced except in full, without the written approval of BTF, this document may be altered or revised by BTF, personal only, and shall be noted in the revision of the document.         Product name       : Premium Diagnostic & TPMS Scanner         Trademark       : N/A	Address	5/F, Plant C, Baocheng 71st Zone, Xin'an Street, Baoan District,Shenzhen 518106 · China
Test specification:         Standard         Standard         FCC CFR Title 47 Part 15 Subpart C Section 15.231         ANSI C63.10:2013         Test procedure	Manufacturer's name:	Shenzhen Foxwell Technology Co., Ltd
Test specification:       Standard	Address	5/F, Plant C, Baocheng 71st Zone, Xin'an Street, Baoan District Shenzhen 518106 · China
Test procedure	Test specification:	
Non-standard test method       : N/A         Test Report Form No.       : TRF-EL-111_V0         Test Report Form(s) Originator       : BTF Testing         Master TRF       : Dated: 2022-02-21         This device described above has been tested by BTF, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.         This report shall not be reproduced except in full, without the written approval of BTF, this document may be altered or revised by BTF, personal only, and shall be noted in the revision of the document.         Product name       : Premium Diagnostic & TPMS Scanner         Trademark       : N/A	Standard	FCC CFR Title 47 Part 15 Subpart C Section 15.231 ANSI C63.10:2013
Test Report Form No:: TRF-EL-111_V0         Test Report Form(s) Originator: BTF Testing         Master TRF:: Dated: 2022-02-21         This device described above has been tested by BTF, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.         This report shall not be reproduced except in full, without the written approval of BTF, this document may be altered or revised by BTF, personal only, and shall be noted in the revision of the document.         Product name:: Premium Diagnostic & TPMS Scanner         Trademark:: N/A	Test procedure	/
Test Report Form(s) Originator : BTF Testing         Master TRF	Non-standard test method	N/A
Master TRF:: Dated: 2022-02-21         This device described above has been tested by BTF, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.         This report shall not be reproduced except in full, without the written approval of BTF, this document may be altered or revised by BTF, personal only, and shall be noted in the revision of the document.         Product name:: Premium Diagnostic & TPMS Scanner         Trademark:: N/A	Test Report Form No	TRF-EL-111_V0
This device described above has been tested by BTF, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report. This report shall not be reproduced except in full, without the written approval of BTF, this document may be altered or revised by BTF, personal only, and shall be noted in the revision of the document. <b>Product name: Premium Diagnostic &amp; TPMS Scanner</b> Trademark: N/A	Test Report Form(s) Originator :	BTF Testing
test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report. This report shall not be reproduced except in full, without the written approval of BTF, this document may be altered or revised by BTF, personal only, and shall be noted in the revision of the document. <b>Product name:: Premium Diagnostic &amp; TPMS Scanner</b> Trademark:: N/A	Master TRF:	Dated: 2022-02-21
Product name:: Premium Diagnostic & TPMS Scanner Trademark: N/A	test (EUT) is in compliance with the F identified in the report. This report shall not be reproduced e	CC requirements. And it is applicable only to the tested sample xcept in full, without the written approval of BTF, this document may
Trademark: N/A		
		-
Model/Type reference: TS5000 TS7000	INIOUEI/ I YPE IEIEIEIIUE	
Ratings Input: DC 5V Battery: DC 3.7V	Ratings	

Testing procedure and testing location:	
Testing Laboratory:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
	Elma. Kang
Tested by (name + signature):	_elma.yang
	Elma. Kang
Reviewer (name + signature):	elma.yang
Approved (name + signature):	Ryan.CJ

# **Table of Contents**

# Page

1. VERSION
2. SUMMARY OF TEST RESULTS
2.1 TEST FACILITY
2.2 MEASUREMENT UNCERTAINTY
3. GENERAL INFORMATION
3.1 GENERAL DESCRIPTION OF EUT 8
3.2 DESCRIPTION OF TEST MODES
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS 10
4. EMC EMISSION TEST
4.1 CONDUCTED EMISSION MEASUREMENT
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS
4.1.2 TEST PROCEDURE
4.1.3 DEVIATION FROM TEST STANDARD
4.1.4 TEST SET OF
4.2 RADIATED EMISSION MEASUREMENT
4.2.1 RADIATED EMISSION LIMITS
4.2.2 TEST PROCEDURE 18
4.2.3 TEST SETUP
4.2.4 EUT OPERATING CONDITIONS
4.2.5 TEST RESULTS
5.2 TEST PROCEDURE
5.3 DEVIATION FROM STANDARD
5.4 TEST SETUP
5.5 EUT OPERATION CONDITIONS
5.6 TEST RESULTS
6. CALCULATION OF AVERAGE FACTOR27
7. DWELL TIME
7.1 APPLICABLE STANDARD
7.2 TEST PROCEDURE
7.5 EUT OPERATION CONDITIONS
7.6 TEST RESULTS
8. ANTENNA REQUIREMENT

# Project No.: BTF230721R01301-3 Page 4 of 33

Table of Contents	Page

9. TEST SETUP PHOTO	33
10. EUT CONSTRUCTIONAL DETAILS	33

# 1. VERSION

Report No.	Version	Description	Approved
BTF230721R01301-3	Rev.01	Initial issue of report	Aug. 01, 2023

# 2. SUMMARY OF TEST RESULTS

FCC Part15 (15.231) , Subpart C				
Standard Section	Test Item	Judgment	Remark	
15.207	Conducted Emission	PASS		
15.209,15.231b	Fundamental &Radiated Spurious Emission Measurement	PASS		
15.231c	Occupy Bandwidth	PASS		
15.231a	Dwell time	PASS		
15.203	Antenna Requirement	PASS		

Test procedures according to the technical standards:

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

# 2.1 TEST FACILITY

BTF Testing Lab (Shenzhen) Co., Ltd. Add. : F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

FCC Registration Number: 518915 Designation Number: CN1330 Company Number: 27844 CAB Identifier: CN0135

#### 2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y  $\pm$  U  $\cdot$  where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2  $\cdot$  providing a level of confidence of approximately 95 %  $\circ$ 

No.	Item	Uncertainty	
1	3m camber Radiated spurious emission(9KHz-30MHz)	U=4.5dB	
2	3m camber Radiated spurious emission(30MHz-1GHz)	U=4.8dB	
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB	
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB	
5	Conducted disturbance	U=3.2dB	
6	RF Band Edge	U=1.68dB	
7	RF power conducted	U=1.86dB	
8	RF conducted Spurious Emission	U=2.2dB	
9	RF Occupied Bandwidth	U=1.8dB	
10	RF Power Spectral Density	U=1.75dB	
11	humidity uncertainty	U=5.3%	
12	Temperature uncertainty	U=0.59°C	

# **3. GENERAL INFORMATION**


# 3.1 GENERAL DESCRIPTION OF EUT

Equipment	Premium Diagnostic & TPMS Scanner	
Trade Name	N/A	
Model Name	TS5000	
Serial Model	TS7000	
Model Difference	All models have the same circuit and RF module, only the appearance color are different	
Hardware version	H1.0	
Software version	S1.0	
Operation Frequency:	433.92MHz	
Modulation Type:	ASK	
Antenna Type: Spring Antenna		
Antenna Gain:	0.8 dBi	
	Input: DC 5V	
Ratings	Battery: DC 3.7V	
Battery:	3.7V 5000mAh 18.5Wh	
SWITCHING POWER	OWER Model:PSY0502000	
SUPPLY INPUT:AC 100-240V 50/60Hz 0.6A Max OUTPUT:DC 5V 2.0A		

## 3.2 DESCRIPTION OF TEST MODES

For All Emission			
Final Test Mode Description			
Transmitting mode Keep the EUT in continuously transmitting mode			
Charging mode Keep the EUT in Charging mode.			
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.			

#### 3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED Conducted Emission



#### **RE Spurious Emissions**



#### 3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Premium Diagnostic & TPMS Scanner	N/A	TS5000	N/A	EUT
A-1	Adapter	N/A	PSY0502000	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <sup>r</sup>Length <sup>a</sup> column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

# 3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conducted Emission at AC power line					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Pulse Limiter	SCHWARZBECK	VTSD 9561-F	00953	2022-11-24	2023-11-23
Coaxial Switcher	SCHWARZBECK	CX210	CX210	2022-11-24	2023-11-23
V-LISN	SCHWARZBECK	NSLK 8127	01073	2022-11-24	2023-11-23
LISN	AFJ	LS16/110VAC	16010020076	2023-02-23	2024-02-22
EMI Receiver	ROHDE&SCHWA RZ	ESCI3	101422	2022-11-24	2023-11-23

Occupied Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RF Test software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMNUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Emissions in restricted frequency bands (below 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2023-03-24	2024-03-23
Preamplifier	SCHWARZBECK	BBV9744	00246	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1 0m	21101566	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1 m	21101568	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2021-11-28	2023-11-27
EMI TEST RECEIVER	ROHDE&SCHWA RZ	ESCI7	101032	2022-11-24	2023-11-23
SIGNAL ANALYZER	ROHDE&SCHWA RZ	FSQ40	100010	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamplilifier	SCHWARZBECK	BBV9718D	00008	2023-03-24	2024-03-23
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ_EMC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021-11-28	2023-11-27

Emissions in restricted frequency bands (above 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2023-03-24	2024-03-23
Preamplifier	SCHWARZBECK	BBV9744	00246	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1 0m	21101566	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1 m	21101568	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2021-11-28	2023-11-27
EMI TEST RECEIVER	ROHDE&SCHWA RZ	ESCI7	101032	2022-11-24	2023-11-23
SIGNAL ANALYZER	ROHDE&SCHWA RZ	FSQ40	100010	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamplilifier	SCHWARZBECK	BBV9718D	00008	2023-03-24	2024-03-23
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ_EMC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021-11-28	2023-11-27

#### 4. EMC EMISSION TEST

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

#### 4.1 CONDUCTED EMISSION MEASUREMENT

# 4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

	Limit (	Standard	
FREQU NCY (MHz)	Quasi-peak	Average	Stanuaru
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) The tighter limit applies at the band edges.

(2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

## The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.
- 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

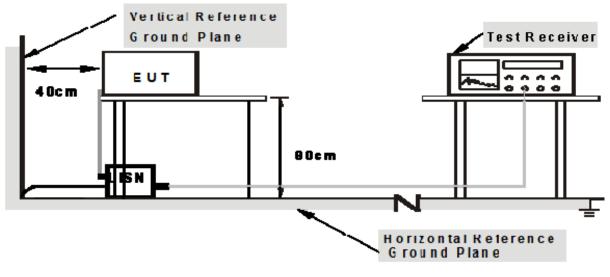


# Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

#### 4.1.6 Test Result

Temperature :	<b>26</b> ℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

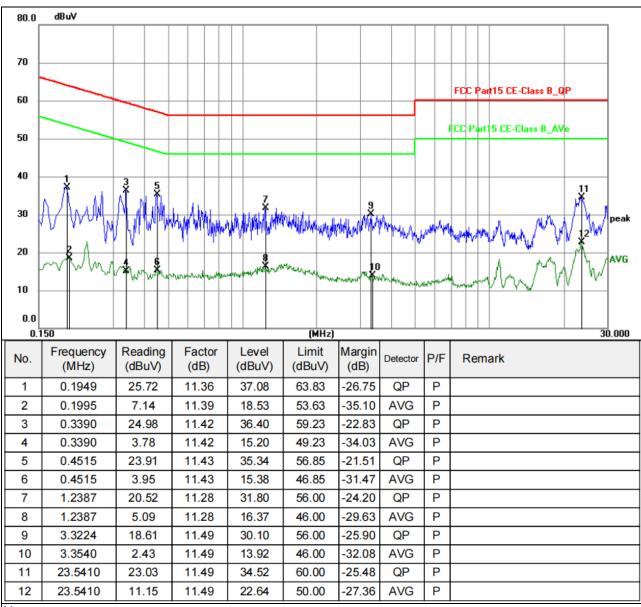


Notes:

1.An initial pre-scan was performed on the line and neutral lines with peak detector.

2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.3.Mesurement Level = Reading level + Correct Factor

#### Project No.: BTF230721R01301-3 Page 16 of 33

Temperature :	<b>26</b> ℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	Ν
Test Voltage :	AC 120V/60Hz		

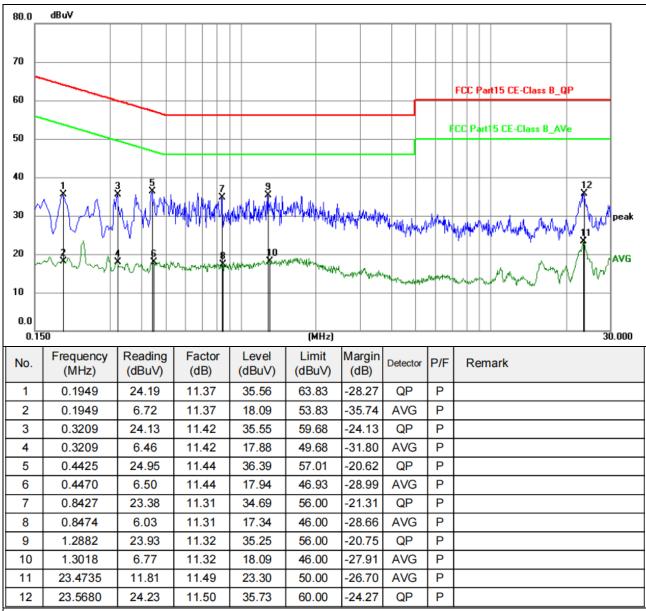

Notes:

1.An initial pre-scan was performed on the line and neutral lines with peak detector.

2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.3.Mesurement Level = Reading level + Correct Factor

4.2 RADIATED EMISSION MEAS Test Requirement:	FCC Part15 C Section 15.209				
· ·		1011 10:200			
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

# 4.2 DADIATED EMISSION MEASUBEMENT

#### **4.2.1 RADIATED EMISSION LIMITS**

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.231(b) limit in the table below has to be followed.

Frequencies(MHz)	Field Strength(micorvolts/meter)	Measurement Distance(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)		
	PEAK	AVERAGE	
Above 1000	74	54	

Notes:

(1) The limit for radiated test was performed according to FCC PART 15C.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

#### FUNDAMENTAL AND HARMONICS EMISSION LIMITS

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	2.250	225
70 - 130	1,250	125
130 - 174	1,250 to 3,750 **	125 to 375 **
174 - 260	3,750	375
260 - 470	3,750 to 12,500 **	375 to 1,250 **
Above 470	12,500	1,250

\*\* linear interpolations

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz,  $\mu$ V/m at 3 meters = 56.81818(F) - 6136.3636; for the band 260-470 MHz,  $\mu$ V/m at 3 meters = 41.6667(F) - 7083.3333. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

#### FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)	
Below 1.705	30	
1.705 – 108	1000	
108 – 500	2000	
500 – 1000	5000	
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower	

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW setting	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

## 4.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item -EUT Test Photos.


Note:

Both horizontal and vertical antenna polarities were tested


and performed pretest to three orthogonal axis. The worst case was X axis and the emissions were reported

#### 4.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

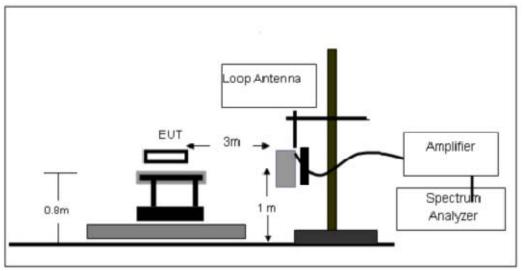

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

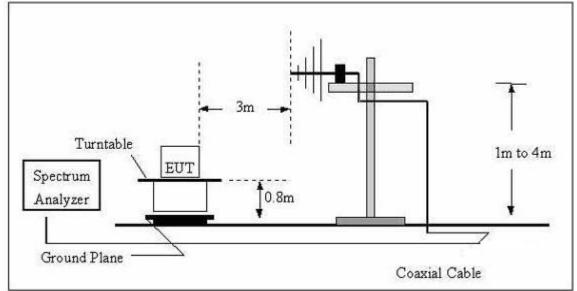

#### (C) Radiated Emission Test-Up Frequency Above 1GHz

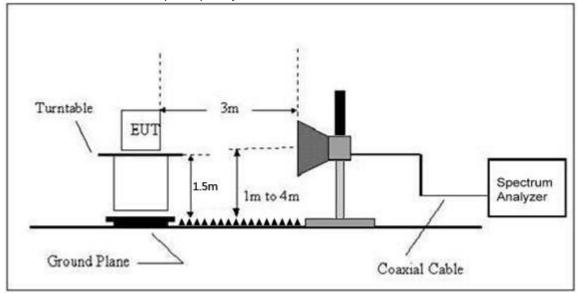

#### 4.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 4.2.5 TEST RESULTS

#### Radiated Spurious Emission (Below 9KHz - 30MHz )

Temperature :	<b>26</b> ℃	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	
Test Voltage :	DC 3.7V		
Test Mode :	TX Mode		

Freq.	Reading	Limit Margin		State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
				PASS
				PASS

## NOTE:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =40 log (specific distance/test distance)(dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

#### Radiated Spurious Emission (Between 30MHz - 1GHz)

Temperature :	<b>26</b> ℃	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Horizontal
Test Voltage :	DC 3.7V		
Test Mode :	TX Mode		

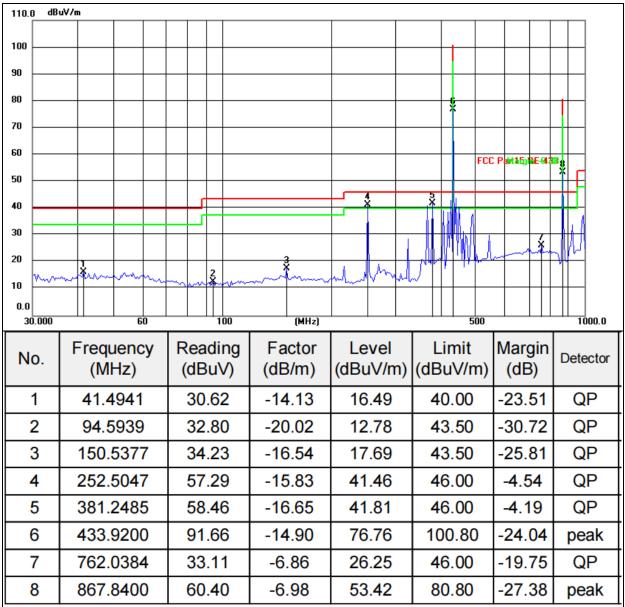


Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor

2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Temperature :	<b>26</b> ℃	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Vertical
Test Voltage :	DC 3.7V		
Test Mode :	TX Mode		

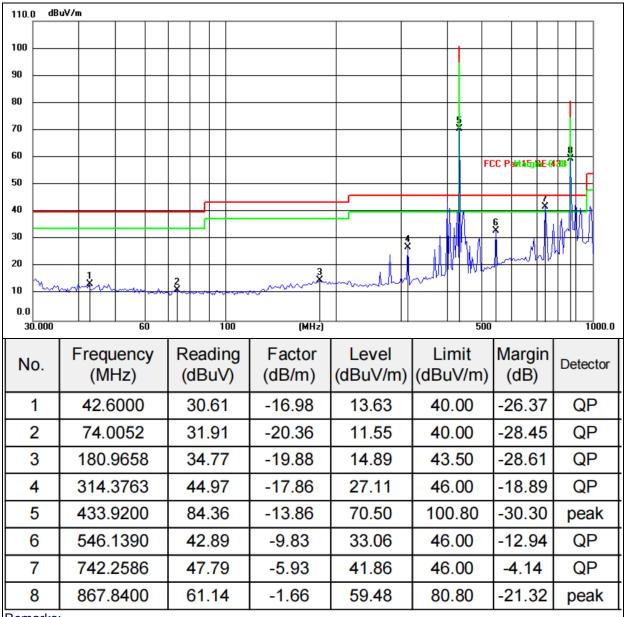

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor

2. The emission levels of other frequencies are very lower than the limit and not show in test report.

For average Emission

Frequency	Peak	Duty	Average			
Frequency MHz	Level	cycle	Level	Limit	Margin	Polarization
IVITIZ	dBuV/m	factor	dBuV/m	AV		
433.92	76.76	-14.07	62.69	80.8	-18.11	Horizontal
867.84	53.42	-14.07	39.35	60.8	-21.45	Horizontal

Notes: 1. Average emission Level = Peak Level + Duty cycle factor

2.Duty cycle level please see clause 5.

Frequency MHz	Peak Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit AV	Margin	Polarization
433.92	70.50	-14.07	56.43	80.8	-24.37	Vertical
867.84	59.48	-14.07	45.41	60.8	-15.39	Vertical

Notes: 1. Average emission Level = Peak Level + Duty cycle factor

2. Duty cycle level please see clause 6.

Frequency	Peak	Duty	Average	Lii	mit	Margi	n dB	
MHz	Level	cycle	Level					Polarization
IVITIZ	dBuV/m	factor	dBuV/m	PK	AV	PK	AV	
1305.86	43.58	-14.07	29.51	74	54	-44.49	-24.49	Vertical
1735.92	45.58	-14.07	31.51	80.8	60.8	-49.29	-29.29	Vertical
2606.23	46.25	-14.07	32.18	80.8	60.8	-48.62	-28.62	Vertical
3041.88	46.75	-14.07	32.68	74	54	-41.32	-21.32	Vertical
3472.27	51.92	-14.07	37.85	80.8	60.8	-42.95	-22.95	Vertical
3905.62	51.16	-14.07	37.09	74	54	-36.91	-16.91	Vertical
1303.65	48.92	-14.07	34.85	74	54	-39.15	-19.15	Horizontal
1740.29	48.59	-14.07	34.52	80.8	60.8	-46.28	-26.28	Horizontal
2606.36	47.77	-14.07	33.70	80.8	60.8	-47.10	-27.10	Horizontal
3038.17	48.59	-14.07	34.52	74	54	-39.48	-19.48	Horizontal
3476.49	46.89	-14.07	32.82	80.8	60.8	-47.98	-27.98	Horizontal
3910.15	47.56	-14.07	33.49	74	54	-40.51	-20.51	Horizontal

# Radiated Spurious Emission (1GHz to 10<sup>th</sup> harmonics)

Notes: 1.Average emission Level = Peak Level + Duty cycle factor

2.Duty cycle level please see clause 6.

#### **5. BANDWIDTH TEST**

#### 5.1 APPLIED PROCEDURES / LIMIT

According to FCC 15.231(c) requirement:

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating between 70 MHz to 900 MHz. Those devices operating above 900 MHz, the emission spurious shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

B.W (20dBc) Limit = 0.25% \* f(MHz) = 0.25% \* 433.92MHz = 1.0848MHz

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5*OBW ~ 5*OBW
RB	1%-5%OBW
VB	3 RBW,
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 5.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 2\*OBW~5\*OBW, VBW≥3 RBW, Sweep time = Auto.

#### 5.3 DEVIATION FROM STANDARD

No deviation.

#### 5.4 TEST SETUP

EUT	SPECTRUM
	ANALYZER


#### 5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

# 5.6 TEST RESULTS

Temperature :	<b>26</b> ℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.7V
Test Mode :	TX Mode		

Frequency	20dB Bandwidth	Limit	Result
Frequency	(kHz)	(MHz)	Result
433.92MHz	84.32	0.25%*433.92=1.0848	PASS

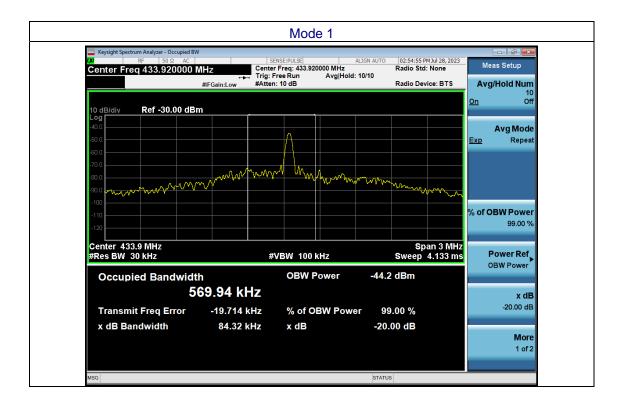

#### 6. CALCULATION OF AVERAGE FACTOR

The output field strengths of specification in accordance with the FCC rules specify measurements with an average detector. During the test, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.

The duty cycle is measured in 100 ms or the repetition cycle period, whichever is a shorter time frame. The duty cycle is measured by placing the spectrum analyzer to set zero span at 1MHz resolution bandwidth.

Averaging factor in dB =20log (duty cycle)

The duration of one cycle =51.20ms

The duty cycle is simply the on-time divided the duration of one cycle

Duty Cycle = (1.6ms\*10+0.392ms\*15)/ 51.20ms

=10.12ms / 51.20ms

=0.198ms

Therefore, the averaging factor is found by 20log0.198 = -14.07dB

Test plot as follows:

Note: During the 100ms, the amount of pulse and on-time of pulse are the same for every pulse train.




Cycle


Pulse



#### **On-time-1**

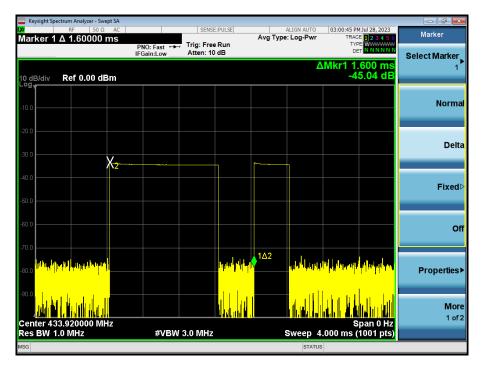

**On-time-2** 

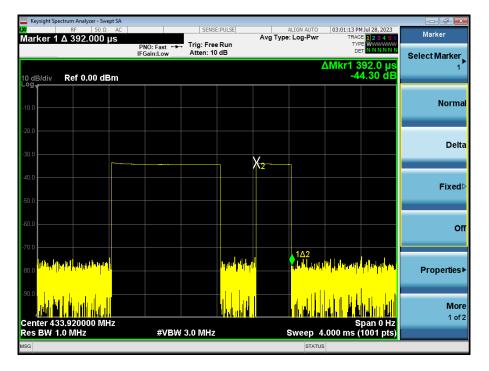

#### 7. DWELL TIME

#### 7.1 APPLICABLE STANDARD

According to FCC 15.231(a) requirement:

A manually operated transmitter shall employ a switch that will automatically deactivate the

transmitter within not more than 5 seconds of being released.

#### 7.2 TEST PROCEDURE

Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

1.Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.

2.Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.

3.Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

4.Repeat above procedures until all measured frequencies were complete.

#### 7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

EUT	SPECTRUM
	ANALYZER

#### 7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

# 7.6 TEST RESULTS

Dwell time (millisecond)	Limit (second)	Result
490.0ms	<5s	Pass

#### Test plot as follows:

					ectrum Analyzer - Swept SA	🚾 Keysight Sp
Marker	03:02:17 PM Jul 28, 2023	ALIGN AUTO Avg Type: Log-Pwr	SENSE:PULSE		RF 50 Ω AC Δ 490.000 ms	<mark>X/</mark> Markor 1
Select Marker	TRACE 123456 TYPE DET NNNNN	• // •	Trig: Free Run Atten: 10 dB	PNO: Wide ↔ IFGain:Low	Δ 490.000 ms	Marker
1	Mkr1 490.0 ms -0.07 dB	Δ			Ref 0.00 dBm	10 dB/div Log <sub>w</sub>
Norma						-10.0
						-20.0
Delt						-30.0
						-40.0
Fixed						-40.0
						-60.0
O						-70.0
Dranatiaa			142			
Properties	terre film in statistical and	alah du daha Ukhishawash		le elle vetre biture 🗙	n en de la set de la seconda de la seconda	
Mor						-90.0
1 of	Span 0 Hz 7.000 s (1001 pts)	Sweep	00 kHz	#VBW 3	3.920000 MHz 00 kHz	Center 43 Res BW 1
		STATUS				ISG

# 8. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203		
15.203 requirement:			
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible			
party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a			
unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can			
be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.			
EUT Antenna:			
The antenna is Spring Antenna, the best case gain of the antennas are 0.8 dBi, reference to the appendix II for			
details			

# 9. TEST SETUP PHOTO

Reference to the appendix I for details.

#### **10. EUT CONSTRUCTIONAL DETAILS**

Reference to the appendix II for details.

**\*\*\*\*\*\* END OF REPORT \*\*\*\*\***