

OSW-11说明书

材质：128g铜板 形式：折页 尺寸：85x55mm（成品）

封底

封面

For more information, please visit:

www.oraimo.com

@oraimo accessories

@oraimoclub

@oraimomate

Receiving Call, Text, & Reminders

To enable notifications on your watch:
1. Verify that BT is enabled on your mobile device.
2. Open the Joywear 2 App on your mobile device and tap the "Device" at the bottom of the mobile dashboard.
3. Enable Phone/SMS/App/Alarm/Sedentary Reminder notifications.

Phone Notification
When you receive a phone call, your watch vibrates and the incoming number or name (if the contact is in your address book) scrolls across the display. Once turned on the reject function in App, you can long press to reject phone call.

Message Notification
When you receive a message, your watch vibrates. Tap to check message.
Setting Silent Alarms
You can add, edit, and delete silent alarms from the Joywear 2 App.

Notification When Sitting Too Long
Watch vibrates when you sitting too long. The default reminder time is 60 minutes. You can change reminder time or close reminder from the Joywear 2 App.

Sleep Tracking

Automatically recognize your status and monitor the whole sleep progress with analyzing deep sleep, light sleep and awake times.
Sleep data could be only checked from the Joywear 2 App.

Troubleshooting

Can't connect with BT:
1. Make sure your device supports BT 4.2. Make sure your device's software is above iOS 8.0 or Android 4.4.
2. Restart BT and reconnect after 20 seconds.
3. Restart mobile phone.
4. Make sure mobile phone is not connected with other device.
5. Make sure Joywear 2 is running in system.

Can't search the product.
1. Make sure your location services are enabled (GPS is working), the product has enough power, the product does not connect with other phone and under activated state, then keep the product close to your phone.
If still can not search it please turn off BT function and reconnect after 20 seconds.
Can't monitor heart rate.
Make sure you wear tightly enough to monitor heart rate.

Can't receive notifications after enabling it.
Android phone: Make sure the product is connected with your phone. Allow Joywear 2 App to access notifications. If any security App installed, add Joywear 2 to trust list.
iPhone: Make sure the product is connected with your phone. Reboot your phone and reconnect it with the product.

Is the product waterproof?
This product supports IP67 waterproof which allows the product to be held in water for a maximum of 30 minutes at a depth of 1 meter. You can wear it while washing your hands, having a cold shower or washing your car. Please do not wear it while diving or scuba diving.

Do I need to connect BT all the time? Are there data left when product disconnected with mobile via BT?

Data will be kept in product for seven days. When product is connected with mobile, data will be uploaded to mobile automatically. Kindly synchronize product data to mobile in time.
Note: Call and message notifications only work under BT connection status.

FCC Caution: This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-Reorient or relocate the receiving antenna.
-Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-Consult the dealer or an experienced radio/TV technician for help.
The device has been evaluated to meet general RF exposure requirement.
The device can be used in portable exposure condition without restriction.

CUSTOMER SERVICE

365 DAYS WARRANTY

Email: hello.ab@oraimo.com



Caution:

- 1. Risk of explosion if battery is replaced by an incorrect type, dispose of used batteries according to the instructions.
- 2. The product shall only be connected to a USB interface of version USB2.0.
- 3. Adapter shall be installed near the equipment and shall be easily accessible.
- 4. EUF Temperature: -10°C ~ +55°C

Operating Frequency (RF): 2402-2480MHz Modulation mode: GFSK BT output power: Bluetooth 0-10dBm

EU Declaration of Conformity

In accordance with Annex VI of Directive 2014/53/EU of the European Parliament and of the Council
1. For the following Radio equipment:
Model: OSW-11
Product: Smart Watch
Trade name or Brand: oraimo
Software / Hardware number: RH170-V02/ RH170B/V000471

2. Name and address of the manufacturer or his authorised representative:
Manufacturer: ORAIMO TECHNOLOGY LIMITED
Add: ROOM 604 6/F SOUTH TOWER WORLD FINANCE CTR HARBOUR CITY 17 CANTON ROAD TST KL

3. This declaration of conformity is issued under the sole responsibility of the Manufacturer.

4. Object of the declaration (identification of the radio equipment allowing traceability; it may include a colour image of sufficient clarity where necessary for the identification of the radio equipment):

5. The object of the declaration described above is in conformity with the relevant Union harmonization legislation:
Directive 2014/53/EU (RED)

6. References to the relevant harmonised standards used or references to the other technical specifications in relation to which conformity is declared:

Article 3.1a Health: EN 62479: 2010
Article 3.1a Electrical Safety: EN 62368-1:2014+A11:2017
Article 3.1b: TS1 EN 301 489-1 V2.2.3 (2019-11)
Draft ETSI EN 301 489-17 V3.2.0 (2017-03)

Article 3.2: ETSI EN 300 328 V2.1.1 (2016-11)
7. Notified Body Name: MET Laboratories, Inc.
Notified Body Number: 0980

Notified Body Assessment Performed: Module B/C on Article 3.1a, 3.1b, 3.2 and 3.3
Technical File Identification Number: N/A

8. Where applicable, description of accessories and components, including software, which allow the radio equipment to operate as intended and covered by the EU declaration of conformity:

User instructions are provided in the User Manual. The Software and Hardware versions are specified above.

9. Additional information:
Referring to Article 10.2 of the Directive, this equipment is so constructed that it can be operated in all Member States, without infringing applicable requirements on the use of radio spectrum.

Referring to Article 10.10 of the Directive, there are no restrictions on putting this equipment into service or of requirements for authorisation of use. Please refer to the User Manual for details.

On behalf of: Manufacturer: ORAIMO TECHNOLOGY LIMITED
Add: ROOM 604 6/F SOUTH TOWER WORLD FINANCE CTR HARBOUR CITY 17 CANTON ROAD TST KL (place and date of issue): Shenzhen, 2019-12-10

(name, function): Yiting Luo/ Manager (signature): Yiting Luo

WARRANTY CERTIFICATE

Name :	
Address :	
Tel. No. :	
Date of purchase : (dd/mm/yy)	
Store name :	
Warranty period :	

WARRANTY TERMS & CONDITIONS

* All quality-related defects on items sold directly by oraimo or oraimo's authorized resellers are covered by an extensive warranty, starting from the date of purchase.

* oraimo's limited warranty is restricted to the country of purchase. The limited warranty is void on items taken outside the country they were originally bought in or shipped to directly from an authorized online purchase.

* This warranty covers only original oraimo products. It is not applicable to normal wear and tear, or any defects arising from damage caused by misuse of this product.

* Warranty is for the primary product only nor transferable. Any free additional product(s) are not covered in this warranty.

* If the product fails regardless of usage in compliance with the instruction manual and other written precaution, replacement will be provided free of charge.

* To receive replacement, bring the warranty certificate and the product itself to the store from where you have purchased the product.

oraimo
smart accessories

WELCOME GUIDE

* For safety issue, the smart watch remains low capacity during shipping. Please fully charge the smart watch before initial use!


TEMPO
OSW-11



Smart Watch
Model: OSW-11
Hereby, ORAIMO TECHNOLOGY LIMITED.
Declares that this smart watch is in compliance with the essential requirements and other relevant provisions of directive 2014/53/EU.

Please read this Guide carefully before using the product

Product Overview



Basic Product Specifications

Display Screen :	1.3 inch IPS true colour
BT Version :	V4.2
Battery Capacity :	200mAh
Battery Type :	Lithium polymer battery
Standby Time :	Up to 20 days * Lab test result
Watch Size :	42*20*9.5mm
Strap Size :	245mm
Material :	ABS/PC/TPU
Waterproof :	IP67

Setting Up Your Smart Watch



For the best experience we recommend using the Joywear 2 App for iOS and Android.

Apple iOS 8.0 or above
Android 4.4 or above

Setting up the watch on your phone


To get started:

1. Find the Joywear 2 App in one of these locations, depending on your device:
The Apple App Store for iPhone.
The Google Play Store for Android phone.

2. Install the App. Note that if you don't have an account with the store you'll be required to create one before you can download the App.

3. When the App is installed, open it and be guided through a series of questions that help you create your account, or login to your existing account.

4. Continue following the onscreen instructions to connect, or pair the product to your phone or tablet.

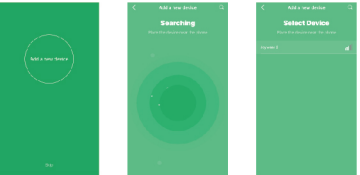

Your account asks for information such as height, weight, and gender to make various calculations such as stride lengths to estimate distance and basal metabolic rate to estimate calorie burn. You can modify your information in Joywear 2-Profile-Me.




When you're done pairing, read through the guide about this product and then explore the dashboard.

Getting To Know Your Smart Watch

Wrist Placement

For all-day wear, your watch should usually rest a finger's width below your wrist bone and lay flat, as you would normally wear a watch.




Charging Your Watch

1. Pull out the wristband.



2. Insert the device's charging plug into USB port.



Power On/Off

- When the watch is under shutdown mode, charge the watch or long press the touch screen or side button for 3 seconds to power on the wristband.
- When the watch is turned on, tap to switch the screen to the power-off interface, long press the touch screen for 3 seconds, the watch vibrates and shuts down.

Waking A Dimmed Screen

When you're not using this product, the display is off. To wake it up:
• Press the side button.
• Turn your wrist towards you. This behavior, known as Light Up, can be turned off in your smart watch settings in Joywear 2.

Using The Clock Face And Menus

The home screen is a clock. On the clock face you can tap to see your steps taken, distance, calories burned, heart rate, training, message, and other functions. After viewing the clock face, you can cycle through the different menus to see information or use different functions on your smart watch. The following menus are available:


Clock

Long press the screen firstly, then slide and tap to change clock face.



Shortcut to other functions

Slide down to enter other functions directly.



Distance / Calories Burned

Shows your current distance.



Heart Rate

Automatically monitors and shows your real-time heart rate.



Steps

Shows your current steps taken.



Shortcut to message

Slide up to check the message directly.



Weather

Shows the current weather.




Message

Tap once to view message. Slide to check next message.



Training — Tap once to enter and slide through different training modes, jump, running, riding, ping pong, tennis and badminton. Then tap once to start training and slide right to choose to end.

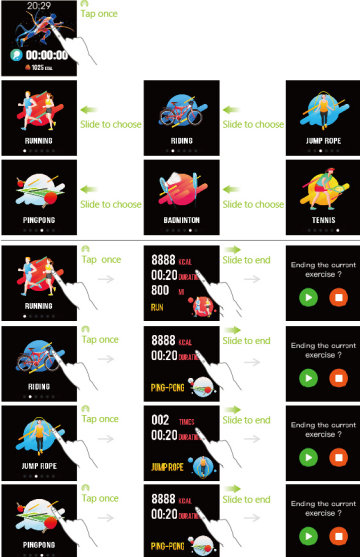


Others

Tap once to enter sub-menu.



Find Me

Under paired mode, tap once, your connected phone will ring.



Reset

Tap once to reset the watch and Joywear 2 App.



Brightness

Tap to adjust screen brightness.



About

Tap once to view the firmware version number and BT address of the watch.



Power off

Long press to turn off the watch.



Pantone 375C

注：绿色部分以此专色印刷！