

样品承认书

Confirmation of products

客户名称 Customer	Shenzhen Reolink Technology Co., Ltd.							
项目名称	CDO M	版本	A 0	日期	0000 11 04			
Project Name	SD8-N	Version	A. 2	Date	Pate 2023-11-24			
项目料号		客户料号	54. 07. 001. 0111A					
Project NO.	SD8-N	Customer			1.0111A			
		NO.						
频段	$2400^{\sim}2500\mathrm{MHz}$	备注	WIFI-2		_9			
Frequency Range	5100~5800MHz	Notes		WILI	1 2			
设计								
Designed By								
审核								
Approved By								
客户确认								
Clients' Approval								

公司名称:深圳市林荣科技有限公司

Designer: SHENZHEN LINRONG TECHNOLOGY CO., LTD

地址:深圳市龙华区大浪街道华荣路联建工业园 1 栋 3 楼

ADD: Floor 3, building 1, LianJian Industrial Park, Huarong Road, Dalang street, Longhua

District, Shenzhen



Index

1. Specifications·····	3
2. VSWR Testing·····	3
2-1 Testing connection·····	3
2-2 VSWR·····	••••••4
2-3 Testing data·····	•••••4
3.Power、Sensiticity Testing	4
3-1 Testing field·····	4
3-2 Testing results	5
3.3 Active testing	6
4. Environmental treatment	6
5. Mechanical Dimension Drawing······	7
6. Mechanical Dimension Testing report······	8
7、Packaging standard	9



1. Specification

This report mainly provides the testing conditions of various electric and structural performance parameters for cell phone antenna ----SD8-N Picture 1 shows the antenna designed by LR.



2、 VSWR Testing

2.1 Testing connection

The **Return Loss** testing devices are connected in sequence: Agilent5071C Network Analyzer →Testing Cable → Customer-providing Devices.


2.2 VSWR

The following table expresses the VSWR value of antenna's two edges of its frequency range. With regard to the relevant diagram of VSWR


SD8-N WIFI VSWR								
Frequency (MHz)	2400	2500	5100	5800				
VSWR	1.18	1.10	1.79	1.24				

2.3 Testing data



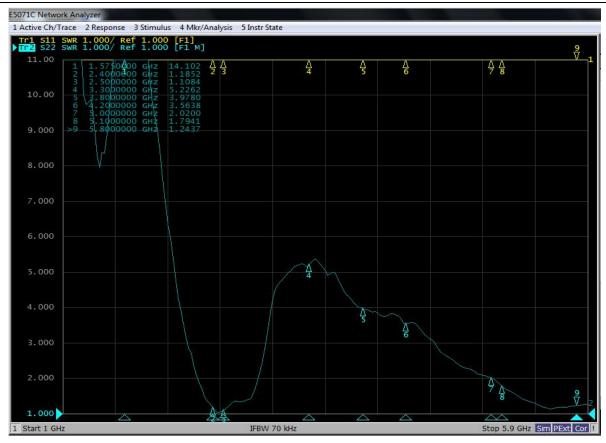


2.4+5.8G WIFI antenna VSWR

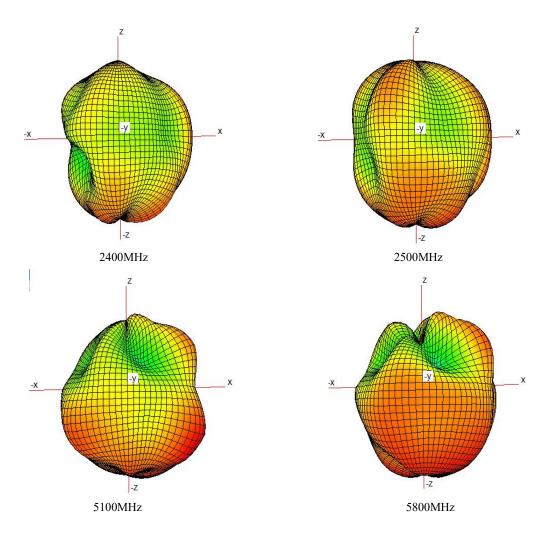

Page 4



2.4 Single antenna test VSWR

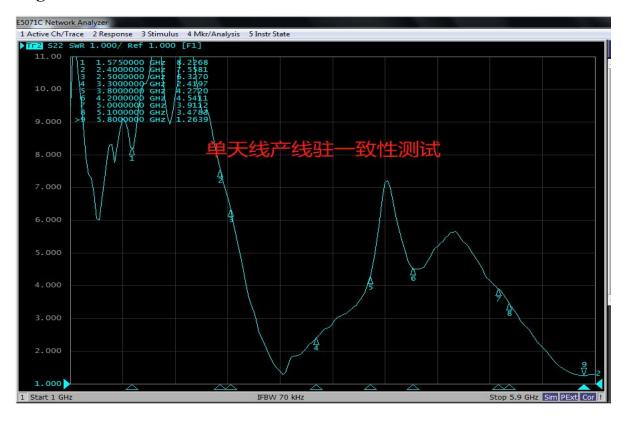

3. Power, Sensiticity Testing

3.1 Testing field

LR Microwave Anechoic Chamber: testing frequency ranges from 400MHz to 6GHz and the 40cm diameter spherical quite zone, the chamber provides less than -90dB reflectivity from 400MHz—6GHz.

3.2 Testing results

The following table indicates the testing results related to Power and Sensitivity in Microwave Anechoic Chamber, concerning the relative diagram.

3.3 Active testing.

SD8-N Antenna efficiency

Freq(MHz)	Gain	Efficiency(%)	Freq(MHz)	Gain	Efficiency(%)
2400	3. 7	63. 44	5360	4.0	61. 23
2410	3. 7	62.40 5380 3.3		3.3	59. 23
2420	3.6	61.91	5400	3.5	60.05
2430	3. 7	62.35	5420	3. 1	59. 54
2440	3.8	61.73	5440	2.8	60.66
2450	3.9	63. 94	5460	2.8	60.16
2460	3.9	63.88	5480	2.6	59. 25
2470	3.9	63. 43	5500	2.6	56.65
2480	3.8	63. 14	5520	2.4	54. 12
2490	3.8	64.01	5540	2.5	56. 58
2500	3. 7	62. 91	5560	2.7	58.01
5100	2.8	50. 95	5580	2.5	56. 77



5120	3.6	56. 55	5600	2.8	56.96
5140	3. 1	53. 50	5620	2.6	56.04
5160	4.0	59. 44	5640	2.8	56.96
5180	4. 2	57. 69	5660	2.0	53.41
5200	4. 2	57. 93	5680	2.8	57.91
5220	4. 3	60.09	5700	5700 2.2	
5240	5.0	64. 17	5720	2.8	58.69
5260	3.8	58.06	5740	2.5	52.60
5280	4. 3	61.68	5760	2.9	56.49
5300	4. 1	60.78	5780	3.0	57.46
5320	3.5	55. 99	99 5800 2.9		57. 57
5340	3.6	60.69			

SD8 Active data

WIFI 1+WIFI 2								
	chNO TRP TIS							
	1	18.62						
11B-11M	6	19.05						
	11	20.1	-82. 01					
	36	18. 35						
11A-54M	56	18. 2						
	165	18.4	-73. 05					
	1	17. 52						
11g-54M	6	17.64						
	11	17. 78	-68. 57					

WIFI 2								
	chN0	TRP TIS						
	1	17. 52						
11B-11M	6	17. 43						
	11	17.85	-81. 15					
	36	17. 46						
11A-54M	56	16. 78						
	165	17.82	-75. 74					
	1	16. 43						
11g-54M	6	16.65						
	11	17.83	-68. 12					

4. Environmental treatment

Antenna mounting diagram










5. Mechanical Dimension Drawing

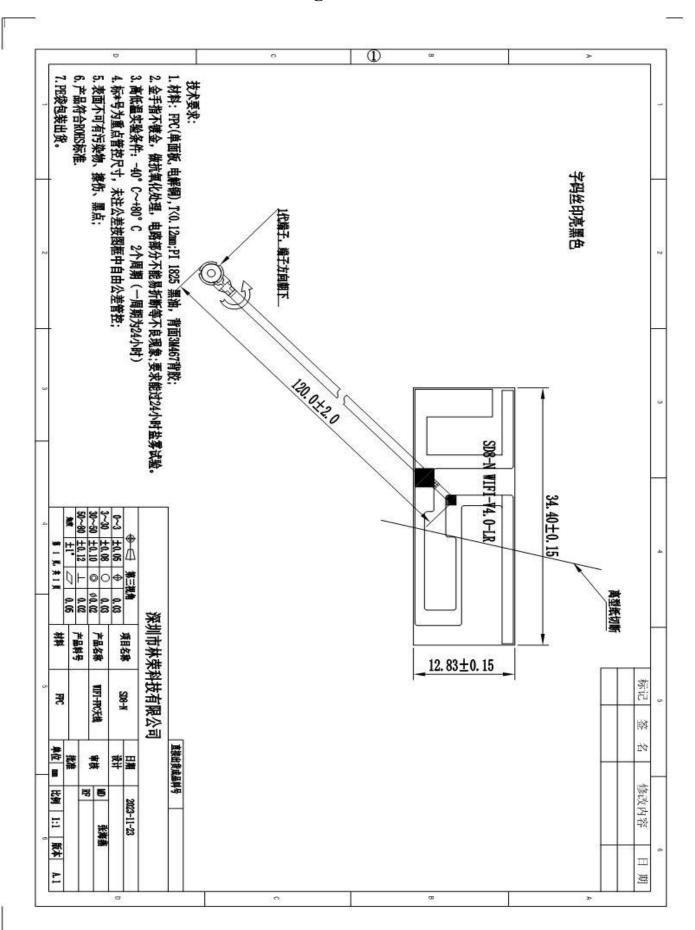



6. Mechanical Dimension Testing report

1			DIM. #	1	2	ω	4	6	7	8	9	6	=	12	ಚ	
中部设计	林荣科技		DIMENSION	120.00	34.40	12.83	1.13	自委工符			W.					
女 多 多 多 本 年 年 年 年 年 年 年 年 年 年 年 年 年 年 年 年			DRAWING ZONE				11									
村质牌号	牌号 / 2023-11-24		+10L	2.00	0.15	0.15	0.05				- 30					
- 2			.101	(2.00)	(0.15)	(0.15)	(0.05)									
			NOTE								- 00					
Part NO(草号) Part Name (學存名學)	(韓本	MEA	SAMPLE 1	121.00	34.47	12.86	1.12									
	名称)	SURED	SAMPLE 2	120.00	34.45	12.90	1.12									
,	6	DIMENS	SAMPLE 3	119.00	34.40	12.87	1.13				42					
03.03.01.000	WINIX SE	MEASURED DIMENSION(实满尺寸)	SAMPLE 1 SAMPLE 2 SAMPLE 3 SAMPLE 4 SAMPLE 5	121.00	34.42	12.85	1.12				200					
8		R 1)	SAMPLE 5	120.00	34.44	12.83	1.13									
Tool Number (養母)		% TOLERA (公差使)	UPPER	50%	47%	47%	0%	4,=38	8							
Cav. Number(/\sqr.)	Rev(版本)	% TOLERANCE USED (公差使用百分比)	LOWER	-50%	0%	0%	-20%		*							
) ladi			0%-25%	×	×	×	×									
3	P.1	1	1	25%-50%		×	×									
	::::::::::::::::::::::::::::::::::::::		50%-75%	×												
		0	75%-100%													
		DISPOSITION	100%+													
5	5	SITI	Re-Measure								- 22					
Omit(#th/)		8	Accept								133					
E			Fix Tool			Ï					10					
76.102	{		Accept With Variance													
	+	ACCEPT	DIMENSION	120.00	34.40	12.83	1.13									
	*	ACCEPTABLE VARIANCE	+T0L	121.00	34.47	12.90	1.13									
2		RIANCE	-101.	119.00	34.40	12.83	1.12				0.0					

备注:除了上述标注的填写内容外,须输入的内容: 1. DIMENSION、+TOL、-TOL、SAMPLE1, SAMPLE2, SAMPLE3

a. 在\$TOLERANCEUSED(公差使用百分比比)中无论是UPPER还是LOWER>100%。须:
(1)检查输入数据是否输入错误;(2)测量数据是否操作有误或是仪器测量不准确;(3)测量时间是否不适宜;(4)排除了(1)(2)(3)外,仍然>100%,请设计师对每个尺寸的后面作出选择即从"Re-measure, Accepet, Re Tool, Accept Virance"中选一,若是选Accept with virance,必须完成后面的Dimension。+TOL:
b. DIMENSION栏中的即尺寸前一栏中的DIM.#必须与图面上的一致;同时注意,在作Gpk的尺寸的尺寸编号与FA1全尺寸测量报告中的尺寸的编号必须是相同的,且Gpk尺寸必须被用符号标注,此标注号必须表示的

意思是指该尺寸为重点管控尺寸,要做Cpk! c.测量工具代号Measure No.; A=callipers(0.00) B=micrometer (0, 000) C=Pin Guage (0.000) D=High Guage (0, 000) E=CAM(0, 000) F=Plug Guage (0, 00) G=R Guage (0,0)



7. Packaging standard

包装说明: 具体包装数量以实物为准, 图片只显示包装的方式, 并非此项目实物。

Packaging Description: the specific packaging quantity is subject to the physical object. The picture only shows the way of packaging, not the physical object of the project



天线用 PE 袋包装

The top cover board, with PE film packaging



防潮防水 PET 袋封装,放于纸箱或胶筐内 Moistureproof waterproof PET bag packaging,

Put in the cartons



纸箱用胶带封口

Carton sealing with duct tape



包装箱整箱外观()

Cases appearance