

beatsgear

Dongle User Manual

FCC Part 15.19

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Part 15.21


Any changes or modifications (including the antennas) to this device that are not expressly approved by the manufacturer may void the user's authority to operate the equipment.

FCC RF Radiation Exposure Statement: This equipment complies with FCC RF Radiation exposure limits set forth for an uncontrolled environment. This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter.


www.beatsgear.com

How to use


1.

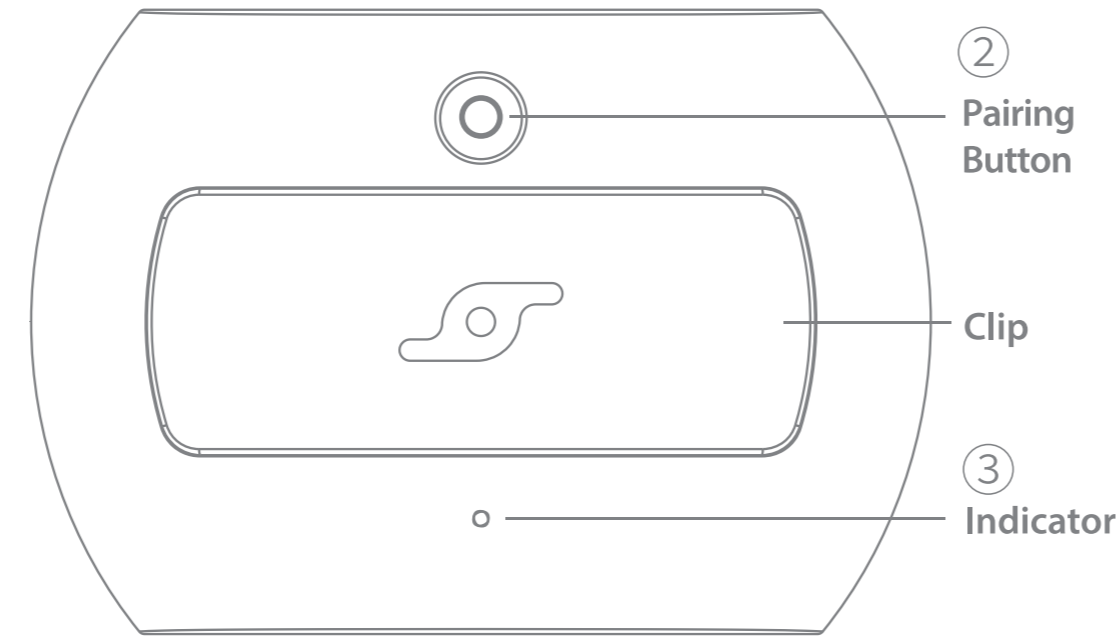

2.

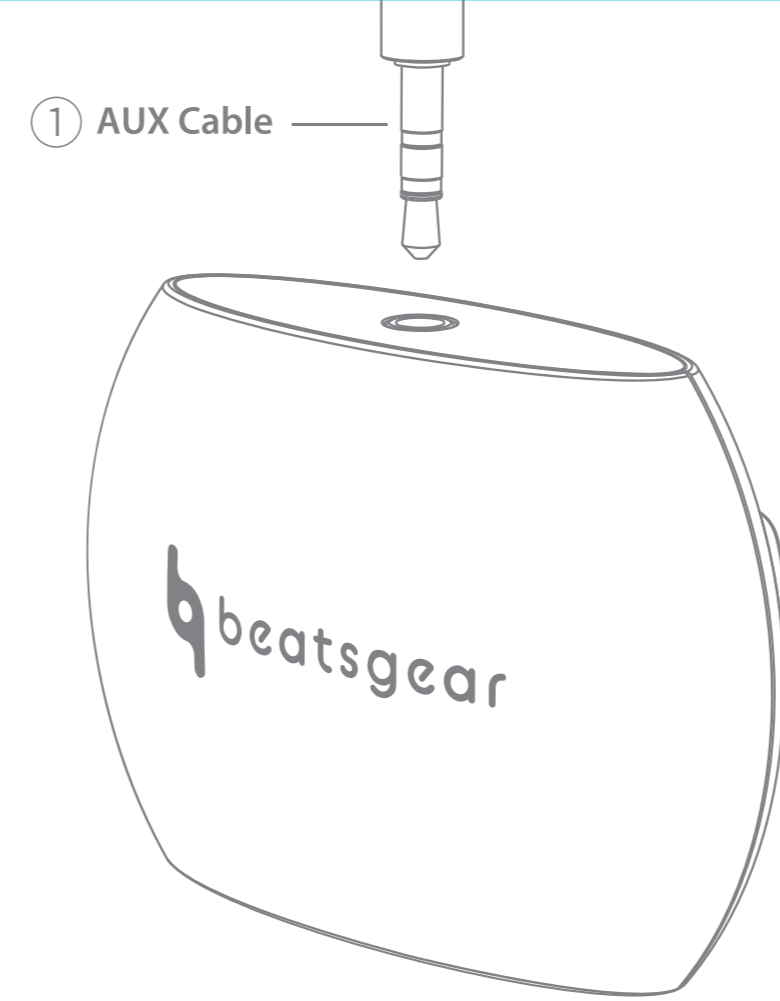

3.

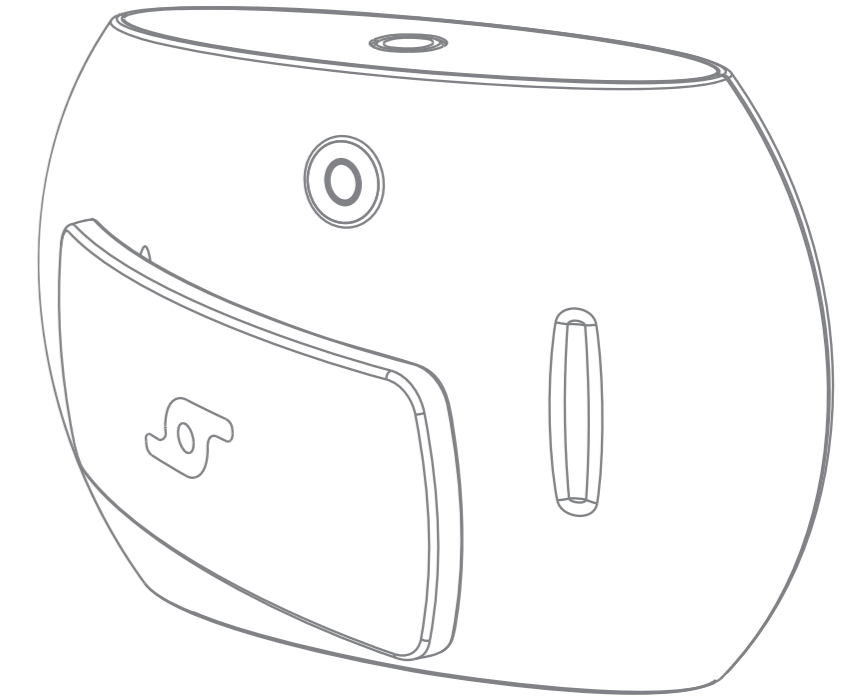

[Basic Usage]

1. Charge the internal battery to the USB C type charging terminal of the beats gear dongle using the enclosed USB cable. Fast chargers are not supported and low speed chargers of 5V 1A or less are recommended.
2. Make sure that the LED ③ turns on green when charging.
3. Download the beatsgear dongle app and install it on your smartphone from Google Playstore or Appstore.
4. Use a 3.5mm sound cable to connect the headphones or line-out terminals of the sound output device to the AUX IN ① terminals of the dongle.
5. If the sound output device does not support the 3.5mm AUX cable, use a separate sound converter (separate purchase).
6. With the dongle powered off, press and hold the power switch ② for 2 seconds to power the dongle. At this point, the LED ③ lights up blue(sky blue when charging).
7. When you power on the beatsgear with the dongle turned on, the dongle and beatsgear are automatically connected and a welcome vibration is emitted from beatsgear.
8. When you open the beatsgear dongle app on your smartphone with the dongle turned on, the app and dongle are automatically connected.
9. When the dongle is turned on, press and hold the switch ② for 2 seconds to turn the dongle off.

[Bluetooth audio device connection]

1. The beatsgear dongle supports the bluetooth audio output. To connect a new bluetooth audio device to the dongle, press the power switch ② for 4 seconds while the power is off to enter the new bluetooth device registration mode. In this process, after 2 seconds, the LED ③ turns on blue, and after 4 seconds, the blue light blinks rapidly twice per second.

2. Turn on the bluetooth audio device and switch to the new device registration mode.
3. When the Bluetooth audio device is properly connected to the dongle, the LED stops blinking.
4. To connect an already registered Bluetooth audio device, briefly press the switch ② once while the dongle is turned on. At this time, the LED blinks in blue once per second and stops blinking when the connection is complete.

[Note]

1. When connecting the beatsgear dongle to the TV, it is recommended to connect the power using the USB port of the TV.
2. The USB-C type charging port is for charging the built-in battery only.
3. It takes about 1 hour and 30 minutes to fully charge the battery, and it can be used for about 3 hours and 30 minutes when used continuously.
4. The beatsgear dongle does not support fast charging of PD, QC, etc.
5. Please use a 5V USB charger and be sure to use a USB-A to USB-C type cable. (Use a charger under 5V 1A)
6. When using the dongle, the LED gradually changes from blue to purple to red as the battery level decreases.
7. In music mode, the LED blinks red and blue according to the beat of the music.
8. Up to two beatsgears can be connected with one dongle.
9. The method of using the dongle-only app is the same as that of the beatsgear app. Please refer to the beatsgear user manual.

[Exchanges and returns]

1. Exchanges and returns due to a simple change of mind or a mistake in order are possible up to 7 days after purchase (shipping costs are borne by the customer). Exchanges and returns are not possible if the product is opened, used, damaged and etc.
2. In case of defective product, exchange or return is possible within 30 days of purchase.

[Specification]

Product name: beatsgear dongle
Model name: bgear-DI100
Material: PC/ABS and metal
Country of manufacture: South Korea
Manufacturer: Beatsnine Inc.
A/S: +82-31-716-8012

[Warranty and Service]

- The warranty period is 1 year from the date of purchase(Based on the date of manufacture and purchase of the product)
- A/S is not available for disassembly, arbitrary damage, or arbitrary repair of the product
- Appearance and specifications are subject to change without notice for performance improvement

support@beatsnine.com