
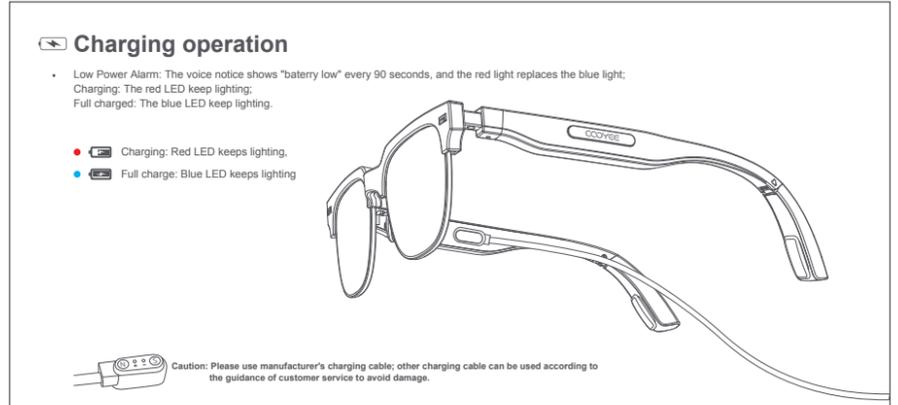


单位	可怡科技	尺寸	中文版120*56mmmm (120*336mm展开尺寸)	公差	±2 mm	比例	1 : 1
品名	CY01骨传导智能眼镜英文说明书5折页	材质	105双铜	绘图		版本	R0
料号		工艺	4C+折页	审核		日期	2021.05.17

正面

背面

封面

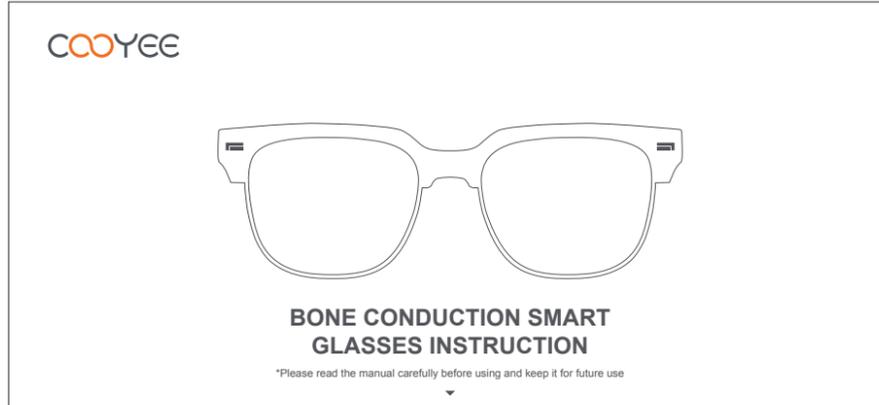

Function overview

Basic Parameters

- Bluetooth Version: V5.0 Classic
- Bluetooth Distance: 15 meters
- Waterproof Grade: Common waterproof standard
- Talk Time: 4H
- Working Frequency: 300-3KHz
- Net Weight: About 45g
- Battery Capacity: Lithium Polymer 140mAh
- Working Temperature: Minus 20-60 °C
- Charging Time: 1-2h
- Apple Volume Sync: Support
- Standby Current: < 0.5mA
- Component Materials: TR90, Aluminum Titanium Alloy, Silica Gel, etc
- Audio Format: Noise Reduction, Support CVC, APTX, SBC, AAC, etc

DIY Accessories

- The Metal Frame / Lens replaceable solution
- Lens can be replaced with sunglasses, flat lenses, myopia lenses, etc.

Adjustment of Glasses Frame

- The longest state of the glasses frame is adjusted by default. The user can shorten the glasses frame according to their face shape.
- The methods are as follows:
 - Loosen the screw on below picture;
 - Gently push the potable legs forward the frame, 2 different lengths optional; Visually push to the corresponding screw hole position
 - Tighten the screw slightly to proper standard. Pay attention not to use too much force to avoid breaking the screw.

Power ON / OFF

- Power On:** long press the right glasses frame touch button for 5 seconds, voice notice "power on", red and blue lights flash alternately, power on success;
- Power Off:** In any mode, long press the right glasses frame touch button for 5 seconds, voice notice "power off", red and blue lights on for 1 second, power off is successful; without any connection for 5 minutes, device automatically power off, voice notice "power off" red and blue lights on for 1 second.

Bluetooth Pairing Connection:

- Power on mode:** The mobile phone will automatically enter pairing mode, turn on Bluetooth, search pairing name "Smart CY01" to connect, voice notice "connected", blue light flash twice in 5 seconds;
- Disconnect:** When the device is disconnected from Bluetooth, voice notice "disconnected" red and blue lights flash alternately;
- Automatic connect:** Long press to power on, and then device automatically connect the mobile phone, voice notice "connected" and the red and blue lights flash together for 1 second;
- In the shutdown mode,** long press the main button for 5 seconds to start the device, and the red and blue lights flash alternately; if the pairing is not successful within 5 minutes, the device will be shut down automatically;
- In the shutdown mode,** the machine will automatically search for connection when it is started; if doesn't auto-connected, Bluetooth will enter the pairing mode, and the red and blue lights flash alternately.

Phone Call

- Incoming call:** Voice notice "Tone", blue light flash twice in 2 seconds;
- Receiving call:** Touch the main button once to connect the call; Voice notice "Tone", blue light flash twice in 2 seconds
- End call:** Touch the main button and voice notice "tone";
- Reject call:** Long press the main button for 1 second when ringing, voice notice "tone"
- Incoming Call:** Answer incoming phone call, short press the main button once, voice notice "tone"

Listen to Music

- Volume Adjustment:** Device can auto remember the latest adjusted volume when you on the phone or listen to music;
- Play Music:** Standby mode -> Slightly press the main button once to play music, the red and blue lights flash once in 5 seconds;
- Pause Music:** Playing music->Slight press the main button once to pause music, the blue lights flash twice in 5 seconds;

Call Voice Assistant

- Standby or Listen to Music:** Double click the touch button on right glasses frame to activate / close the voice assistant.
- Touch the main button twice to activate / close the voice assistant.

Sound Transmission Mode

- After Wearing:** the end tail of the glasses frame can be moved to contact the back of the ear closely, which can transmit sound and strengthen the firmness of the glasses; multiple angle adjustment can be made to select the suitable wearing mode.

Packing List

Precautions

- Don't over press and bend.
- Don't put in 60 °C or above to avoid battery damage
- Don't soak in water.
- Don't use sharp knives to pierce or cut the glasses mirror to avoid damaging the circuit;
- The shell of the frame can't be disassembled, in case of maintenance, you need to consult professionals first;
- The charging cable should be standard, if the charging cable is not standard, it may short-circuited due to the opposite positive and negative levels;
- Please use 5V adapter to charge, otherwise, Bluetooth glasses will be damaged;
- The adjusting screw should not be tightened to prevent the screw from broken due to excessive torque;
- Users can choose the appropriate volume according to the use scene, such as outdoor or indoor, to achieve the best consideration of external sound and keep better privacy.

FCC Regulatory Compliance

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- this device may not cause harmful interference, and
- this device must accept any interference received, including interference that may cause undesired operation.

changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warranty Card

For your rights and interests, please fill in the warranty card carefully and keep it properly as the certificate before maintenance.

Purchase date	Product model
User name	Telephone number
Warranty content	
Warranty date	

Random parts are not covered by the warranty

Service hotline: 0755-29613260

Certificate

Model Number: SMART CY01

QC Inspector:

Date of Manufacture: _____

Brand Owner: Shenzhen Keyi Technology Co., Ltd
Address: Address: 21 F, block B, building 4, Baoxin Science and Technology Park, No.9 Guangyuan fifth road, Fenghuang street, Guangming District, Shenzhen
Service hotline: 0755-29613260

Warning

Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.

Leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas.

A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.