



Type_3 Antenna Design Layout Guidelines & Pattern

1.天線具體尺寸規格如下(mm):

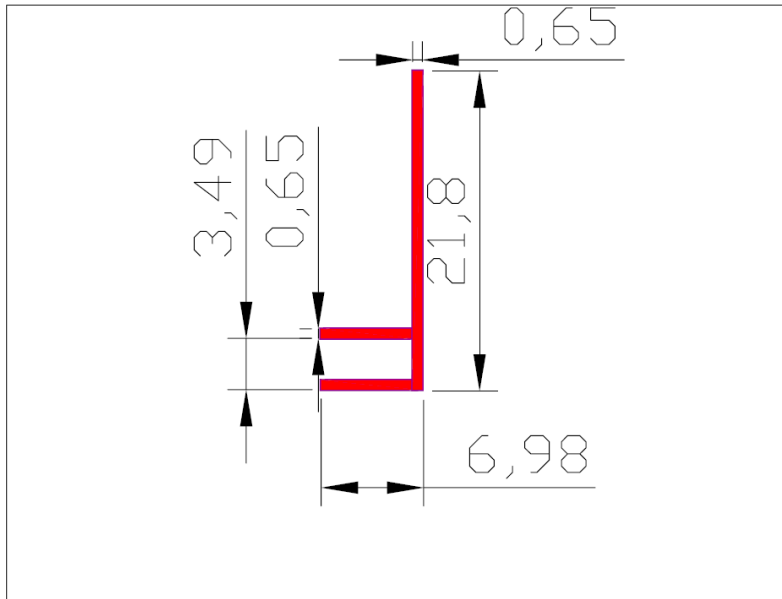


3.天線量測及場形模擬結果如下:

*返回損耗(Return Loss) / 駐波比(VSWR)量測:

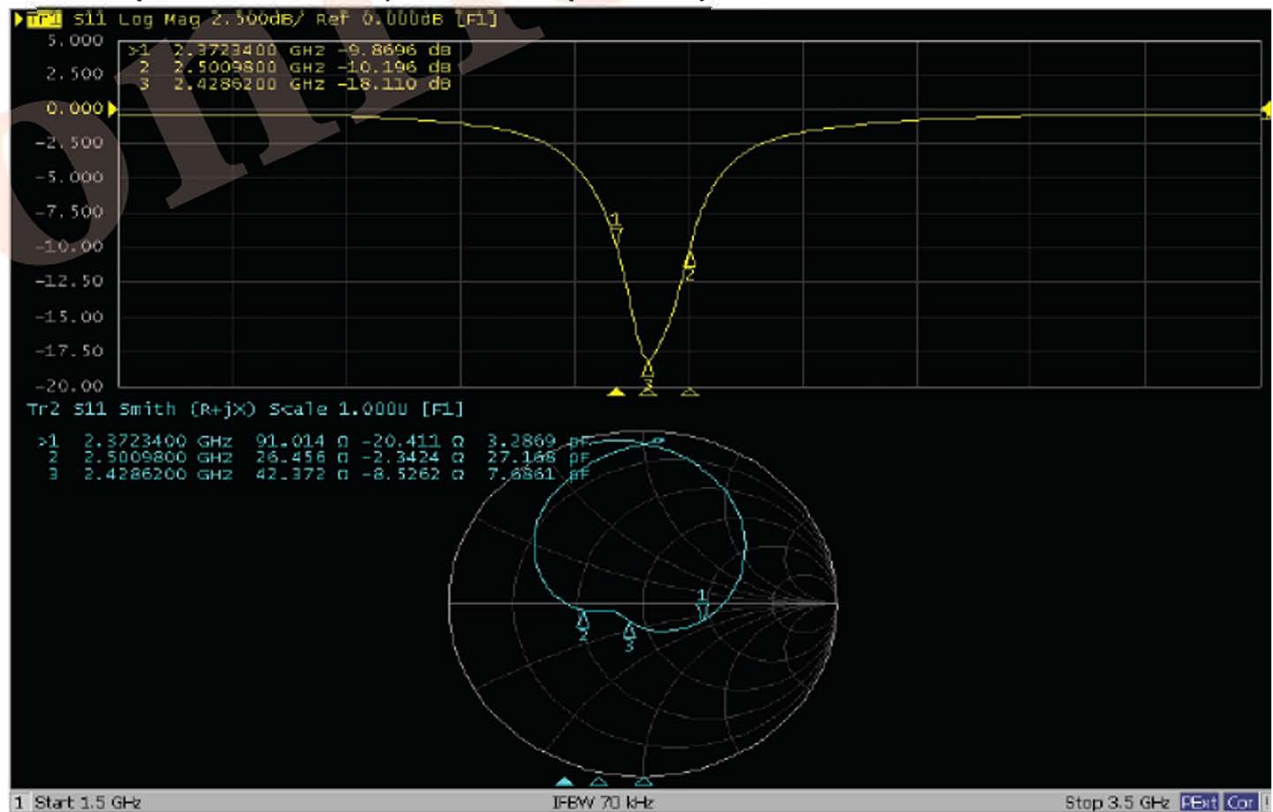



***2D場形模擬圖:**

Name	Theta	Ang	Mag
m1	-4.0000	-4.0000	-5.0989
m2	178.0000	178.0000	-5.0381
m3	80.0000	80.0000	-4.9901

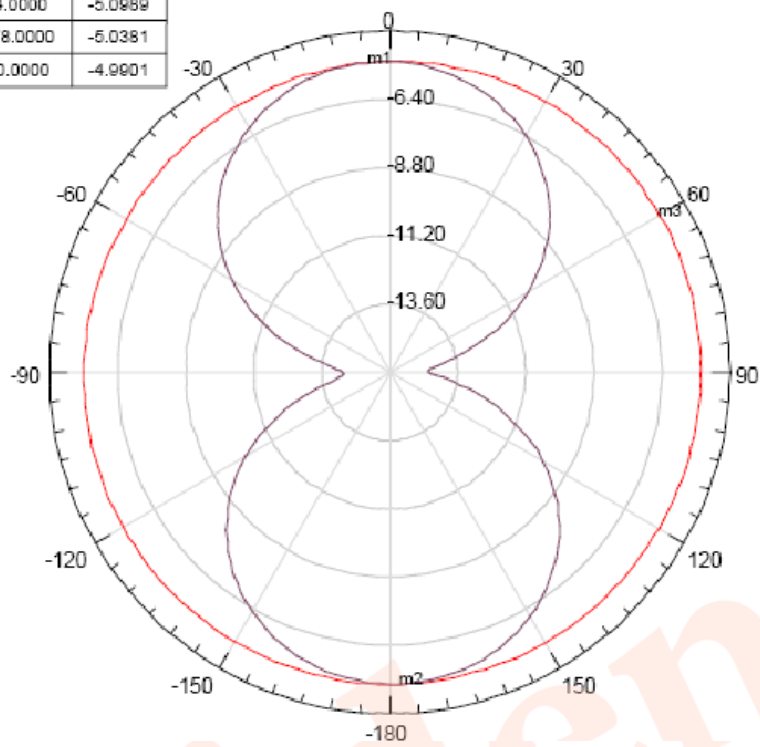

Curve Info	
—	dB(GainTotal)
Setup1 : Sweep1	Phi='0deg'
—	dB(GainTotal)
Setup1 : Sweep1	Phi='90deg'

***3D場形模擬圖:**

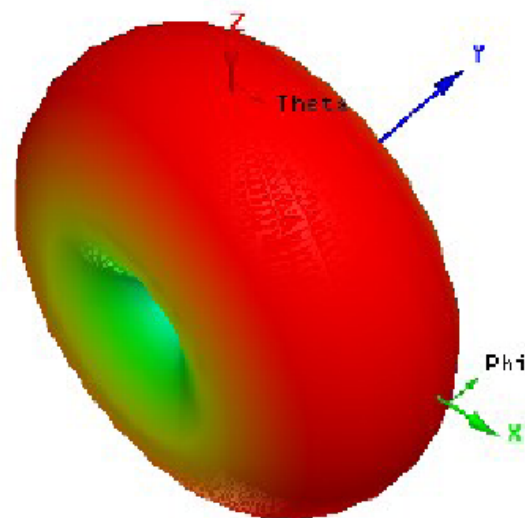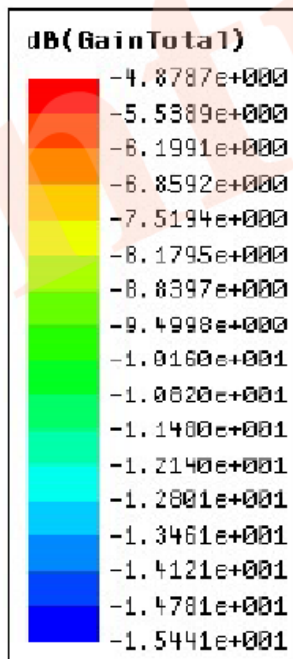

(圖示五)

由上面量測及模擬後可得知此款天線的增益約只可達到-5dBi左右.


4.天線實際場形(強)測試如下:

Summary

ITEM	SPEC.	
Antenna Type	Type_2_Single Wiggle Antenna	
Center Frequency	2435 MHz	- 0.71 dBi
	2451 MHz	- 0.84 dBi
	2479 MHz	- 1.75 dBi
Max. GAIN	- 0.71 dBi	
Mini. GAIN	- 55.15 dBi	
AVG GAIN	- 8.4 dBi	
DUT Polarization	Horizontal & Vertical	
TEST Output Power Level	10dBm	
Impedance	50 Ω	


(表一)

Center Frequency _2435MHz
* DUT _Horizontal

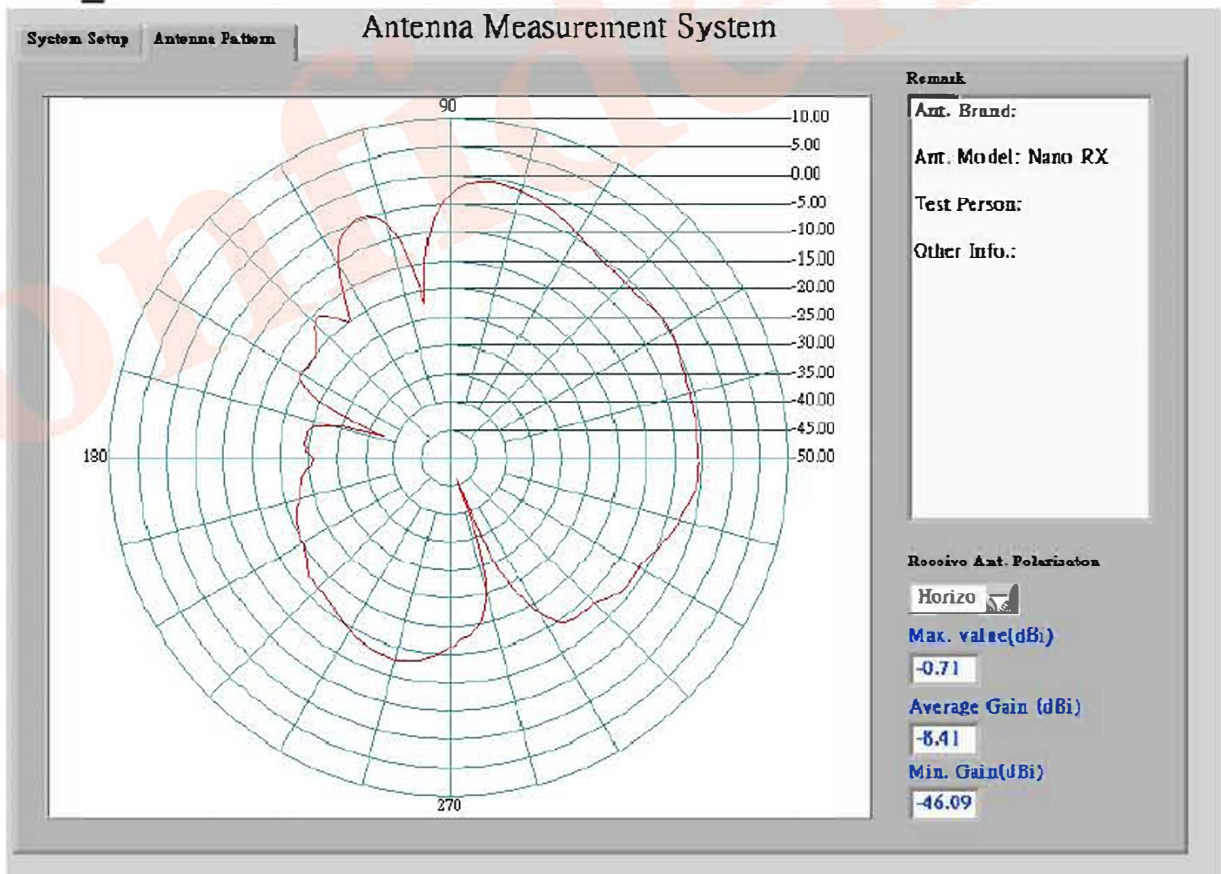

Antenna Measurement System

System Setup | Antenna Pattern

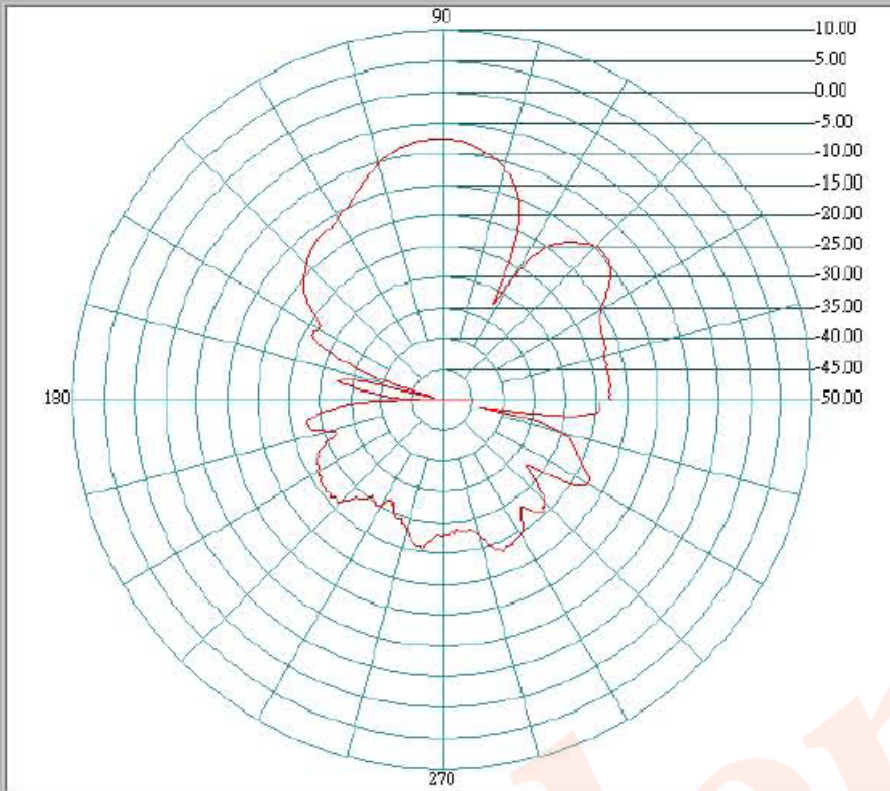

Remark

Ant. Brand:
Ant. Model: Nano RX
Test Person:
Other Info.:

Receive Ant. Polarization

Vertical

Max. value(dBi)

-7.73



Average Gain (dBi)

-17.19


Min. Gain(dBi)

-55.15

* DUT_Verical

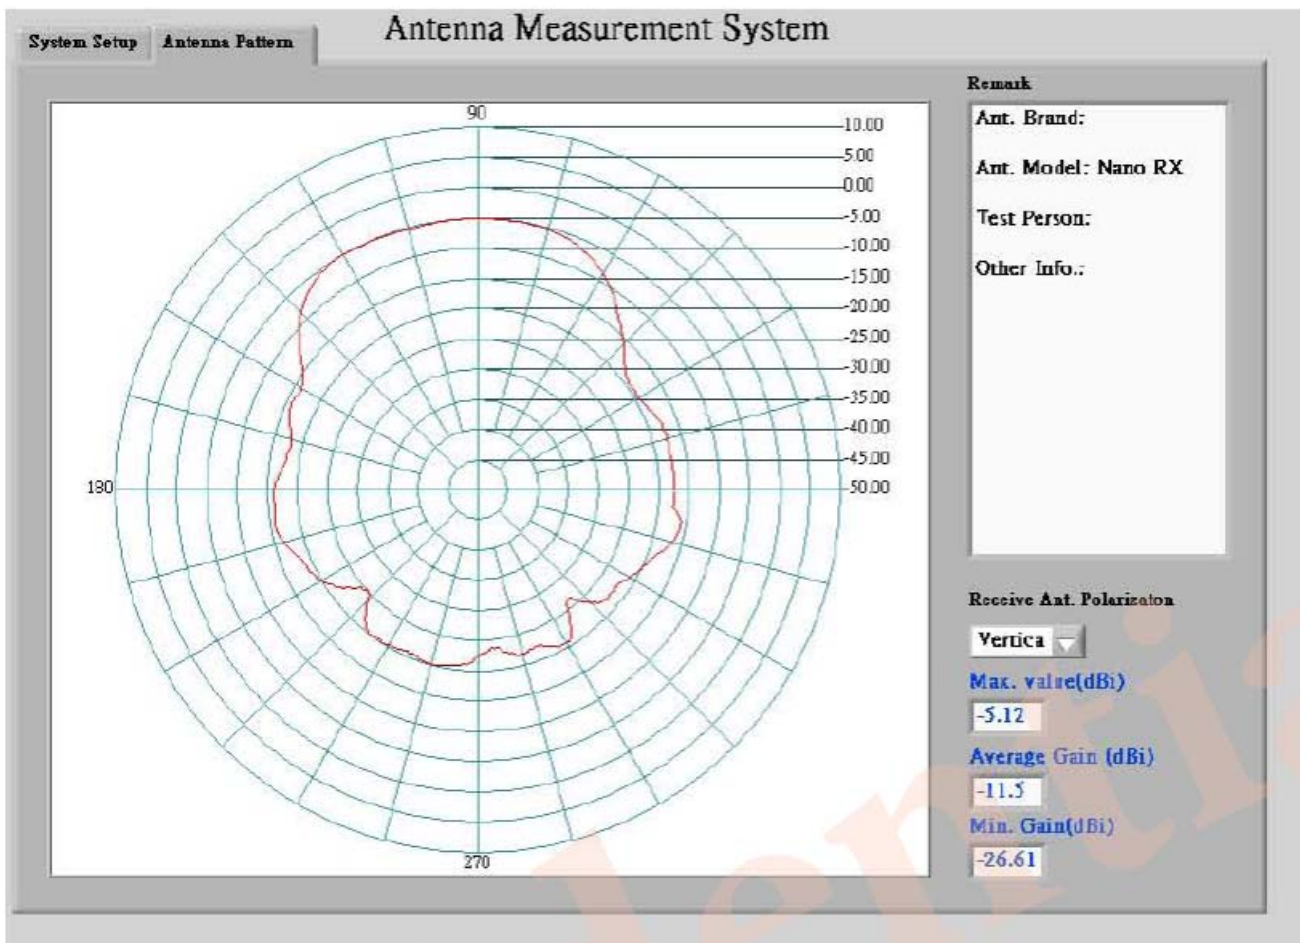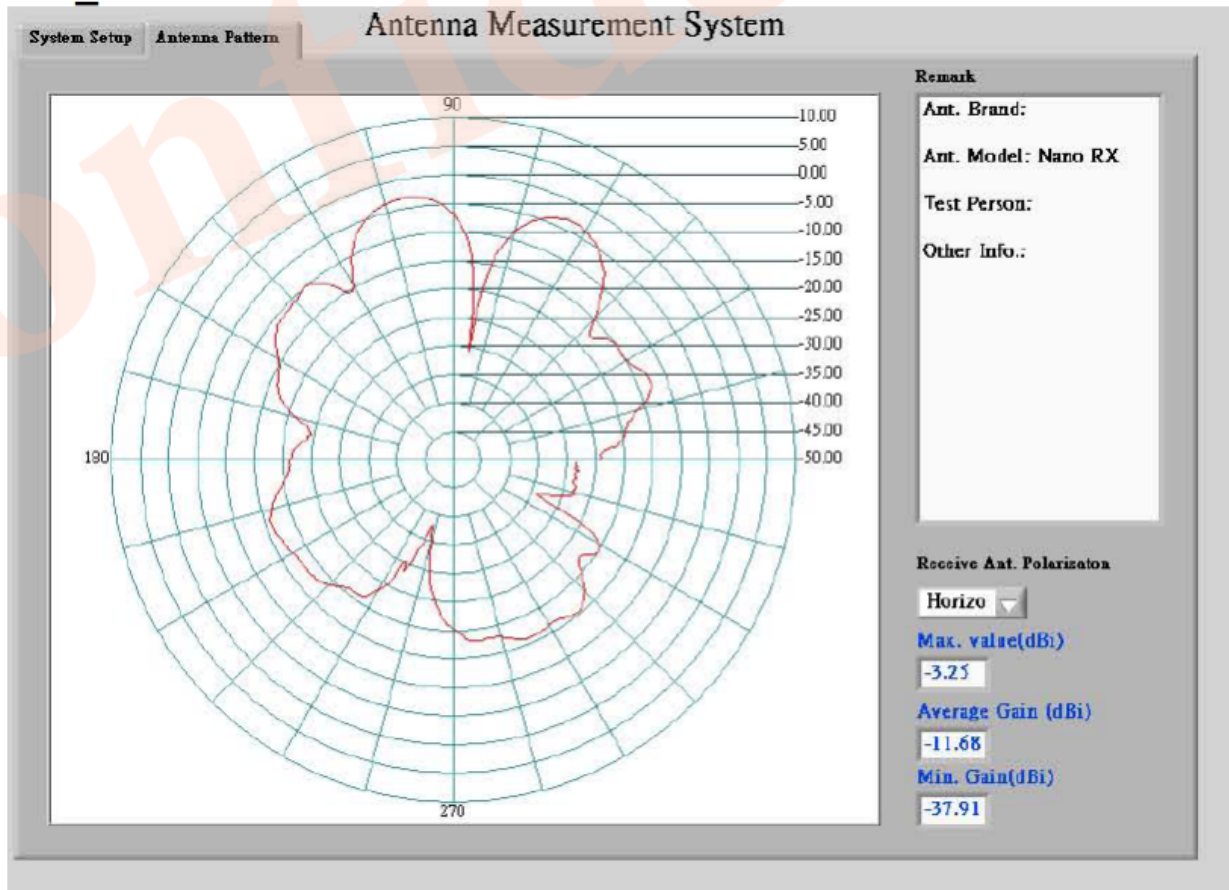


Center Frequency 2451MHz
*DUT_Horizontal

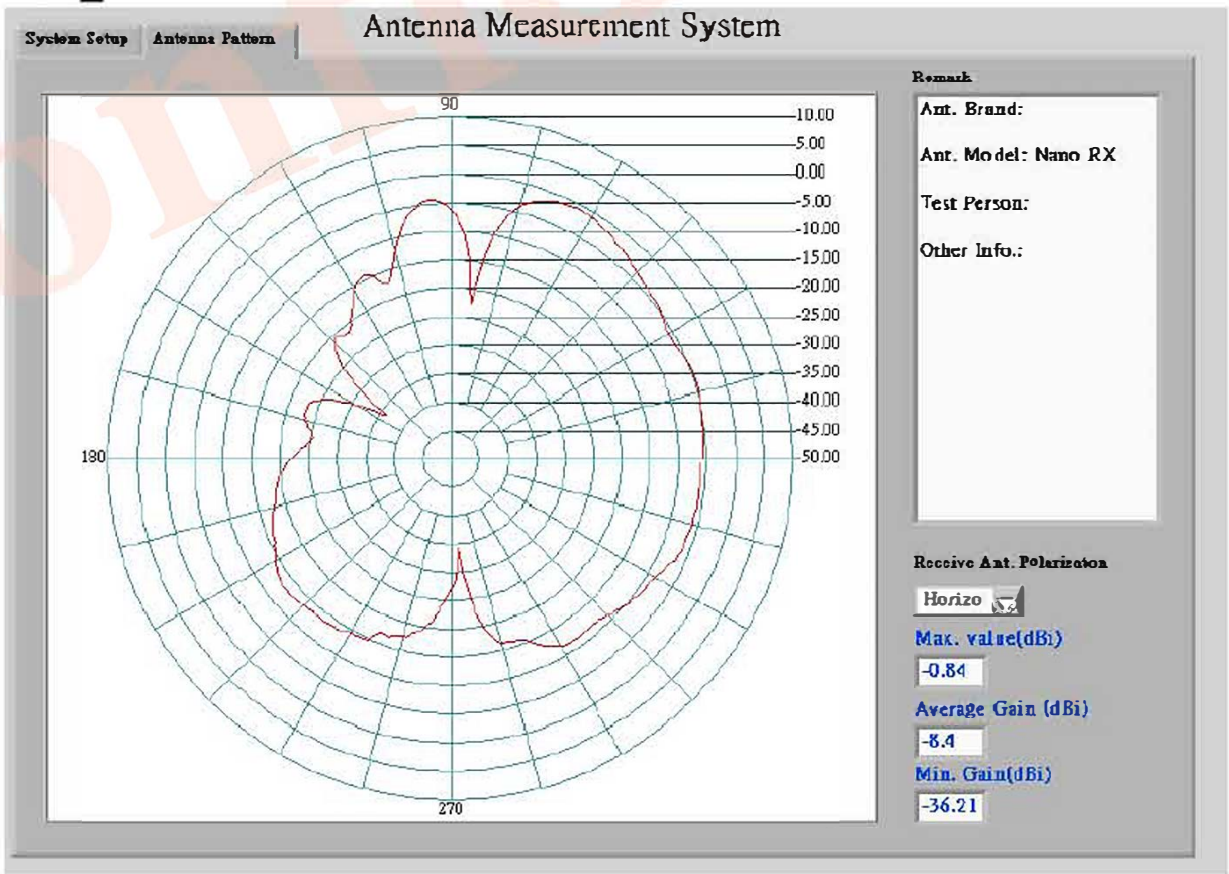

Antenna Measurement System

System Setup | Antenna Pattern

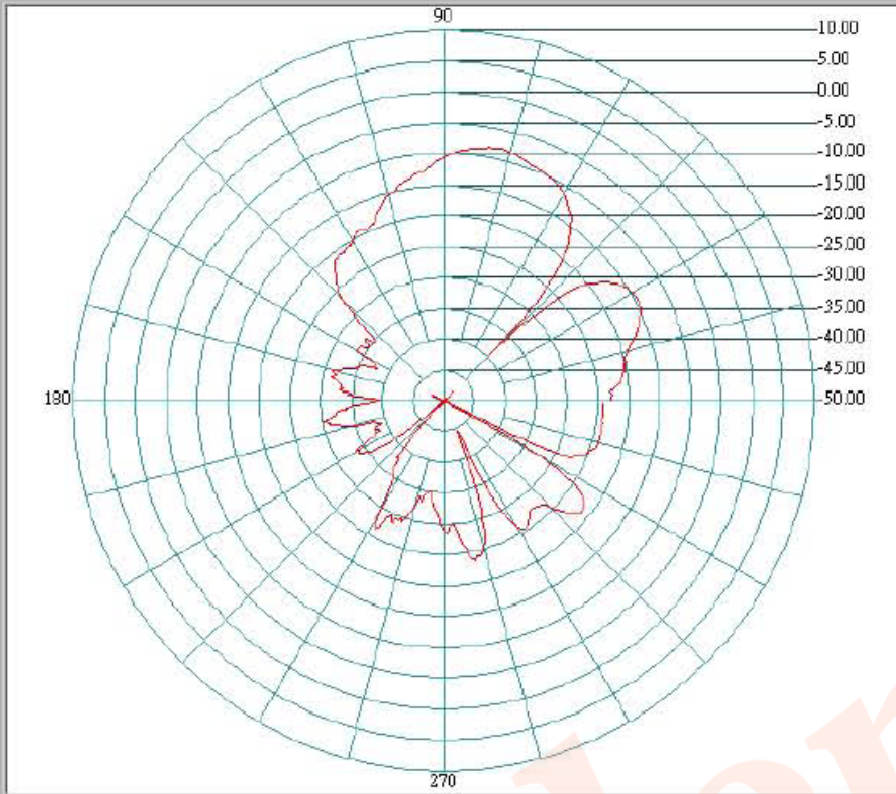

Remark

Ant. Brand:

Ant. Model: Nano RX

Test Person:

Other Info.:

Receive Ant. Polarization

Vertica

Max. value(dBi)

-8.3


Average Gain (dBi)

-17.74

Min. Gain(dBi)

-52.24


* DUT_ Vertical

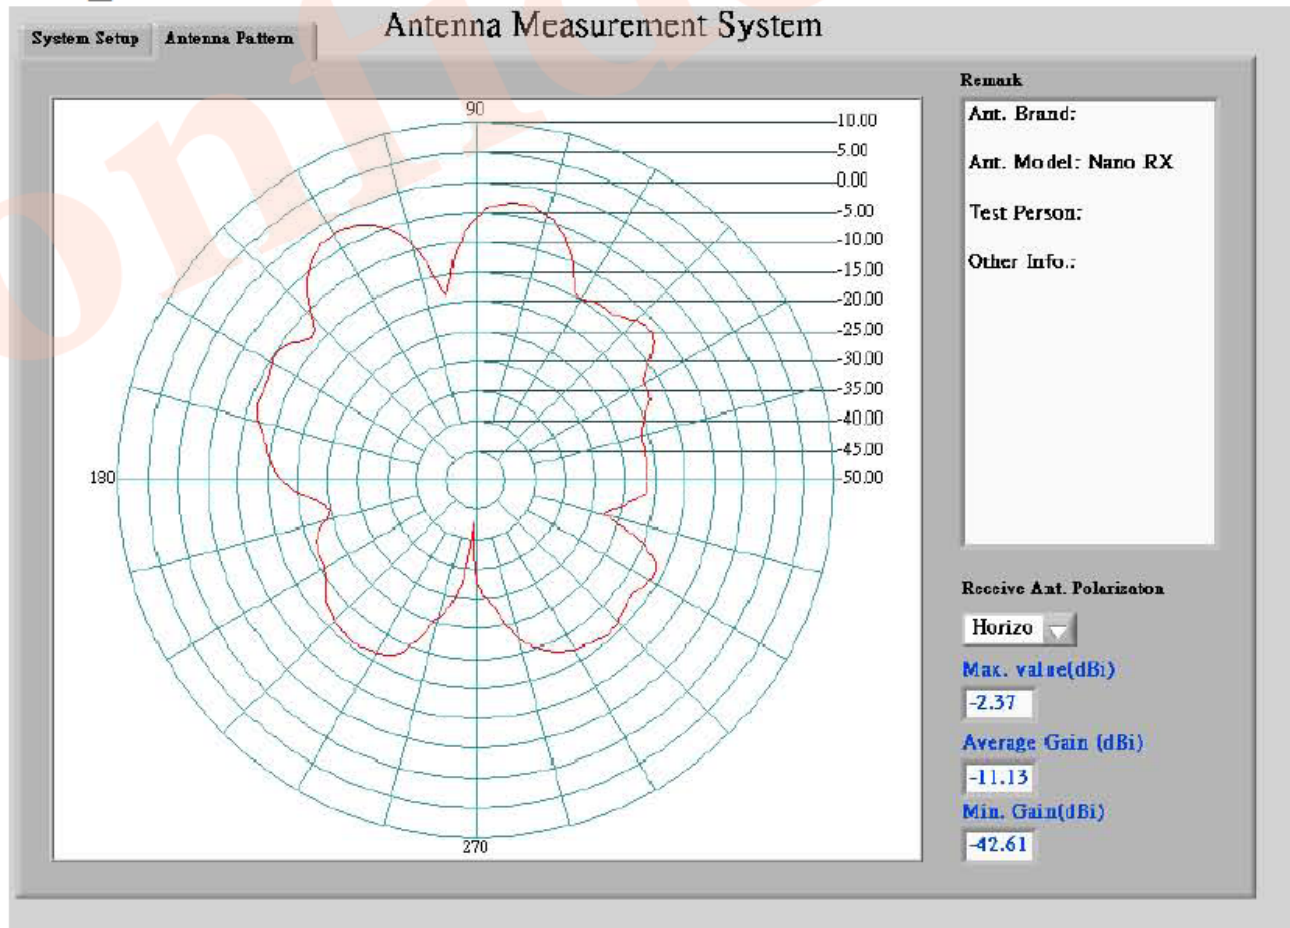

System Setup

Antenna Pattern

Antenna Measurement System

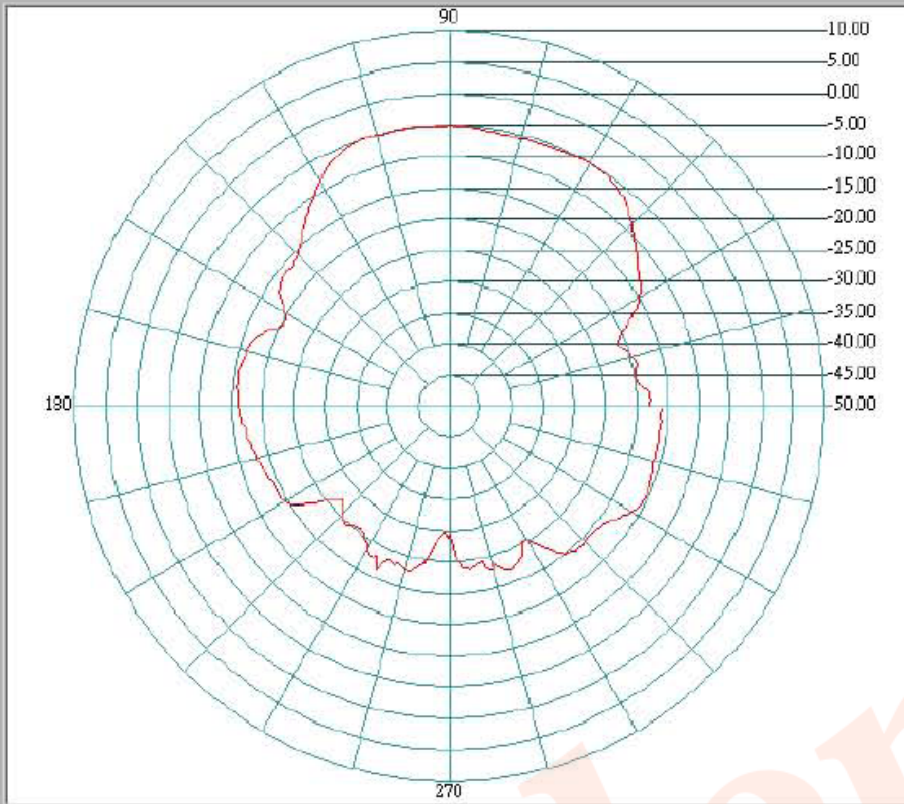

Remark

Ant. Brand:

Ant. Model: Nano RX

Test Person:

Other Info.:

Receive Ant. Polarization

Vertica

Max. value(dBi)

-5.09


Average Gain (dBi)

-11.46

Min. Gain(dBi)

-29.87


Center Frequency _2479MHz
* DUT_ Horizontal

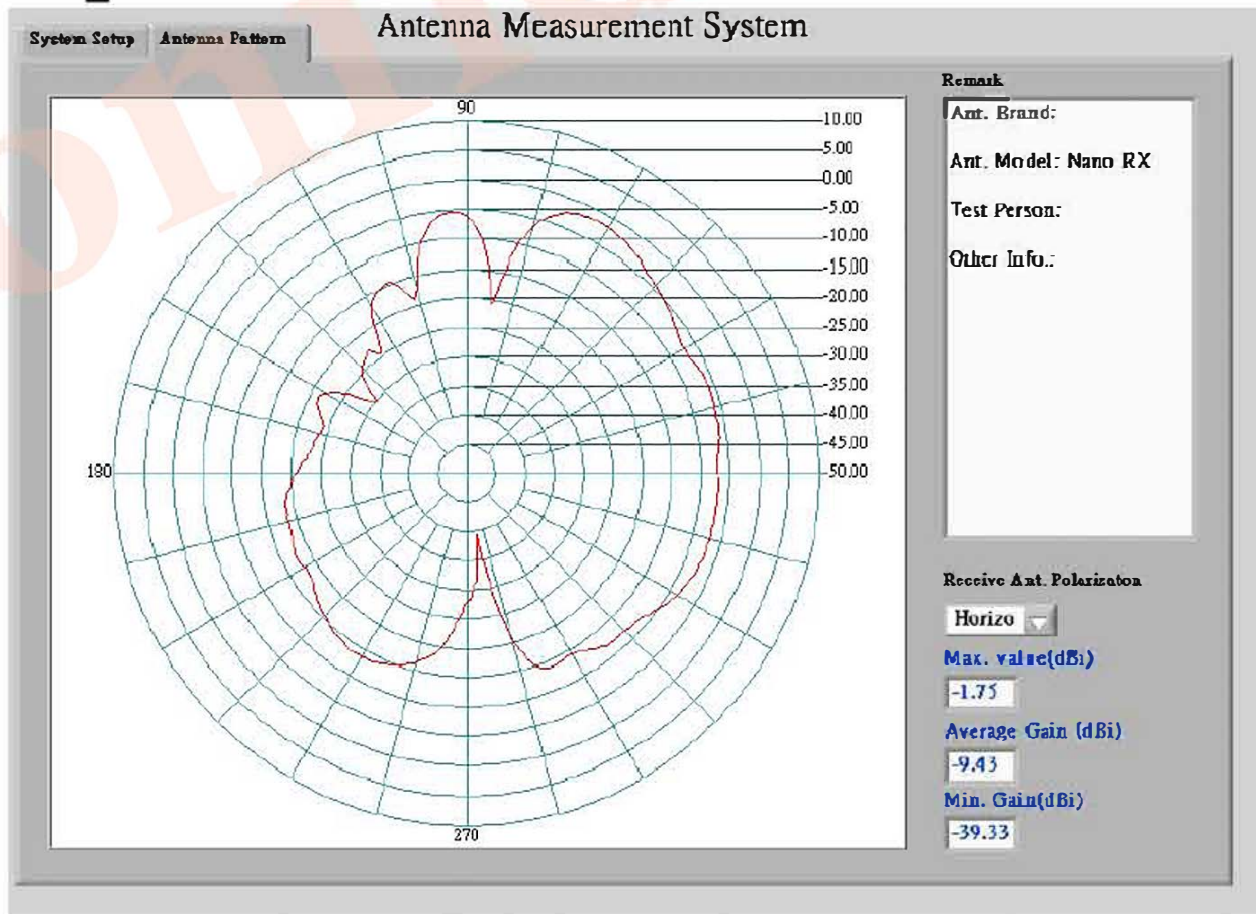

System Setup

Antenna Pattern

Antenna Measurement System

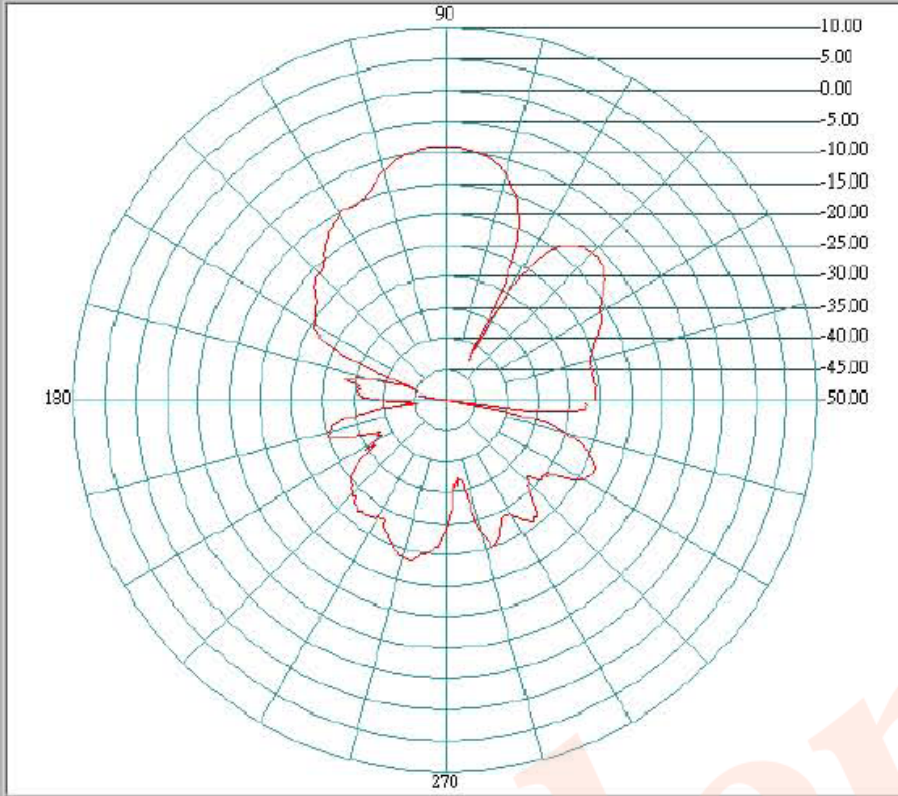

Remark

Ant. Brand:
Ant. Model: Nano RX
Test Person:
Other Info.:

Receive Ant. Polarization

Vertica

Max. value(dBi)

-9.14


Average Gain (dBi)


-18.54

Min. Gain(dBi)

-54.11

* DUT_Vertical

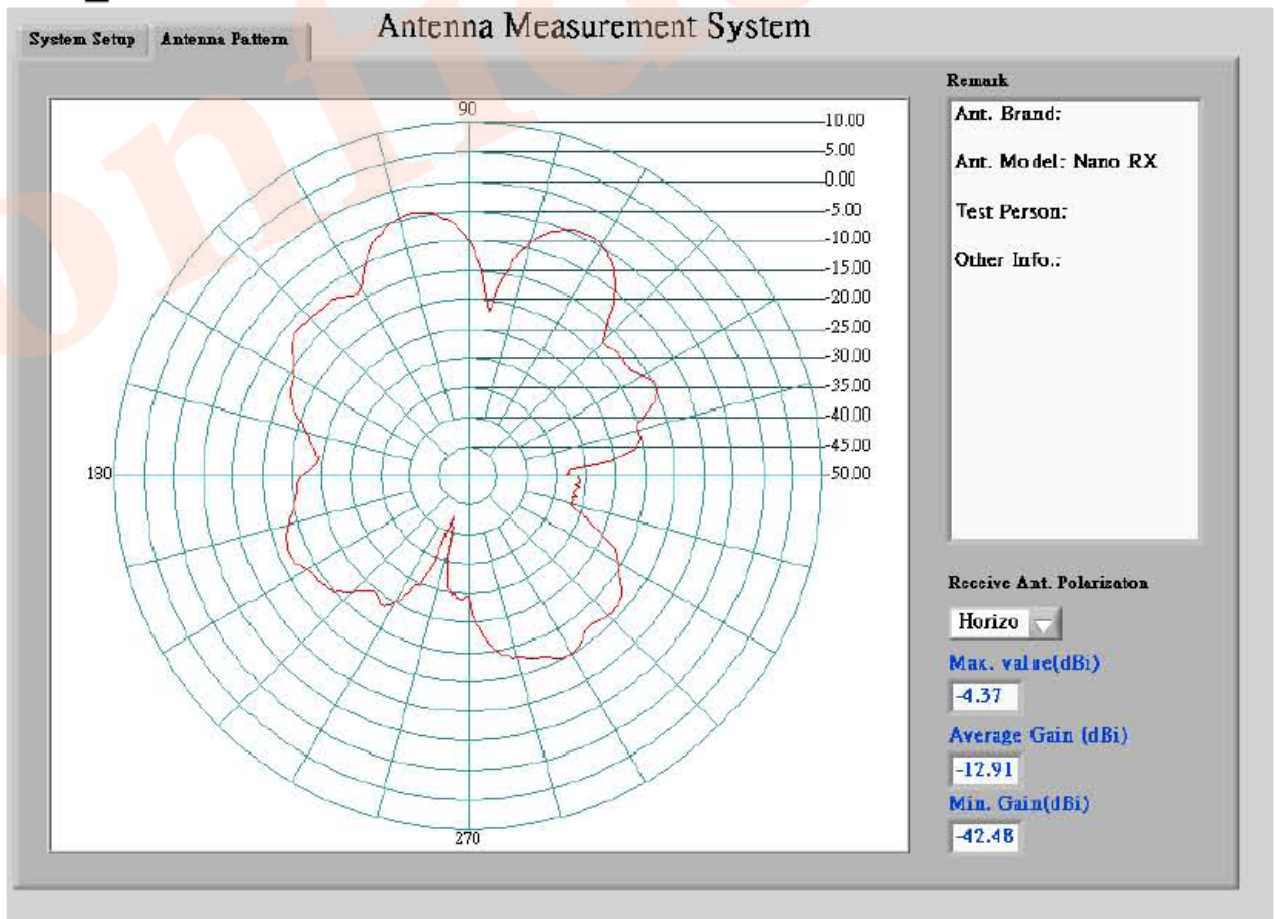

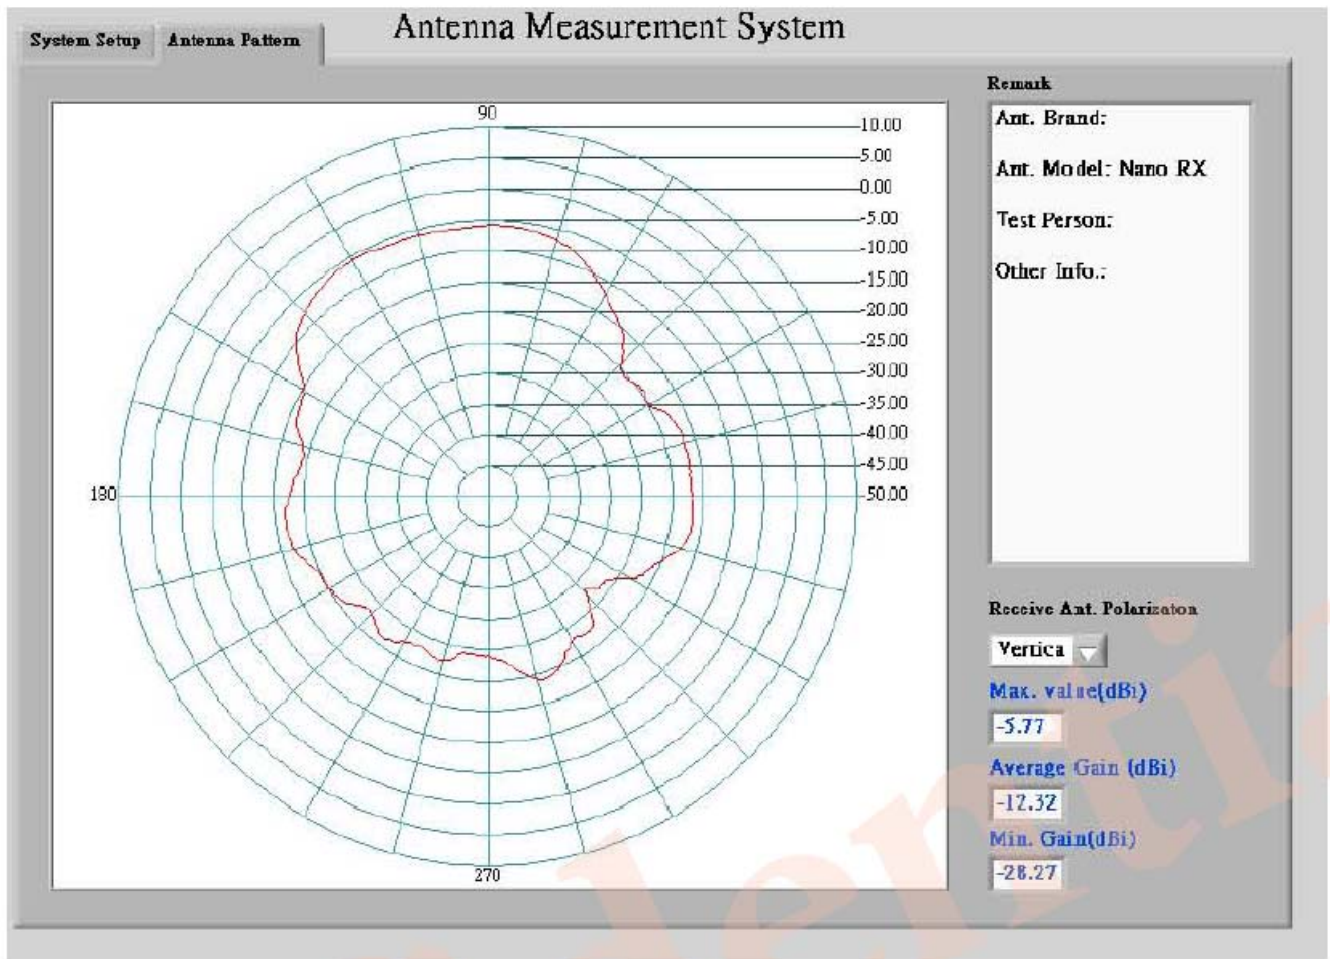

5.結論

經由上面的綜合量測後可得知此款天線的增益確實只可達到-5dBi左右其最大的增益約在-0.71dBi.