

Antenna Test Reports

Customer

TIANYIN

Part No.

PV002

Authorized By

Hanny

Date

2023/04/28

OUTLINE

1. Measurement Information

1. Antenna Type
2. Antenna Solution Detail

2. Antenna Characteristics

1. Return Loss
2. Antenna Efficiency and Peak Gain
3. 2D Radiation Patterns

3. Summary


1.1 Antenna Type

The Antenna Type : PV002


Antenna picture:



1.2 Antenna Solution Detail

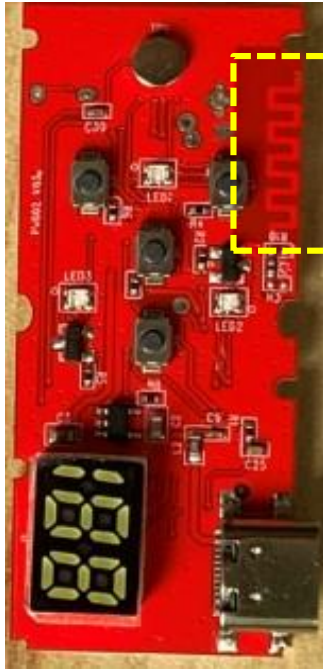


Matching value

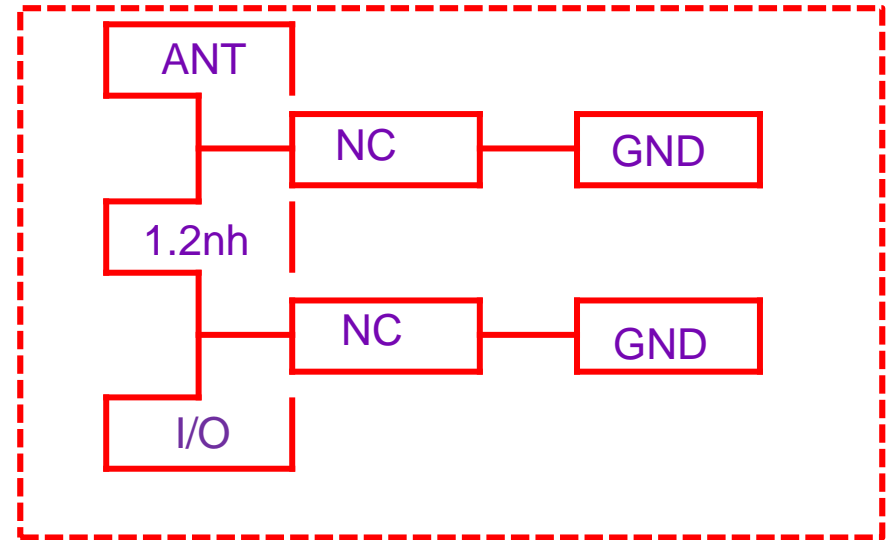


2. Antenna Characteristics


2.1 Return Loss

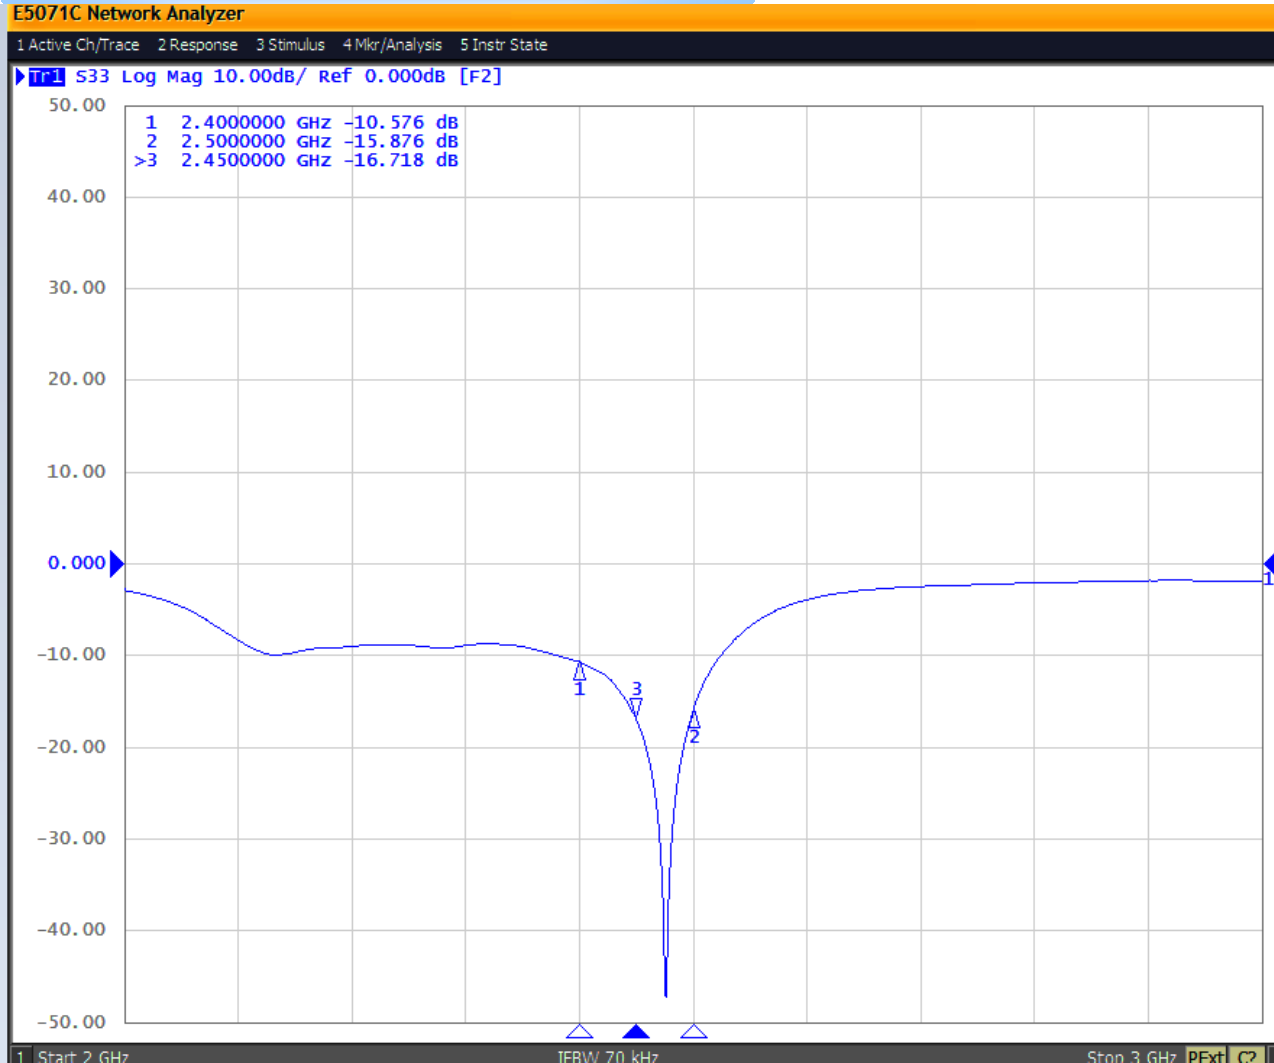

2.2 Antenna Efficiency and Peak Gain

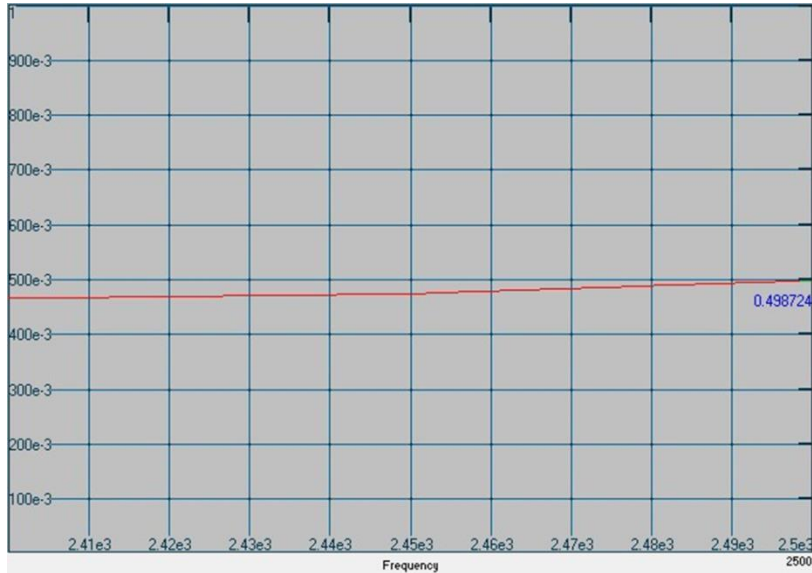


Maximum Efficiency at 2500 MHz : 49.87%

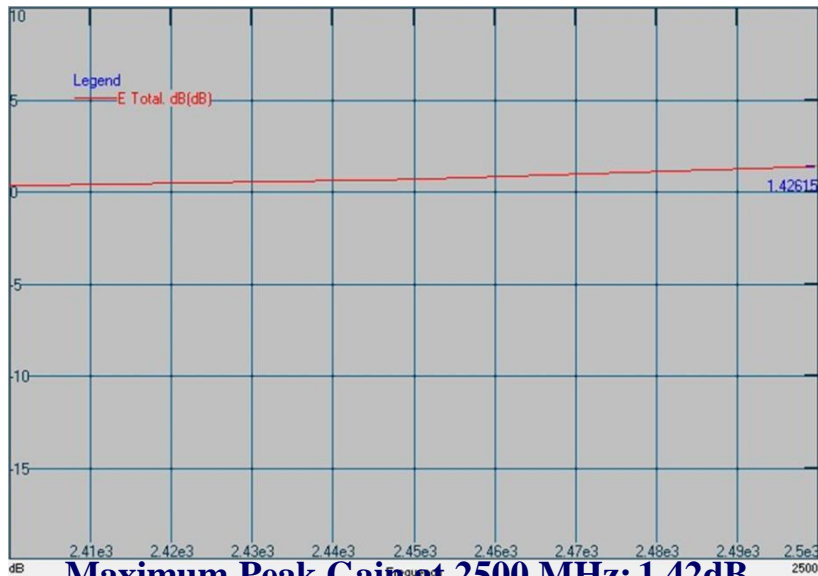


Maximum Peak Gain at 2500 MHz: 1.42dB

2450MHz

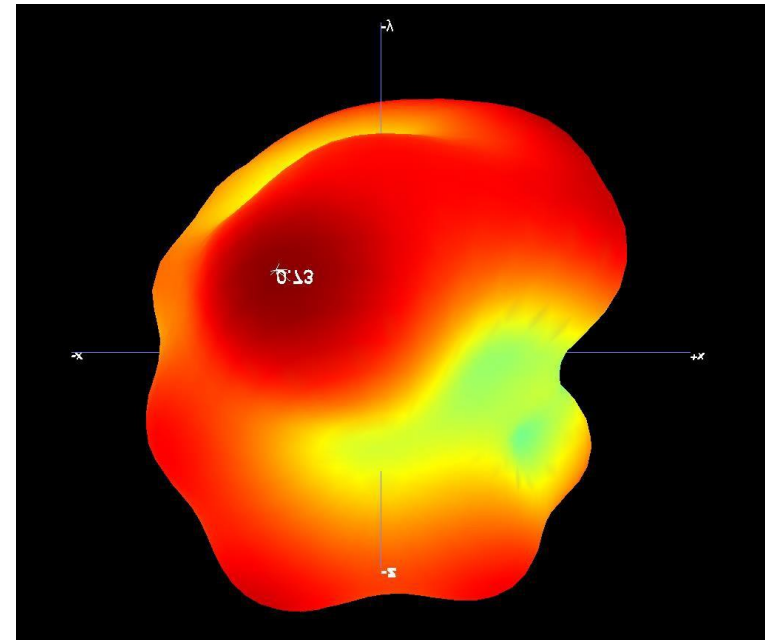

2.3 2D Radiation Patterns

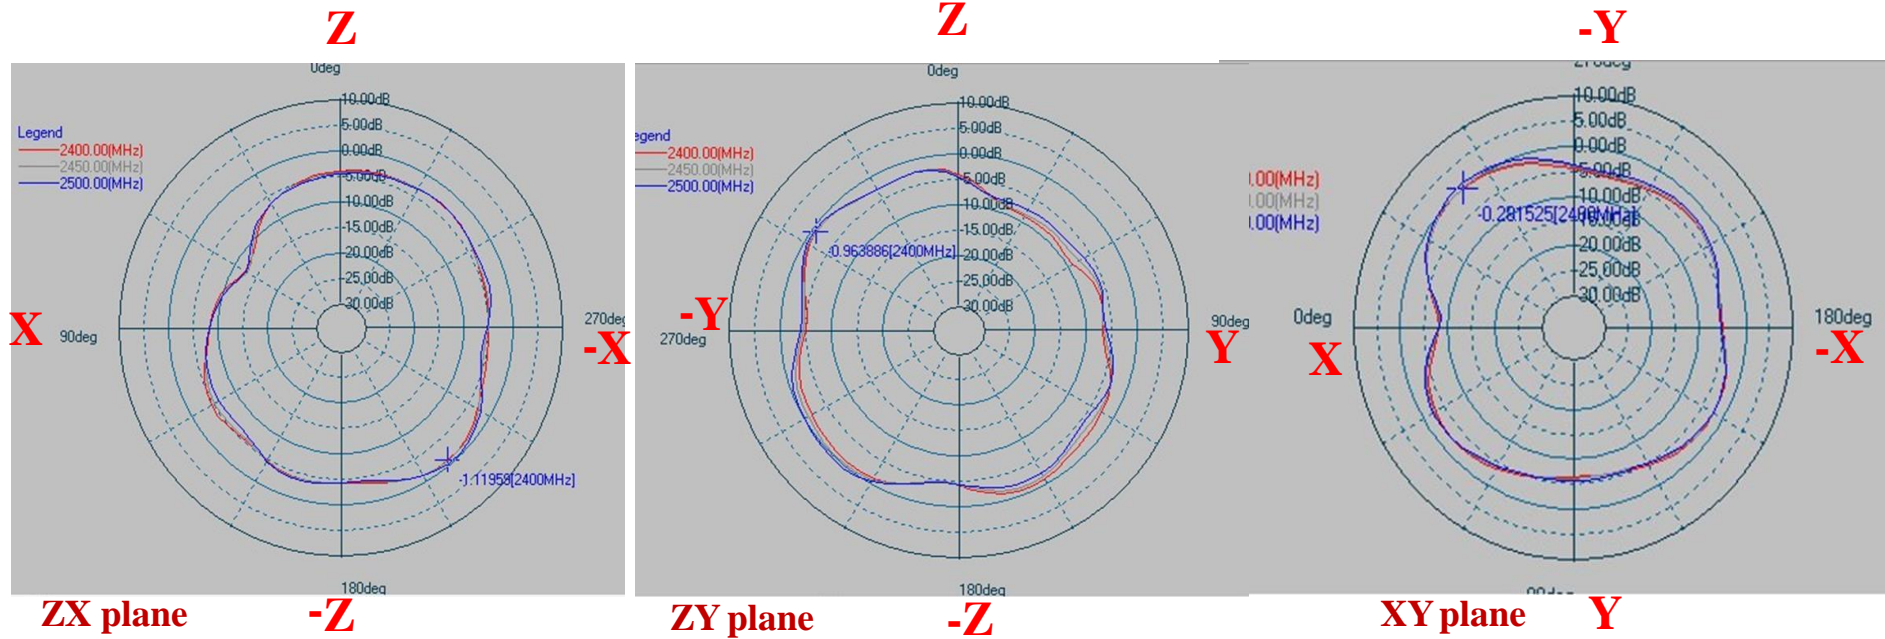

	ZX plane		ZY plane		XY plane	
Frequency [MHz]	Max Value [dB]	Average [dB]	Max Value [dB]	Average [dB]	Max Value [dB]	Average [dB]
2400	-1.12 dB	-4.83 dB	-0.96 dB	-3.68 dB	-0.28dB	-3.89dB
2450	-0.91 dB	-4.92 dB	-0.32 dB	-3.57 dB	-0.11 dB	-3.80 dB
2500	-0.51 dB	-4.94 dB	0.47 dB	-3.35 dB	0.47dB	-3.55 dB

3. Summary

1. The ANT maximum efficiency is 49.87%
2. The ANT maximum gain is 0.47dB

Manufacturer: Dongguan Tianyin Digital Technology Co., LTD
Address: Room 504, Building 2, Dongsheng Building, No. 168, Yongshanda Street, Fenggang Town, Dongguan City