

iKF-T3 功能按键说明

全新智能头戴式系列 兼容iOS和Android智能手机/平板等带蓝牙功能的电子产品

轻松配对

② 长按电源键 " ◎ " 2秒,听到出现提示音,则开机成功



③ 打开手机蓝牙功能,在配对页面上,搜索设备: iKF-T3,

4 将耳机从包装食里拿出来佩戴好



有连接记录的手机。 无需重复配对

【单击】"ANC"键 循环切换"抗风噪模式/降噪模式/通透模式

开机:【长按】电源键"◎"2秒,出现提示音 关机:【长按】电源键"◎"3秒,出现提示音

媒体操作

增加音量:【单击】"+"键,音量递增一个音阶, 最大音量时会有提示音 降低音量:【单击】"-"键,音量递减一个音阶, 最小音量时会有提示音 上 一 曲: 【长按】2秒 "-" 键 下 一 曲: 【长按】2秒 "+" 键 描 放: 【单击】电源键 " ● " 暂 停: 【单击】电源键 " ● " 唤醒语言助手: 【三击】"ANC"键

切换模式:【长按】"ANC"键,可按顺序切换模式,听到提示

首次配对连接成功后,耳机每次开机会自动连接上一部 通话操作

注: 如有必要,请关闭耳机后重复上述步骤重新连接 挂断电话: 【四击】电源键"◎"

入后,自动切换外置麦克风,通话声音更大,更清晰。 (机在有线使用的情况下

需通过手机iKF-APP进行开启或关闭

开启游戏模式: 【双击】"ANC"键,听到提示音则成功进入游戏模: 关闭游戏模式: 【双击】"ANC"键,听到提示音则成功退出游戏模:


来 电 状 态:来由时,同步提示手机铃声,如果手机不支持同步

Type-C接口,插入USB AUDIO线,蓝牙功能自动关闭,切换到有线播放

*USB AUDIO线支持耳机充电和电脑音频传输两个功能

开机 状态:指示灯白绿交替闪烁 关机 状态:指示白灯常亮2秒 连接上设备:均无提示灯 充电 状态:指示灯绿灯呼吸闪烁

关机状态下长按电源键 ″ ● ″ 5秒,强行进入配对状态。出现提示则出现配对成功,指示灯白绿交替闪烁



使用ANC主动降噪功能小提示

人声(高频分贝)方面的减轻会不明显哦。

产品充电注意事项

所有ANC主动降噪开启后主要消除减轻的是以低频为主的环境 噪音(如车行驶的声音、机器运转的声音、风声等等),对于

● 建议使用Type-C充电线接5V---2A手机充电器给产品进行充电

或 5V = 4.5A 等规格手机快充头对产品进行充电。

② 若没有对应充电参数的手机充电器,亦可使用其他参数如・9V=2A

③ 此处需注意手机充电头功率≤24W(如9V---2A 功率18W),超过此功率

4 不要使用车充、座充、USB墙充、USB排插、快充充电宝对产品进行

指示灯

及产品耗电异常快(续航变短)、甚至信号不稳定等情况



iKF APP配对连接操作

1、保证耳机处于开机状态目手机蓝牙开启,APP打开至运行页 2、 **1** APP页面弹出对应型号弹窗,连接即可 步骤一,打开"应用管理"找到iKF APP

3 自动搜索设备后,点击"连接"即可

② APP首页点击右上角 "●"添加设备

2、进入iKF APP连接操作 3、 APP页面弹出对应型号弹窗。连接即可 ② APP首页点击右上角 "●"添加设备

3 自动搜索设备后,点击"连接"即可。





置"讲行步骤操作

*iKF APP需要手机系统Android6.1和iOS12及以上系统版本

请扫描二维码下载安装

步骤四: 打开"省电策略",选中"无限制"

N同品牌的安卓手机操作步骤亦有不同

步骤六: 打开《秋城首连 步骤六: 开启的"后台弹出界面",选中"始终允许" 步骤七: 打开"定位",选中"始终允许"

②找到APP页面"我的-使用帮助"下获取不同品牌详细

的操作步骤 如若操作失败,请前往APP"我的-设置-APP后台运行设

步骤五·打开"权限管理"

关于APP连接的注意事项

- APP搜不到解决方法 确认王机是否开启蓝牙和GPS(完位)
- 3、打开APP,添加耳机,看到顶部允许定位权限提示,点击允许获取

- 号轮流匹配),弹窗就会有点延缓,时间不固定。

₩ ||| •

牙连接是分开的信号)。 耶就不全面弹窗了

等待弹窗弹出即可,如无法弹出弹窗,可以去手机设置里面,找到 iKF APP设置权限把蓝牙的选项打开即可。

硬件问题,请以实际耳机使用的为准。

③ < 89 KG-T3 **@88%**

弹窗慢或偶尔不弹窗

手机连接上蓝牙打开APP后不用去点击添加耳机。直接在APP主界面

← iKF-T3

206

- 5、打开APP。讲入搜索页面

3、弹窗速度慢和手机性能也有一定关系

、出现这种情况时,先对产品讲行重新开机。——般重新连接后可

- 确保播放音频的APP已调整设置为由蓝牙设备发出音频声音

7、未解决请扫描二维码重新安装软件

为,可联系客服帮助您进行售后流程并处理。

1、产品上有电源键、功能键、音量键,均为物理按键,需正确按下并回弹后,产品方可响应,若首次操作不成功,建议重新进 位置即可解决。 行一遍操作即可。 2、回顾耳机是否有机械损坏(倖坏、进水、挤压等),若无以上行为,可联系警服帮助您进行售后流程并处理。

1、包装内配置了一条USB AUDIO线,将耳机关机,并且使用 USB AUDIO线 插入连接耳机与PC电脑、笔记本,或者其他设备,

2、PC电脑或者笔记本等设备拥有蓝牙功能情况下,也可以使用蓝

产品规格

产品名称: iKF-T3 头戴式主动智能降噪耳机 蓝牙连接名: IKF-T3 蓝 牙 版 本: 5.3 输入电压: DC 5V 充电接口: Type-C 输入电流: 500mA 电池容量: 1000mAh

充电时间:约2小时 支持协议: HSP/HFP/A2DP/AVRCP 包装明细: 头戴式蓝牙耳机本体、USB AUDIO线、指导说明书、 精美包装盒

用心研发的好产品,深怕用户们误解它,iKF-T3 也不想被大家所怪罪] 使用头戴耳机时请留意以下信号等注意事项:

度情况等极端环境下使用,且每次正常使用后,建议用于

布、纸巾等工具擦干耳机上的汗水、雨水、污渍后,再进

行静置存放,此方式可有效延长耳机使用的寿命及极大程

iKF小K小姐姐温馨提醒:

优秀的音频产品。

产品日常维护

度上避免故障的出现。

售后服务与支持保修期

自用户签收日起12个月内

- 日常耳机与手机之间,确保两者距离不要超过10-20米,以及其 免费服务
- ② 日常使用过程中,若有偶尔断连问题属于正常现象,毕竟蓝牙属于 至产品保修期内,凡属产品本身质量引起的故障,请用户凭此 保修卡和购物凭证与经销商取得联系以享受免费维修。 无线信号传输,就跟wifi网络一样,偶尔的不稳定属于正常现象。 可能此时信号传输受到了部分环境的干扰,请稍等片刻或者换一下
- 免耳机包耳海绵部分没有完全封闭在耳朵,您可以根据实际使用的 舒适性,及时调整耳机的佩戴角度和包耳程度。
- 2. 因自行诉和追求损坏的;
 3. 因进水或跌落、挤压而造成的故障等机械损坏;
 4. 因不可抗力造成的故障或损坏;
 5. 已超三包有效期;
 6. 产品财带配件,包含:产品赠品、充电线。物理按键、 耳罩等;
 7. 不符合《IKF蓝牙耳机性能故障表》所罗列性能故障的情况;
 8. 因其他非常使用导致水产品及配件产生《IKF蓝牙耳机性能故障表》所罗列的性能故障。 4 头戴耳机将音量调至最大、出现部分的音频漏音情况实属正常、若

若您收到的 iKF-T3 有任何使用上的疑虑。

若恐取到的 IKF-13 有任何使用上的疑虑或题,请第一时间联系我们,我们将竭诚为理问题。愿通过我们的努力可以让您用上

iKF蓝牙耳机三包凭证 iKF蓝牙耳机售后服务承诺,严格依据《中国人民共和国消费者权益保护法》、《中华人民共和国产品质量法》实行售后三包服务,服务内容如下:在三包有效期内,你可依照本规定享受修理、更换、 请勿佩戴耳机洗澡/淋雨,或将产品泡入水中,以及异常温

若雲售后服务。 请联系iKF旗舰店客服

自你签收日起7日,iKF蓝牙耳机出现《iKF蓝牙耳机商品性能故障 的情况,经由iKF售后服务中心检测确定,依据你 洗择,免费办理退货和更换服务。

2.20年/李成/2015年/ 2.20年/ 2.20年/

蓝牙耳机性能故障表 蓝牙耳机 2.通话过程中,对方听不到声音

表》所列性能故障的情况,经由iKF售后服务中心检测确定,依据(

的选择,免费进行维修。

提示
1. 使用产品前请仔细阅读本使用说明书并请妥善保管。
2. 首次使用、请先将本产品充满电。
3. 若产品需超过1个月不用,请对其充满电后,再妥善静置存放,顺间键议每一个月都对其充满电,可极大有效延长产品的使用寿命否则产品内的电池会因自身的特性持续性的自放电,过度放电会导致产品彻底损坏,无法继续使用,亦不属于质保范围。
4. 必须选择证别厂家生产经过国家CCC认证的东电器对产品进行充电。
5. 若手机无法搜索蓝牙耳机。请确认蓝牙耳机是否处于开机等待配的状态。若长时间未成功配对或者链接,蓝牙耳机配对功能将关(关机),需重开机蓝牙耳机并处于配对状态中,若手机程序出错,请重开机手机,若蓝牙耳机程序出错,请重开机手机,若蓝牙耳机程序出错,请重开机车机

- ★方
 请勿以任何理由拆除或维修改装耳机,否则可能会导致产品起火、电子击穿甚至彻底损坏本产品,而该行为损坏产品与我司无关,后果将由买家自行承担。
 请勿将设备置于温度0°C以下或45°C以上的环境中。
 请遗免靠近儿直或动物的眼睛使用设备指示灯。
 请勿存雷暴天气下使用该设备,雷暴可导致设备工作不正常,并操物的操性的合金。
- 增加触电的危险。 i、请勿用油及其他挥发性化学液体擦拭本产品表面,但可采用酒精 日常清理保养产品。 6、请勿将设备接触液体弄湿。



专注有趣的音乐产品

iKF-T3 Wireless Headphones

USER MANUAL

iKF - T3 头戴式主动智能降噪耳机

诠释音乐新体验 闯入静谧新世界

Thank you for using the iKF-T3. We hope you will enjoy it!



Jser manual*1

. Only use attachments/accessories specified by the

Do not use this apparatus near water
 Clean only with a dry cloth.

Official package including

harging/Audio cable(TYPE- C USB)*1 / /》// ios

Before use Important Safety Instructions

. Follow all instructions.

been spilled or objects have fallen into the apparatus, the operate normally, or has been dropped.

- Do NOT use the headphones at a high volume for any extended period.
- headphones on your ears, then turn the volume up gradually until you reach a comfortable listening level.

headphones.

- 8. Refer all servicing to gualified personnel, Servicing is
- WARNINGS/CAUTIONS To avoid hearing damage, use your headphones at a comfortable, moderate volume level.
- Do NOT use your headphones while driving for phone alls or any other purpose.

 Do NOT use the headphones with noise canceling on at my time the inability to hear surrounding sounds may
- railroad, etc., and follow applicable laws regarding can hear surrounding sounds, including alarms and warning
- Turn the volume down on your device before placing the
- bicycle or walking in or near traffic, a construction site or headphone use.

 - Remove the headphones, or use the headphones with noise cancelling off and adjust your volume, to ensure you

- Re aware of how sounds that you rely on as reminders

or warnings may vary in character when using the

- ntains small parts which may be a choking hazard. Not suitable for children under age 3. his product contains magnetic material. Consult your
- To reduce the risk of fire or electrical shock, do NOT lo not place objects filled with liquids, such as vases, on
- oply that meets local regulatory requirements .g., UL, CSA, VDE, CCC). If the hattery leaks, do not allow the liquid to come in tact with the skin or eyes. If contact is made, seek nedical advice.

Do NOT wear the headphones while charging.


Do NOT use the headphones if they emit any loud

- Do NOT use mobile phone adapters to connect eadphones to airplane seat jacks, as this could result in
- nedical device.
- Do NOT make unauthorized alterations to this product. Use this product only with an agency-approved power

- ontact iKF customer service. Remove headphones immediately if you experience :
- Do NOT use the headphones as aviation communication
- Do NOT expose this product to dripping or splashing, and

- as possible.


The headphones do not play audio while charging

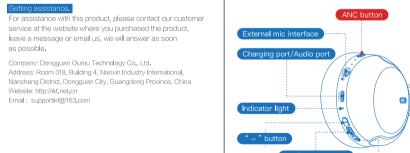


Warnings

Website: http://ikf.net.cn

When charging the headset to avoid damage to the battery The power of the charging head should not exceed 24W. be situations where charging cannot be performed or the



INSTRUCTION



SPECIFICATIONS

/lodel: iKF-T3 Power input: DC 5V Input parameters: 500mA
Charging interface: TYPE- C USB Battery capacity: 1000mAh Charging time: about 2 hours Supporting agreement: HSP/HFP/A2

Charging: The power indicator light is solid red




For the first time use, please fully charge the product

CHARGING



Full power: The red light of the power indicator is off







HOW TO CONNECT . Open the Bluetooth interface of the mobile phone. leadset will automatically connect to the last mobile phone

Power on: Long press the power button 2 seconds and ear the prompt that it is turned off:

LED indicator

Power on: Signal light flashing white and green Power off: The signal light is white for 2 seconds Incoming call status: Green light is on every 10 seconds (When a call comes in, it will prompt the ringtone of the mobil synchronization ringtone, prompt tone "Didididididi")

POWER ON/OFF

Long press the power button 2S and hear the prompt earch for "iKF-T3", click to connect;

After the first pairing and connection is successful, the

ere is no need to repeat pairing.

IKF APP CONNECTION

2. APP page pop- up window pops up the model, just connect ②On the home page of the APP, click " 🕾 " in the upper right 1. Need to manually connect the headset on the iOS device

3. APP page pop- up window pops up the model, just connect
On the home page of the APP, click " e " in the upper right 3 After automatically searching for the device, dick "Connect"

Bluetooth page

2. Open the iKF APP page

The iKF app requires a minimum operating system version mobile device.

Listen to music with headset

After automatically searching for the device, click "Connect".

- Noise reduction mode
- of Android 6.1 for Android devices and iOS 12 for iPhones and iPads. To use the app, ensure that your Android device has Android 6.1 or a higher version, and your iOS device ha compatibility and proper functioning of the iKF app on your Switching modes: [Long press] "ANC" button to switch modes in

BUTTON CONTROLS

*When the volume is adjusted to the maximum and r

Next Track: [Long press] 2S the "+" button: Voice assistant: [Triple-tap] the ANC button;

Answer incoming call: [Double-tap] the power butto Reject call: [Long press] 2S the power button: End call: [Quadruple tap] the power button:

Call with headset

(₹) ≠ (₹)

The headphones turn on HiFi mode by default.

ANC (Active Noise Cancellation) Mode/Transparent Mode"

Movie mode

alternately in white and green.

WIRED CONNECTION

*In wired mode

EXTERNAL MICROPHONE

Insert the configured microphone into the microphone is

Turn off: Double-tap the "ANC" button, and you will successfully obstacles that interfere with the signal:

Turn on or off movie mode through iKF APP. *Movie mode and game mode cannot be turned on at the location to resolve;

are related to the way of wearing the headphones and the volume of the headphones. The audio cable Type- C port is inserted into the headphon the USB port is connected to the device you want to connected to the device.

the Bluetooth function is automatically turned off.

TIPS

- within a valid connection range and there are not too man occasionally. Just like WiFi, occasionally the connection i
- connected to other devices; 4. Please fully charge the Headphone once a month, if the
 - 6. Please use a standard- compliant charging head to charge the headset

then store it.

- transmission. Please wait a moment or change the 3. When the headset cannot be connected to the device please check whether the headset has power or is
- wrapping of the headphones in time according to the actu comfort of use. Please close the ear/head foam part of the

Do not wear the product for bathing, or use it in the

rain, and do not soak the product in water. After each

normal use, it is recommended to dry the sweat or stains.

on the headphone with a dry cloth, paper towel, etc., and

Headphones may be damaged.

LIMITED WARRANTY

Warranty period: 1 year from the date of product receipt

f the product itself, please contact us with the warranty card

nd shopping records to receive a return authorization / free

Fault Table

The following conditions will not provide free repair .Unauthorized maintenance, misuse, collision, neglect abuse, accident, alteration, or damage or alteration of the nnearance of the product:

4.Failures caused by accidents such as water ingress or

3 Damage caused by self- disassembly:

falling, squeezing, etc;

5.Normal wear and dirt caused by use, such as scratches damage caused by contact with chemical reagents,

Outer packaging and accessories, gifts, services other an the products promised by the sales staff, . Improper storage: If the product is exposed to abnormal umidity and temperature for a long time, the

CC Caution:
hit countries with part 15 of the FCC Rules. Operation is subject to the
collowing two conditions: (1) This device may not cause harmful interference,
and (2) this device must accept any interference received, including
the condition of the contribution of the contribut

Focus on interesting musical products

Made in China



8. Failure or damage caused by force majeure;

con, can be determined by turning the equipment off and on, the user is aged to try to correct the interference by one or more of the following asures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different on that to which the receiver is connected. rom that to which the receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help,
he device has been evaluated to meet general RF exposure requirement. The
levice can be used in portable exposure condition without restriction.