


# Antenna Test Report

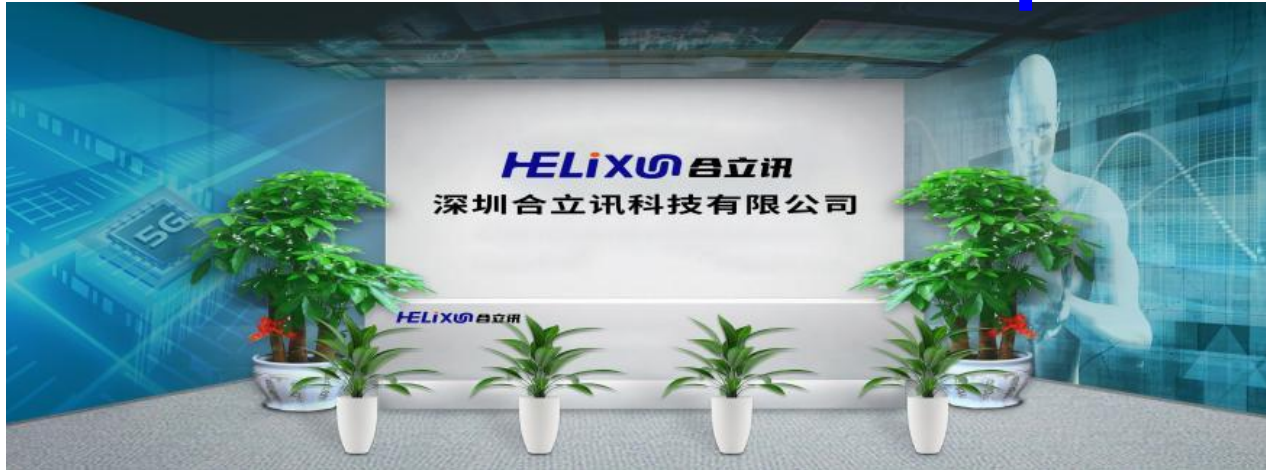

Customer	Yinbei qi (Shenzhen) Technology Co., Ltd.
Project	YINPAGE Free 1
address	1609-1, Building A, Bantian International Center No. 5 Huancheng South Road, Ma'an Tang Community Longgang District, Shenzhen
Prepared by	15993920520
Checked by	17279710721
Date :	2023. 09. 06

## ***Purpose***


This report is to measure the performance of antenna for YINPAGE Free 1The antenna operating frequency at 2400MHz0-2500MHz 。  
All test data are showed as below.

## ***Content***


1. Product Overview & Dimension
2. Test system
3. Test Result
4. Test Result
  - 4.1 S11 Parameter-VSWR**
  - 4.2 Gain & Efficiency**
  - 4.3 Test coordinate**
  - 4.4 2D Pattern

# 1. Test System

Sequence Number	Test Item	equipment
S parameter	VSWR	Agilent 5071C & Agilent 5071B
OTA Test	TRP&TIS	Agilent 8960 & CMW500 STIMO
Gain & Efficiency	Gain & Efficiency	SATIMO Agilent 5071C

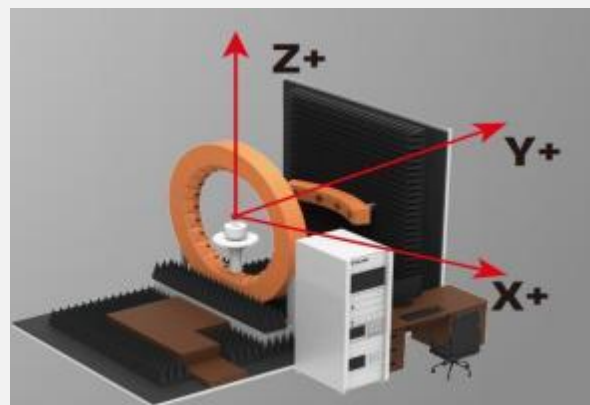

## 2. Product Overview & Dimension

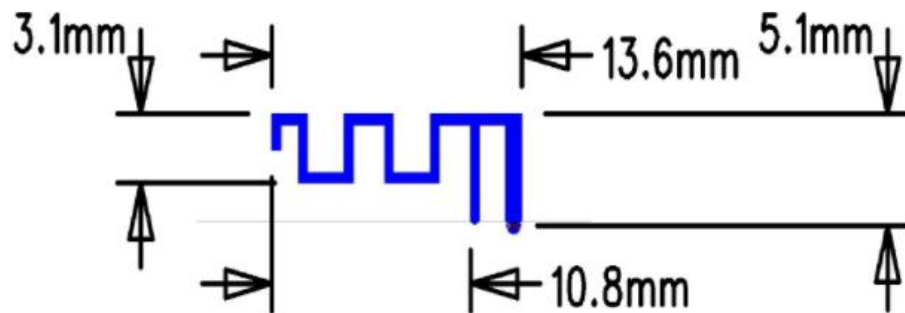

## 4. Test Result

### 4.1 S11 Parameter-VSWR



Frequency (MHz)	2400	2450	2480	2500
VSWR	1.47	1.23	1.24	1.31

## 4. Test Result

### 4.1 S11 Parameter-Log Mag


Tr1 S11 Log Mag 10.00dB/ Ref 0.000dB [F1]



Frequency (MHz)	2400	2450	2480	2500
Log Mag	-14.39	-19.59	-19.12	-17.23

## 4. Test Result

### 4.1 S11 Parameter-Smith

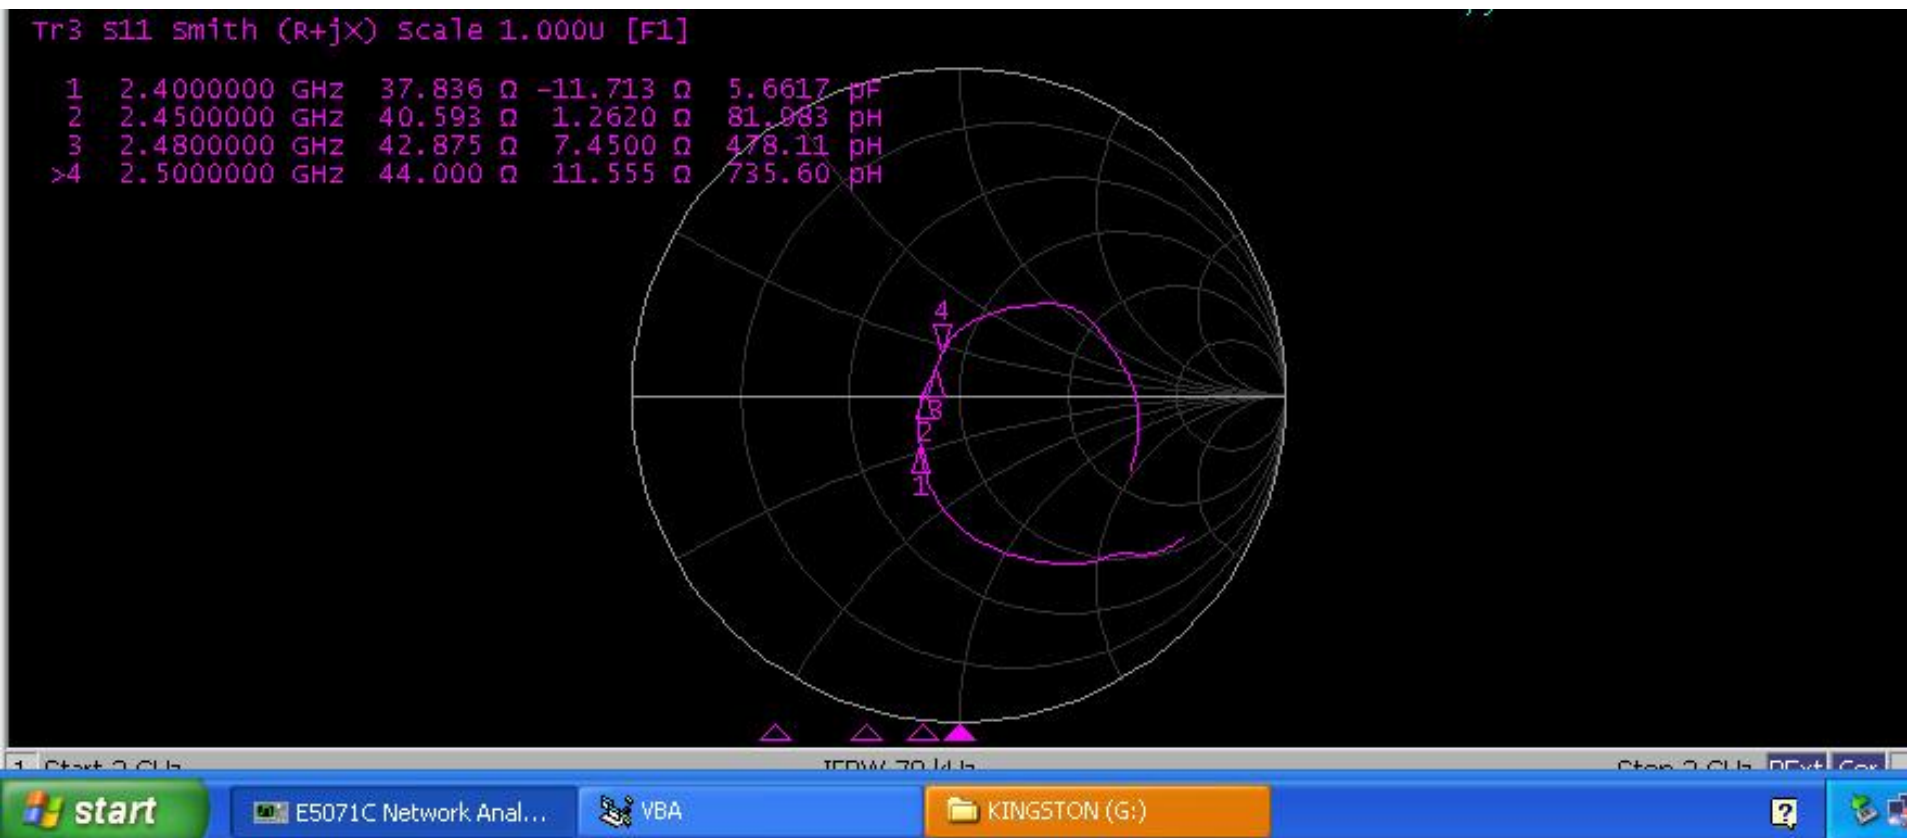

Frequency (MHz)	2400	2450	2480	2500
Smith(Ω)	37.83	40.59	52.87	44.00

# 4. Test Result



## 4.2 Gain & Efficiency—**ANT**

Frequency (MHz)	Efficiency (%)	Peak GAIN (dBi)
2400	28.38%	-0.68
2410	29.31%	-0.46
2420	30.9%	-0.37
2430	31.84%	-0.18
2440	33.96%	-0.19
2450	36.56%	0.01
2460	38.55%	0.29
2470	38.73%	0.66
2480	40.46%	1.00





# 4. Test Result

## 4.3 2D Pattern — BT ANT

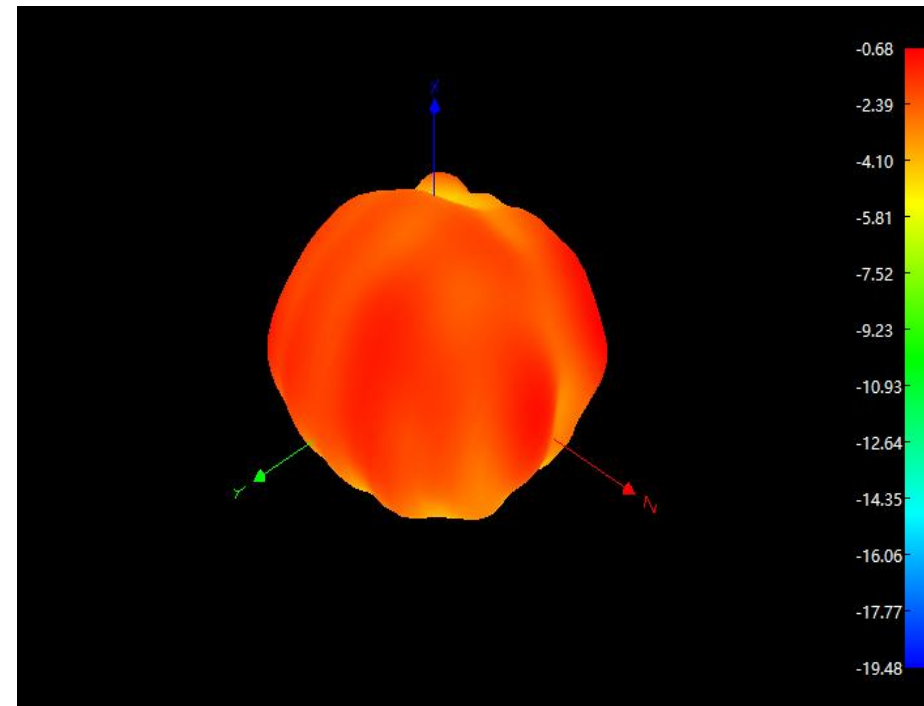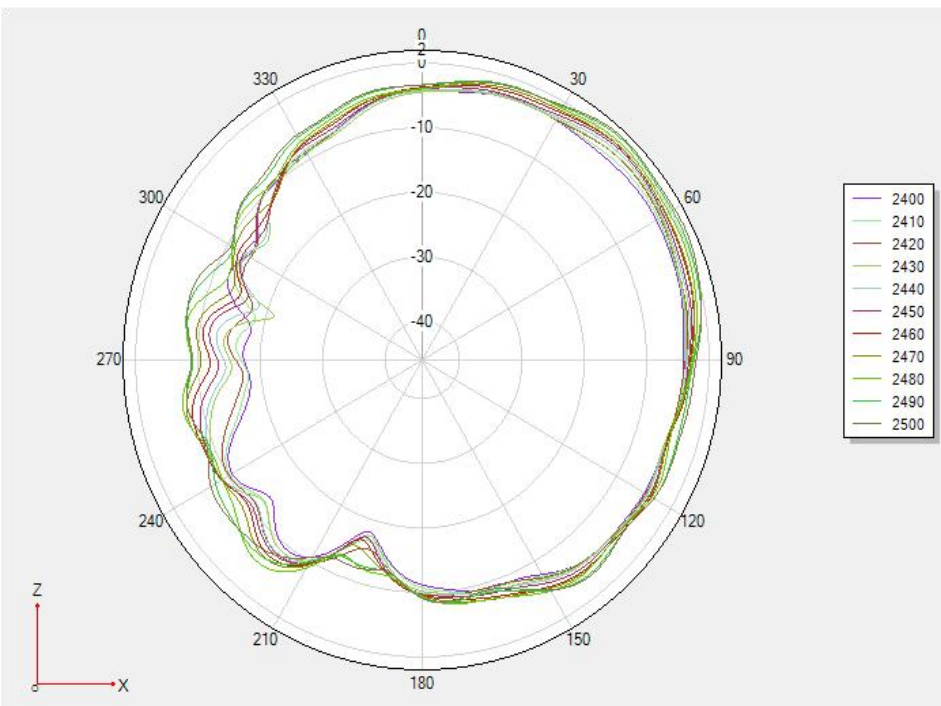



# 4. Test Result

## 4.3 2D Pattern — BT ANT

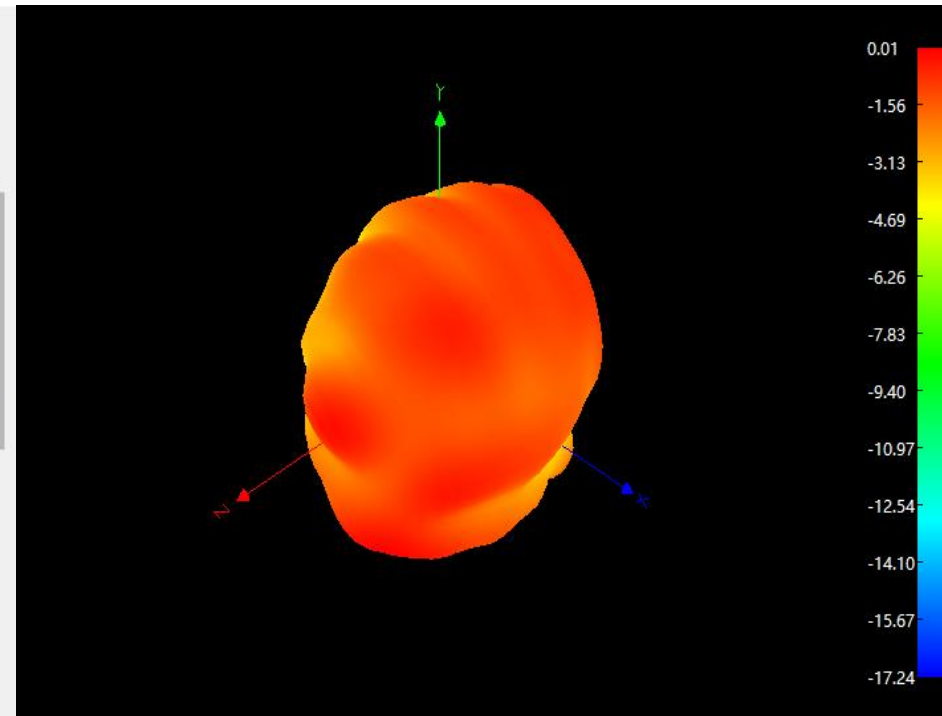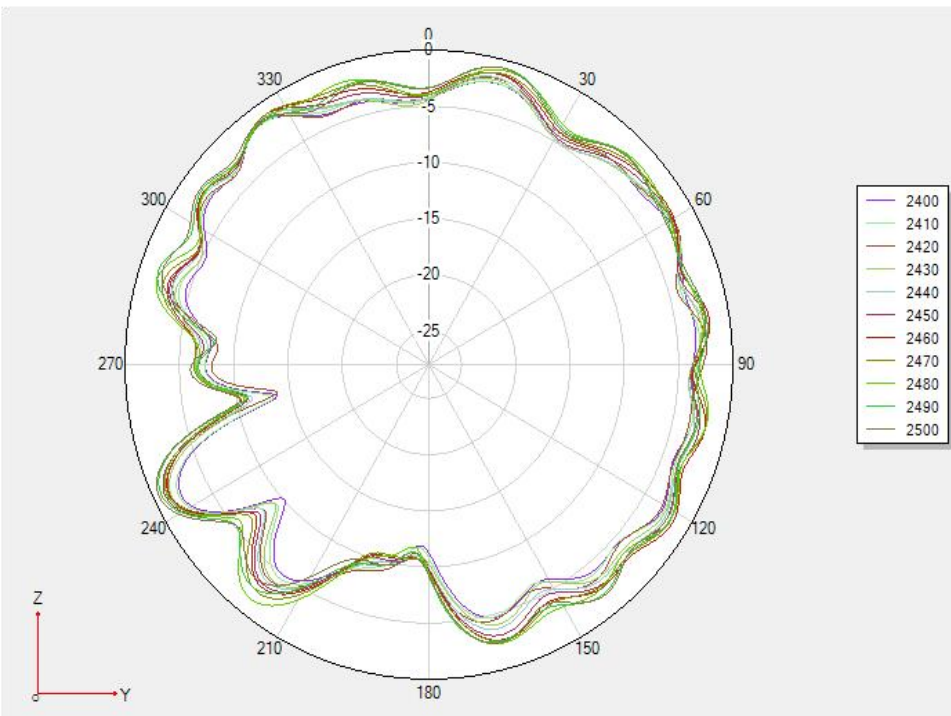

# 4. Test Result







## 4.3 2D Pattern — BT ANT

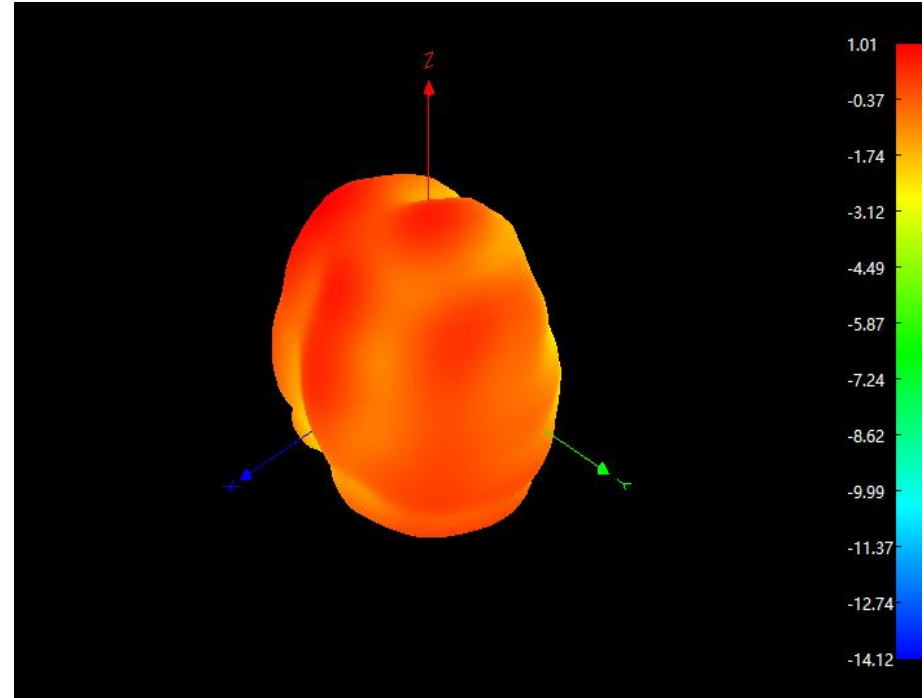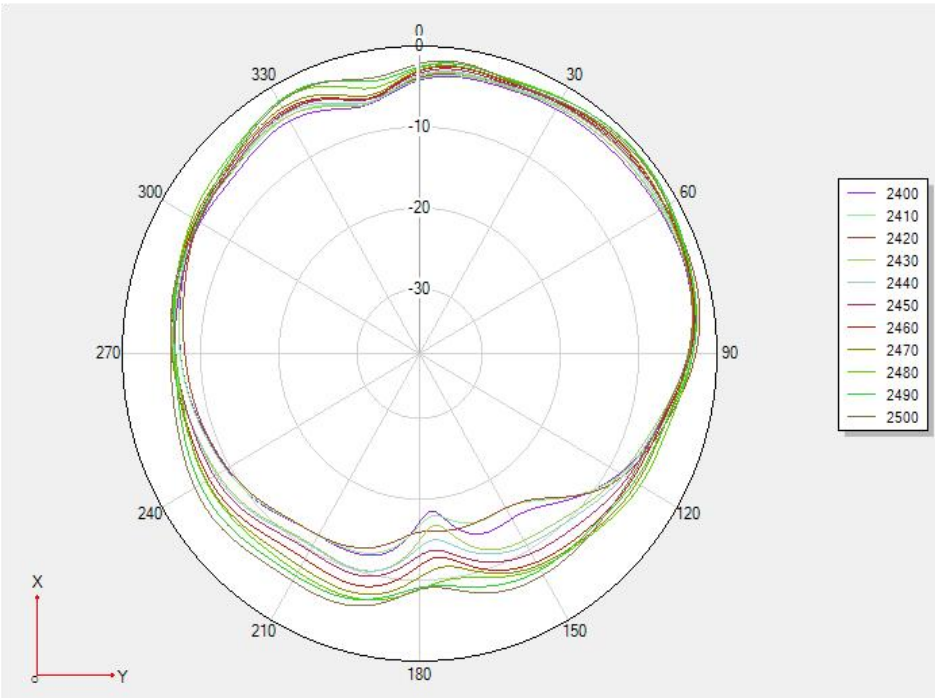







## 3.OTA Data

Test Equipment:	R&S CMW500		
Test Condition:	3D chamber		
Band	Channel	TRP(dBm)	TIS(dBm)
BT	0	1.69	-84.45
	39	2.91	-84.56
	78	2.81	-86.73

## 3. Test Result

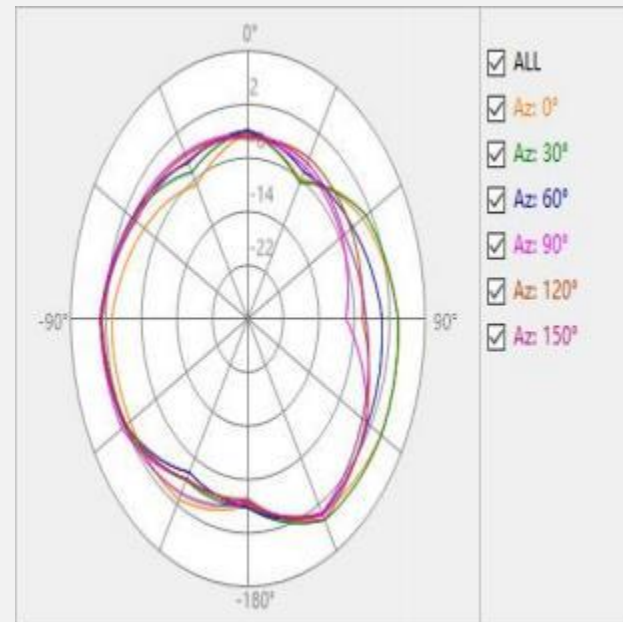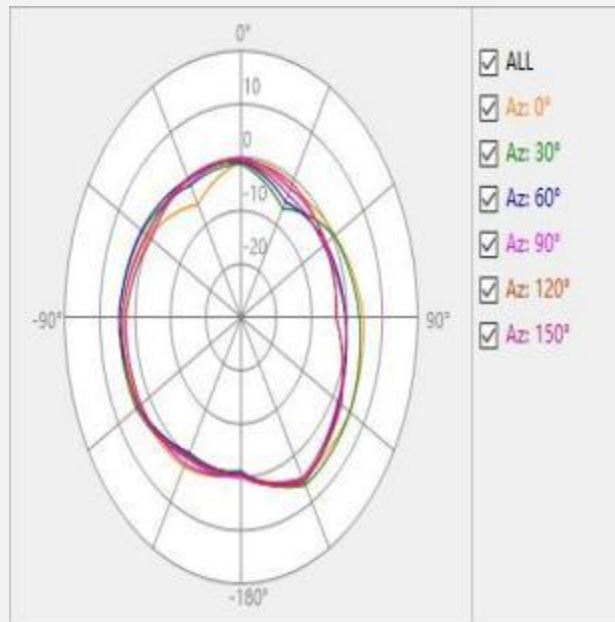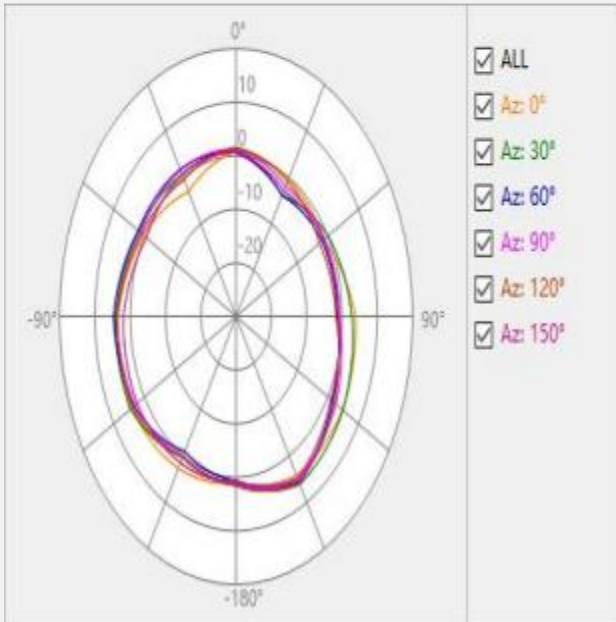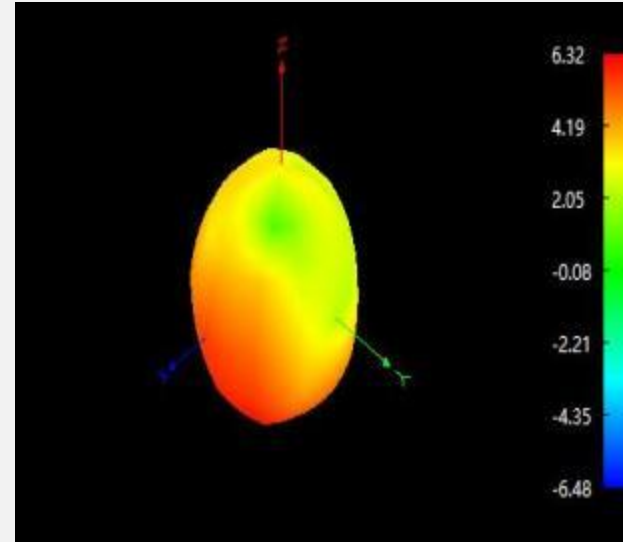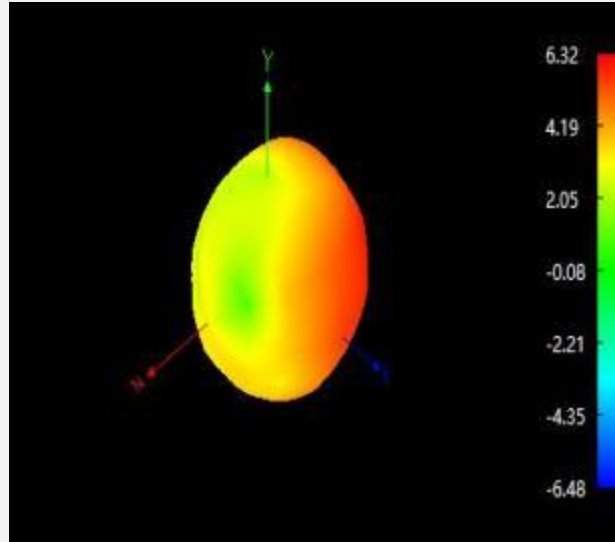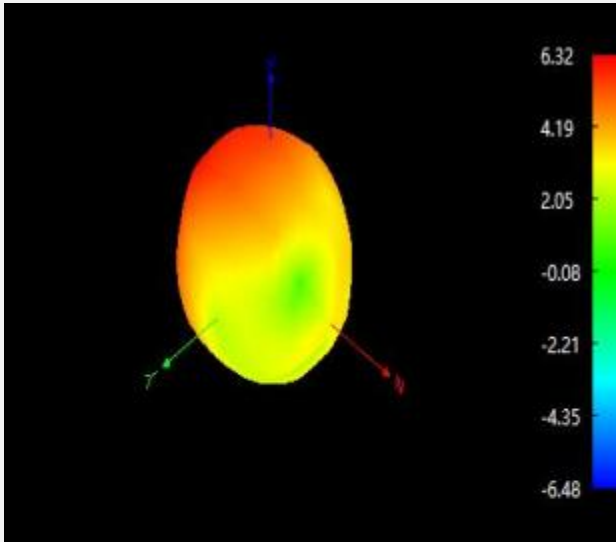

## 3. Test Result

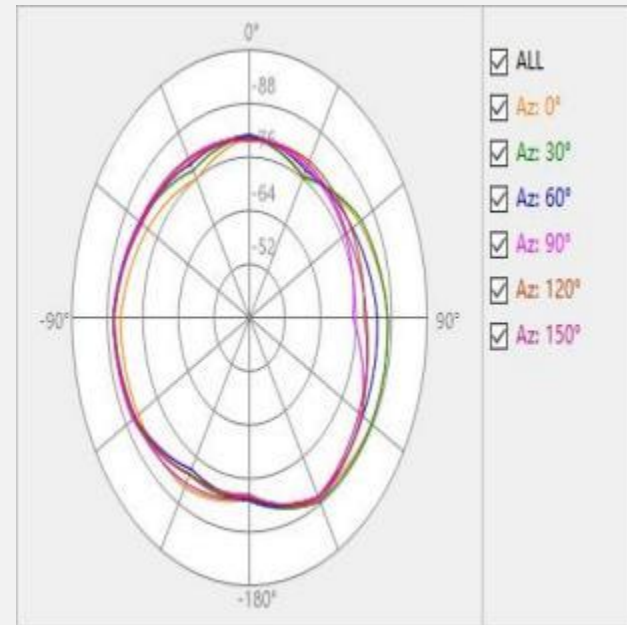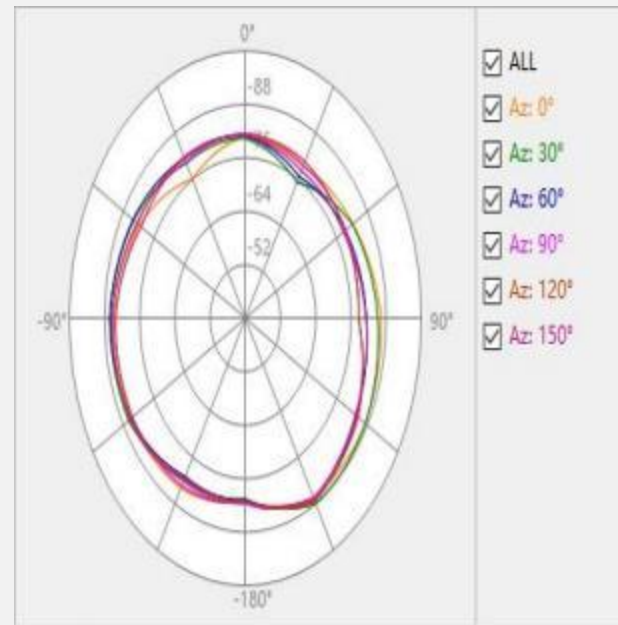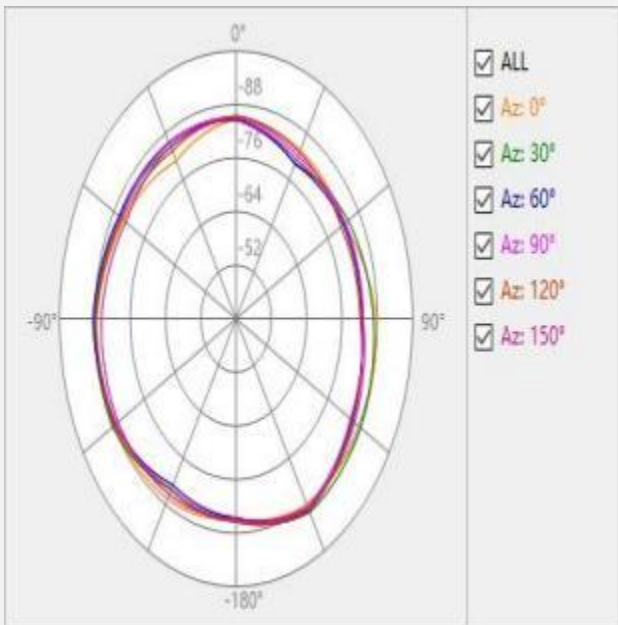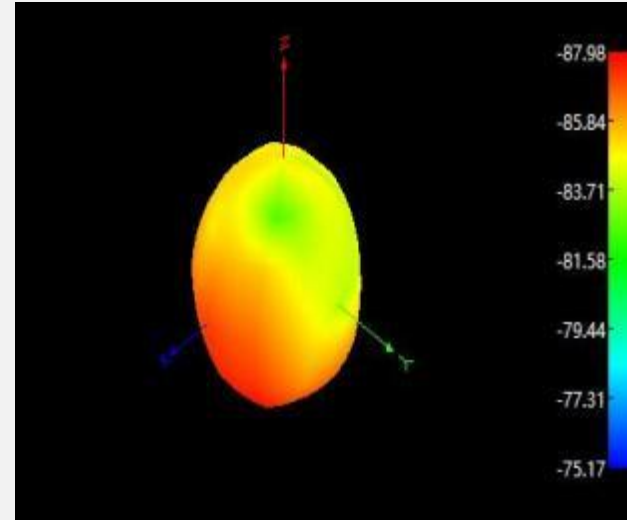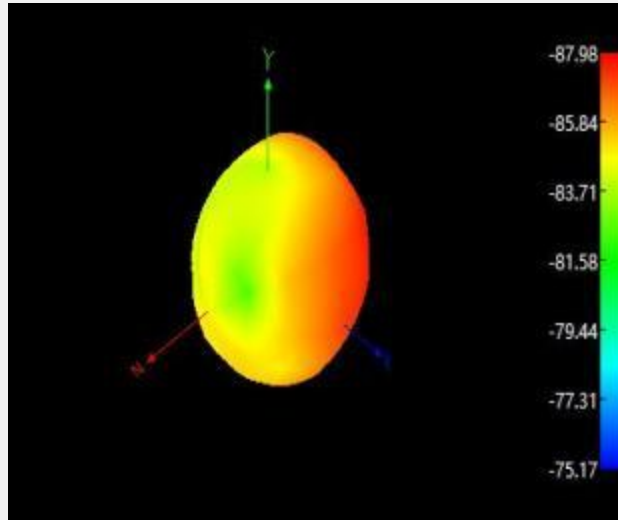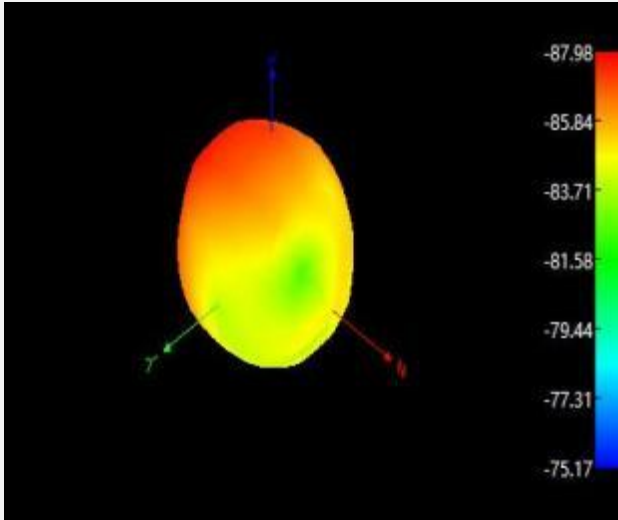

*Thank you!*

***Shenzhen Helixun Technology Co., Ltd.  
Room 1905, Building 2, Jiufang Square, Tiezi Road, Gongle  
Community, Xixiang Street, Bao'an District, Shenzhen, China***