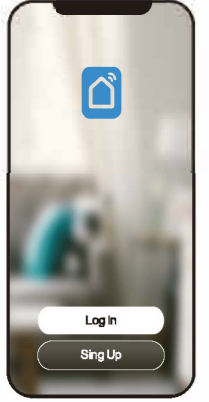
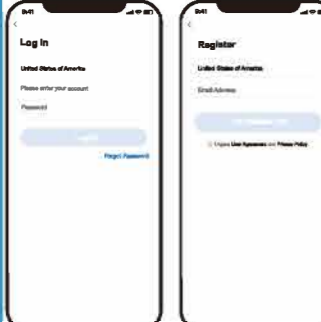



# 4.5 C M x 8 C M 八折页



**WI-FI BULB** User Manual

01

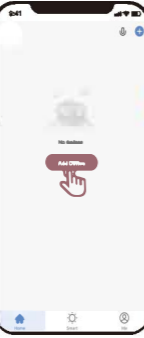

**How to operate:** 1. Download "Smart Life" APP (two ways to get the APP). By scan barcode B. Search "Smart Life" by Google play (Android System); Search "Smart Life" by APP store (Apple-iOS).

02

**Choice 1: Add Manually (Please turn on your phone's Wi-Fi Network)**

**1.1 Add Device:** Click "+" to add a device. (Please turn on your phone Wi-Fi network)

**1.2 Go to add the Smart Bulb (Add Manually):** Click "Lighting" button to choose Light Source (Wi-Fi) or Light Source (BLE+Wi-Fi)







03

**1.3 Add the network:** Select 2.4GHz Wifi network and enter password. If network is 5GHz, please switch to 2.4GHz network; Reset the device via below 2 modes:

**EZ Mode** Manually add lighting equipment and select WiFi connection; Power on the bulb with power switch, and repeatedly turn on-off - on - on the switch to activate the bulb into rapid blinking status. Wait till the bulb rapidly blinks (about 0.5 second per blink). Click the confirmation button.



**AP Mode** If the bulb can't be connected via EZ mode, try to click "AP mode" on the right corner of the top. Power on the bulb with power switch. When the bulb is rapidly blinking, then turn on - off - on - off - on the switch to ensure that light is slowly flashing. Click the confirmation button.

04

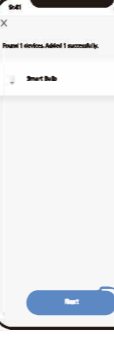

**1.4 Add Device:** When adding device and scanning devices, please ensure the Wi-Fi is good (ensure the wifi is 2.4GHz network). If the device connection is over time, please click "cancel" button, ensure that the network is 2.4GHz Wi-Fi network again, switch AP mode, and then restart the connection.

**1.5 Add Device:** Register this device on Cloud and initialize the device, then connect successfully.

05

**1.6 Add Device:** Once adding the device successfully, you can click the "Smart Bulb" to rename the device, and click the "Done" button to adjust the Smart Bulb.



06

**Choice 2: Auto Identification (Please turn on your phone's Bluetooth and Wi-Fi)**

**2.1 Add Device:** Click "+" to add a device.

**2.2 Go to Add the Smart Bulb (Auto Scan)**



**2.2.1** Recognize the smart bulb automatically, then click "Go to add" button to connect. (Bluetooth can auto scan the device)

07

**2.3** Click "+" on the right side of "Bluetooth Device" to add Wi-Fi;

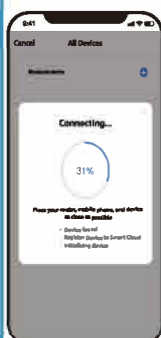

**2.4** Connect the smart bulb by 2.4GHz Wi-Fi: Input Wi-Fi Name and Password.

08

**2.5** When connecting the device, please place your router, mobile phone and device as close as possible;

**2.6** The device is connected successfully, you can rename the device. Click the "Done" button to adjust the smart bulb.






09

**Adjust the Smart Bulb:**

**Adjust the smart bulb color temperature:** Cold light and warm light;



**Adjust the Light color (There are 16 millions colors to change)** Brightness adjustment and saturation;

10

**Multiple scene modes:** Night, Read, Working, Leisure, Soft, Colorful, Dazzling and Gorgeous. Click the "Edit" button to edit Scene Name, Scene Color, Color Flash Mode, Color Flash Mode and Color Flash Speed then click "submit";

**Voice recognition function:** Change colors according to the rhythm of the music.






11

**Create a Light Group**

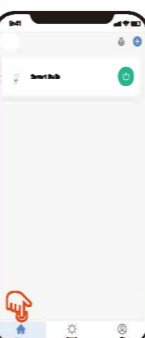

**1. Click "Create a home"**

**2. Edit the name, set the home location, and select the rooms. Click the phone right corner "Save"**

12


**3. Return to the Main Interface "Home", click the phone left corner to manage.**


13

**Enable Smart Life skill in Alexa APP**

Choose "Skills" in the options bar, and the search "Smart Life" in input box



Select Smart Life in the search results, and then click "Enable Skill"



Then input the user name and password that you had previously registered. Only support the account in the United States.

14

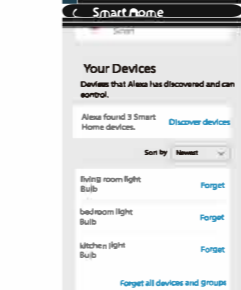
**Control Smart Bulb by Voice**

After the above operation is successful, you can control the bulb via Echo.

**Discover devices**

Firstly, you need to say to Echo: Echo (or Alexa), discover my devices. Echo will start to find the devices which is added in Smart Life APP, which will take about 20 s then it will tell you the result.



You can also click "Discover devices" in Alexa APP, then it will show the devices that found successfully.



15

**Control devices by voice**

**Attention:** The name of the device must be consistent with the addition of Smart Life App. You can also group the bulbs and give instructions to control them together.

**Attention:** Echo is one of the wake-up names, which can be any of these three names (Setting): Alexa, Echo, Amazon.

**Support Skill List**

You can control devices by instructions like these.

- ◆ Alexa (or Echo), turn on [bedroom light]
- ◆ Alexa (or Echo), turn off [bedroom light]
- ◆ Alexa (or Echo), set [bedroom light] to 50 percent
- ◆ Alexa (or Echo), increase [bedroom light] to 50 percent
- ◆ Alexa (or Echo), decrease [bedroom light] to 50 percent
- ◆ Alexa (or Echo), set [smart heater] to 34
- ◆ Alexa (or Echo), raise [smart heater] by 4
- ◆ Alexa (or Echo), lower [smart heater] by 2

16

## **FCC Warning**

### **15.19 Labeling requirements.**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

### **15.21 Information to user.**

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

### **15.105 Information to the user.**

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

### **FCC RF Radiation Exposure Statement:**

- 1.This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
- 2.This equipment complies with RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body