


# Antenna information

1. Manufacturer: Shenzhen Jingyu Circuit Co., LTD

Address: 806 Shajing Building, Shajing Street, Dongtang Community,



Shajing Street, Baoan District, Shenzhen

2. Antenna size diagram (Unit: mm)

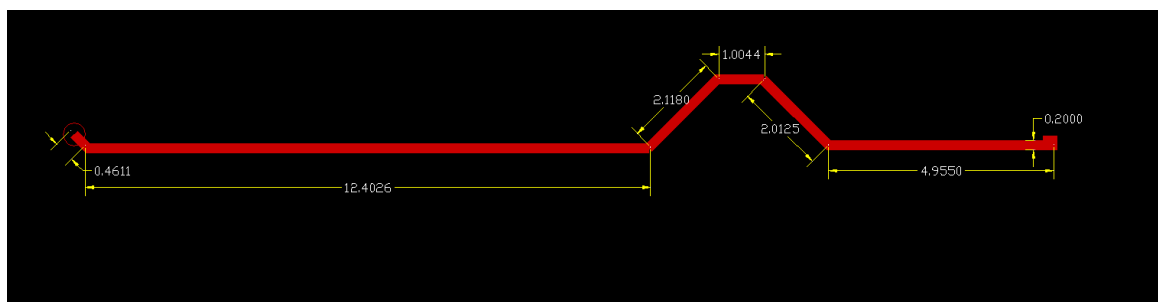


3. Summary

Freq(MHz)	Gain(dBi)	Efficiency(dB)	Efficiency(%)
2400	1.86	-4.285909582	37.274261
2410	1.88	-4.25435451	37.54607549
2420	1.85	-4.278363816	37.33908045
2430	1.89	-4.246522738	37.61384462
2440	1.85	-4.246884933	37.61070781
2450	1.82	-4.263833692	37.46421445
2460	1.80	-4.276498887	37.35511789
2470	1.69	-4.368856386	36.56910752
2480	1.59	-4.436611859	36.00301025
2490	1.42	-4.552531686	35.05474654
2500	1.21	-4.703247118	33.8590905

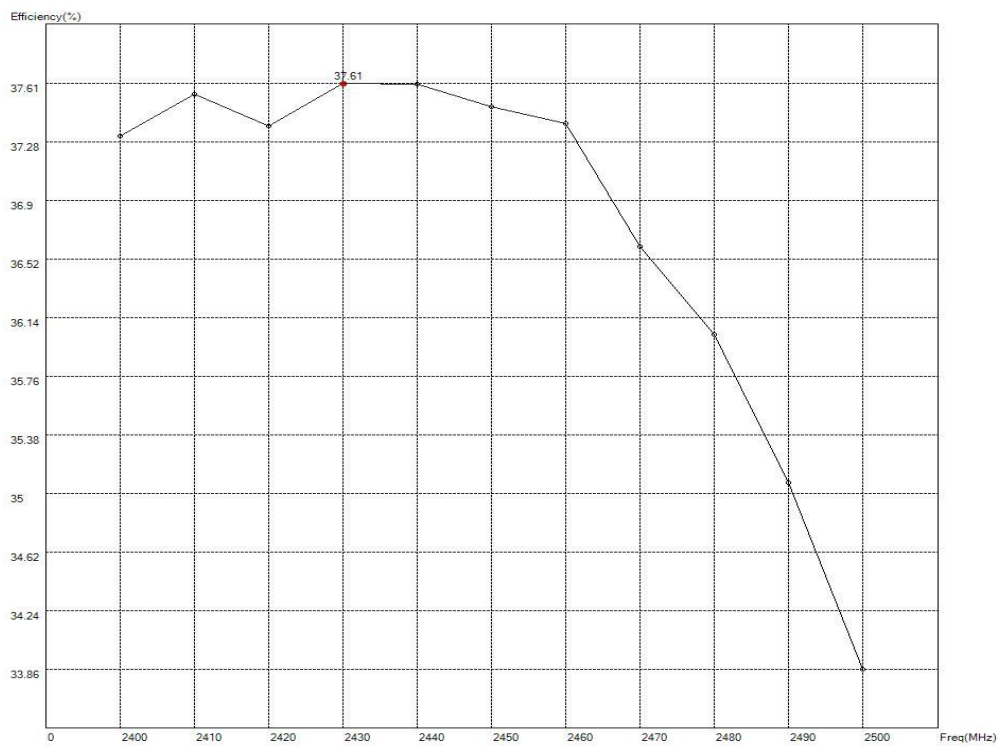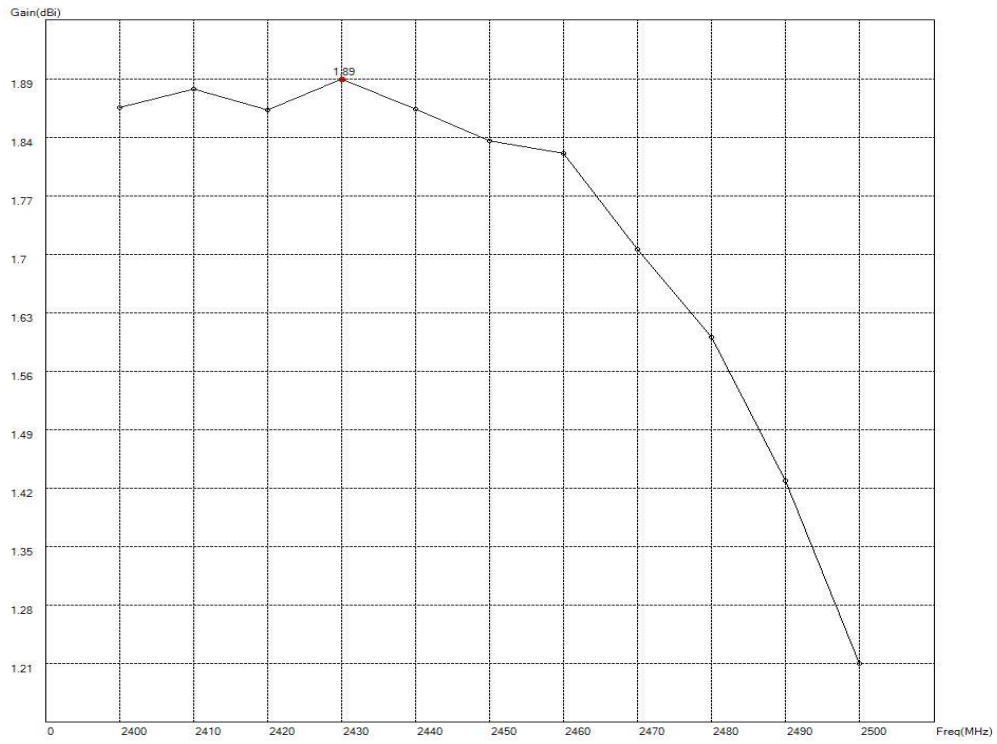

## 4. 2D

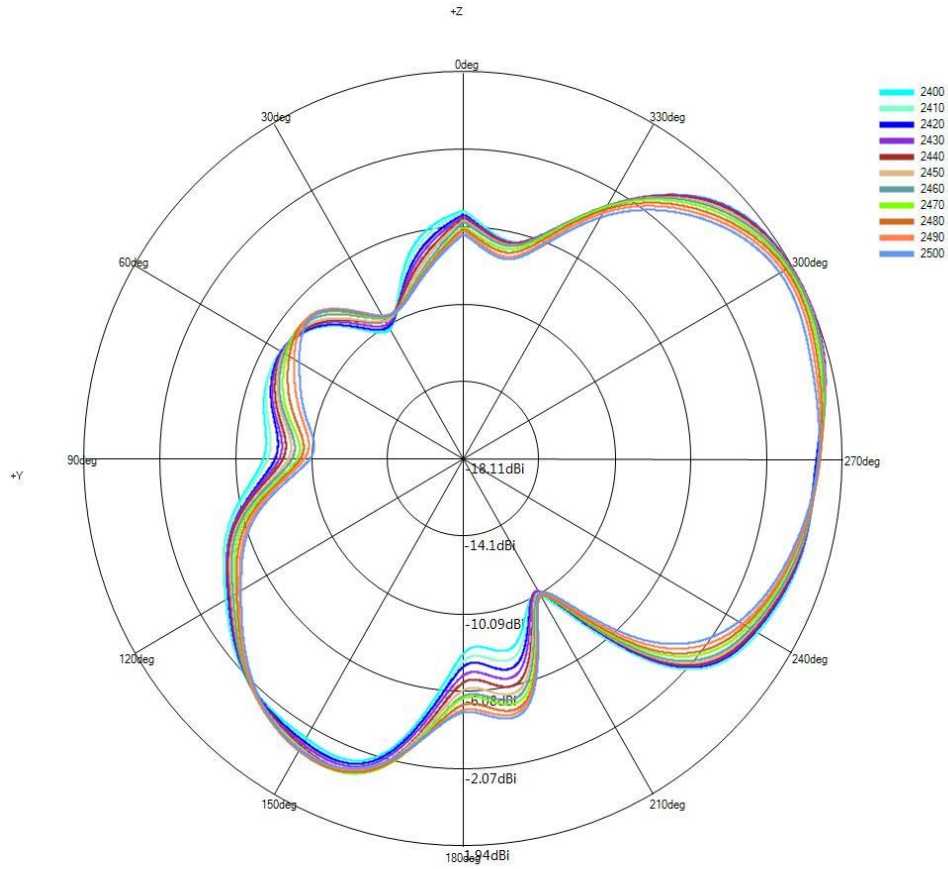

Freq (MHz)	Max.	Ave.	Min.
2400	1.855149	-2.61619	-10.3126
2410	1.876837	-2.61653	-10.1856
2420	1.852002	-2.66688	-10.1812
2430	1.888134	-2.6478	-10.2248
2440	1.852798	-2.6763	-10.1084
2450	1.816046	-2.71303	-10.1159
2460	1.80207	-2.74297	-10.0232
2470	1.690802	-2.85082	-9.92372
2480	1.588711	-2.93392	-9.93218
2490	1.421936	-3.05349	-9.97984
2500	1.210165	-3.20618	-10.06