

WEOFLY Live User Manual

What's in the box
Headphone
Quick Start Guide
USB Type-C Charging Cable
Type-C to 3.5mm AUX Audio Cable
2.4G Transmitter



Things to keep in mind with Wireless Headphone

Wireless Headphone should not be used in extreme temperatures.
Before using the headphone for the first time, make sure to charge them using a 5V, 24W or lower USB-C charger.
The Max. Input Watt for AUX is 50 mW.

Pairing Wireless Headphone with your phone


1. Turn on the headphone by pressing MFB for 2 seconds. You'll then hear a "Power-on" notification and the LED will flash blue and red alternately.
2. On your phone, go to Settings, turn Bluetooth on, and then pair with "Weofly Live". Check your phone user guide to find out how to access Bluetooth settings.
3. Once paired, the headphone will automatically connect to your phone whenever you turn on the headphone.

EN

Performing a factory reset

When the headphone are on and not pairing with your phone, press MFB quickly for 5 times to complete the factory reset. It can be connected and used normally when be powered on.

Components

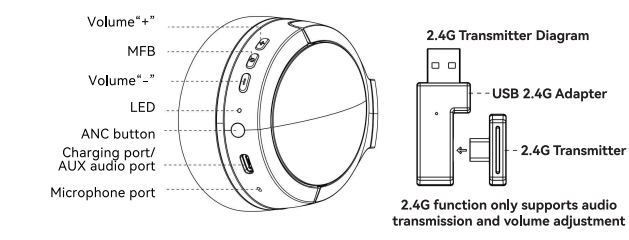

2.4G function only supports audio transmission and volume adjustment

Controls

- | | |
|-----|--|
| MFB | <ul style="list-style-type: none"> • Press and hold (for 2 seconds) to turn the headphone on • Press and hold (for 3 seconds) to turn the headphone off • Press quickly (for 3 times) to turn Voice Assistant on • Press briefly to pause or resume playback • Press briefly to answer or end the call • Press and hold (for 2 seconds) to reject the call |
|-----|--|

EN

ANC Button	<ul style="list-style-type: none"> • Short press to ANC on • Short press to Ambient sound • Short press to Ambient sound off • Double clicks to 2.4G disconnected (in search or connected state) • Double clicks to 2.4G disconnected (in search or connected state)
Volume "+"	<ul style="list-style-type: none"> • Press and hold (for 2 seconds) to play the next song • Press briefly to increase the volume
Volume "-"	<ul style="list-style-type: none"> • Press and hold (for 2 seconds) to play the previous song • Press briefly to decrease the volume

LEDS

Charging	Red light always on
Charging completed / Paired	LED off
Low battery warning	Red light flashes one time every few seconds
Powered on and waiting for pairing	Red and blue light flashing alternately
ANC on/Ambient sound	Green light always on
Ambient sound off	LED off

EN

Specifications	
Product model	Live
Bluetooth version	5.4
Bluetooth range	±10 m
Play time (ANC off) Approx	80 Hours (Volume level 50%)
Play time (ANC on) Approx	50 Hours (Volume level 50%)
Talk time	70 Hours (Volume level 50%)
Standby time (ANC off)	Up to 580 hours
Standby time (ANC on)	Up to 70 hours
Battery capacity	800 mAh
Charging port	USB Type-C
Power input rating	5V / 400 mA
Charging time	4 hours
Net weight	233 g

EN

Warning:
Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
NOTE:
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
FCC Statement:
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
—Reorient or relocate the receiving antenna.
—Increase the separation between the equipment and receiver.
—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
—Consult the dealer or an experienced radio/TV technician for help.
RF exposure compliance statement:
This device has been evaluated to meet the general RF exposure requirement

EN