


BT Audio Antenna Report

Manufacturer: SHENZHEN YINHE XINGKONG KEJI
YOUXIANGONGSI
M/N: 2.4GANT

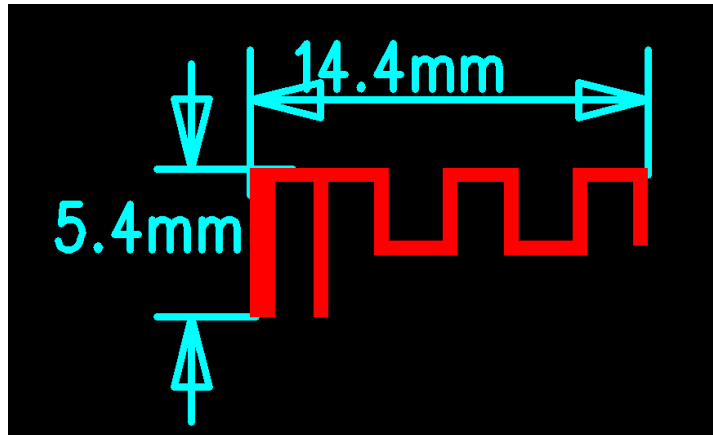

1. Gain and Efficiency

| Frequency (MHz) | Gain (dBi) | Efficiency (dB) | Efficiency (%) |
|-----------------|------------|-----------------|----------------|
| 2400 | 0.21 | -6.62 | 21.26 |
| 2410 | 0.53 | -6.25 | 22.5 |
| 2420 | 0.18 | -6.63 | 22.81 |
| 2430 | 1.05 | -5.64 | 27.28 |
| 2440 | 1.03 | -6.24 | 24.6 |
| 2450 | 0.94 | -5.76 | 26.24 |
| 2460 | 0.55 | -5.56 | 25.28 |
| 2470 | 0.66 | -5.63 | 26.14 |
| 2480 | 0.57 | -6.24 | 23.23 |
| 2490 | 0.33 | -6.37 | 22.85 |