



BQ-001 Bombing wireless Bluetooth headphones




Helmet headscarf
Headphones can be inserted into the headband,



Type-C Charging cable

PRODUCT INTRODUCTION

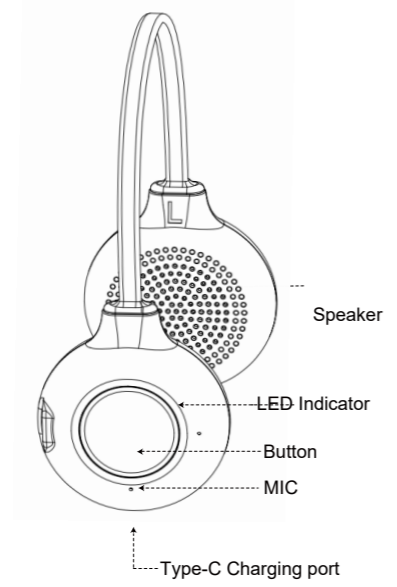


CHARGING




Connect one to one charging cable to charge. The red light on the earphones will flash to indicate charging, and the blue light will stay on when fully charged.

INSTALLATION

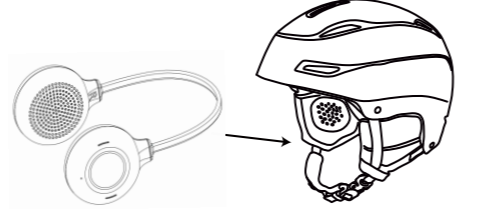

The Bombing Bluetooth headphones are compatible with any snow helmet that has "Audio Ready" earmuffs. Simply place the headphones into the helmet's audio earpiece cover.

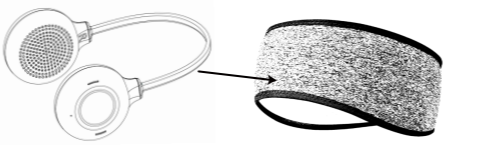

Equipped with a specialized helmet hair band. Headphones can be inserted into the headband,

BLUETOOTH PARAMETERS

1. Bluetooth Name: BQ-001
2. Bluetooth Version: V5.3
3. Supported Protocols: SBC, AAC
4. Transmit Power: class 2
5. Reception Sensitivity: -80dBm
6. Working Frequency: 2.402GHz-2.480GHz
7. Transmission Distance: 10m

BASIC PARAMETERS

1. Weight: About 60g
2. Button: One each on the left and right headphones
3. Battery Specification: Rechargeable lithium polymer battery 3.7V
4. Low Power Warning: 3.4V
5. Continuous Talk Time: 10 hours
6. Continuous Music Playback Time: About 10-11H (at 100% volume)
7. Charging Port: Type-C charging
8. Charging time: About 2 hours
9. Frequency Response: 20Hz~20KHz
10. Operating Temperature: -20°C~60°C
11. Storage Temperature: -20°C~80°C

BUTTON FUNCTION

1. Play music: Click the R headphone button or play directly from your phone.
2. Pause music: During playback, press the R earphone button to pause.
3. Previous song: Double-click the R headphone button for the previous song.
4. Next song: Triple-click the R headset button for the next song.
5. Answer call: When receiving the call, click on the R earphone button.
6. Reject call: When receiving a call, press and hold the R headphone button for 2 seconds.
7. End call: During the call, click the R earphone button.
8. Sound volume: Volume up and down need to be operated on the cell phone, no operation on the headset.
9. Voice Assistant (Requires phone to support and activate): four clicks on the R headset button; and you will hear a "Ding" prompt to activate

BATTERY INDICATOR

1. On iOS and Android devices, you can see the real-time battery level of the headphones.
2. When the battery level is low, the earphones will play an audio prompt of "Low Battery" and the red light will flash.

INSTRUCTIONS FOR USE

1. Power on manually: In the off state, press and hold the R earphone button at the same time for 2 seconds, the red and blue indicator lights will flash alternately, and you will hear an audio prompt of "power on".
2. Power off manually: In the power on state, press and hold the R earphone button for 5 seconds, the blue indicator light will light up, and you will hear an audio prompt of "power off".
3. If powered on and Bluetooth is not connected, the headphones will automatically turn off after 5 minutes.

CHARGING INSTRUCTIONS

When the headphones are connected to a charging cable for charging, the red light flashes. And when the earphones are fully charged, the blue light remains on.

PAIRING

1. In the off state, press and hold the R headphone button for 2 seconds, the blue indicator lights will flash
2. On your device, turn on Bluetooth, search for and add a new device. Select BQ-001 to connect.
3. After the headphones are successfully connected, you will hear "Connected", and the blue indicator light on the right headphones will flash once every 5 seconds
4. Disconnect: If you actively disconnect the headphones, a "Disconnect" audio prompt will appear,

PAIRING NOTES

1. If it is turned on and not connected to any device, the headphones will automatically turn off after 5 minutes.
2. If the headphones cannot be found during the search process, please ensure that the device's Bluetooth is turned on. Turn off the Bluetooth headphones and then turn them back on. After the left earphone and the right one are paired each other, please search for the Bluetooth device once more.
3. If the connection is lost due to the device being too far from the phone and returning to the signal range within 2 minutes, the device will automatically reconnect. If it does not reconnect within 2 minutes, it will enter pairing mode, and if it does not successfully pair within 5 minutes, it will shut down.