
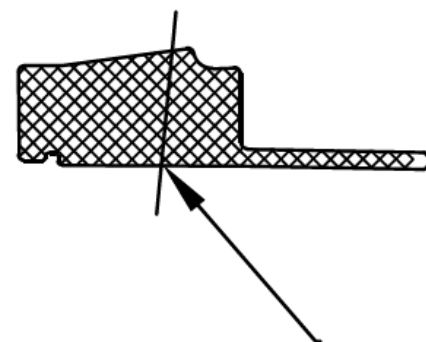


Dimension drawing of Bluetooth Antenna on the Right

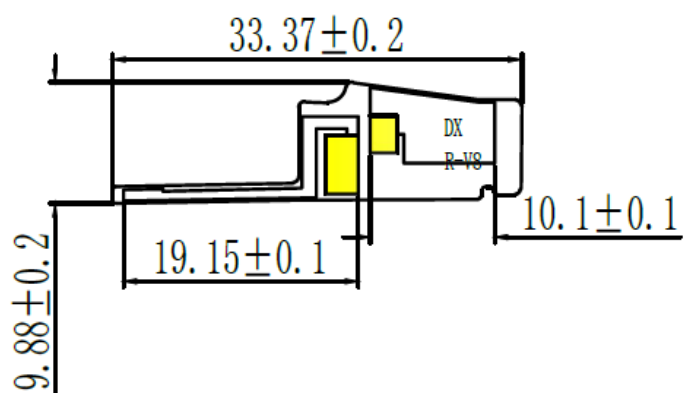

离型纸手撕线


Antenna	PCB
Antenna Gain	0dBi
Frequency Range	2.4Ghz-2.483Ghz
Connector Type	Direct
Location of measurement(company name)	SHENZHEN SHIXINZHONGXIN TECHNOLOGY.CO.,LTD

E5071C Network Analyzer

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Tr1 S11 Smith (R+jX) Scale 1.000U [F1 M Del]

	Freq	R	X	Imp
1	2.4000000 GHz	64.865 Ω	-18.916 Ω	3.5057 pF
2	2.5000000 GHz	35.292 Ω	-12.584 Ω	801.12 pH
>3	2.4500000 GHz	44.488 Ω	-3.1753 Ω	20.458 pF

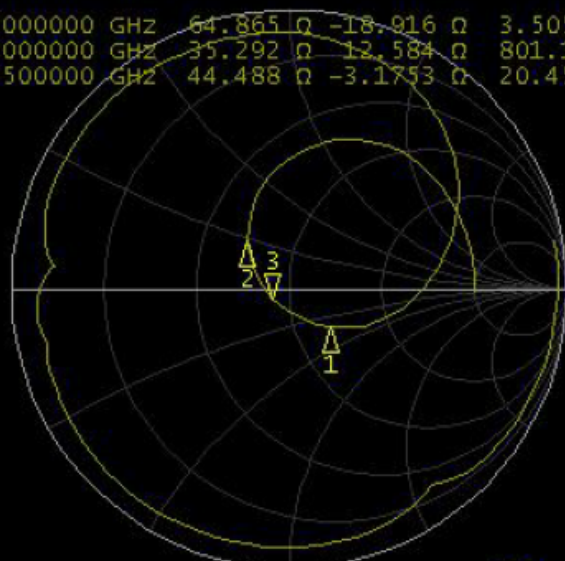


Tr2 S11 Log Mag 10.00dB/ Ref 10.00dB [F1 M]



Tr3 S11 SWR 1.000/ Ref 6.000 [F1 M Del]

	Freq	SWR
1	2.4000000 GHz	1.5169
2	2.5000000 GHz	1.5706
>3	2.4500000 GHz	1.1365

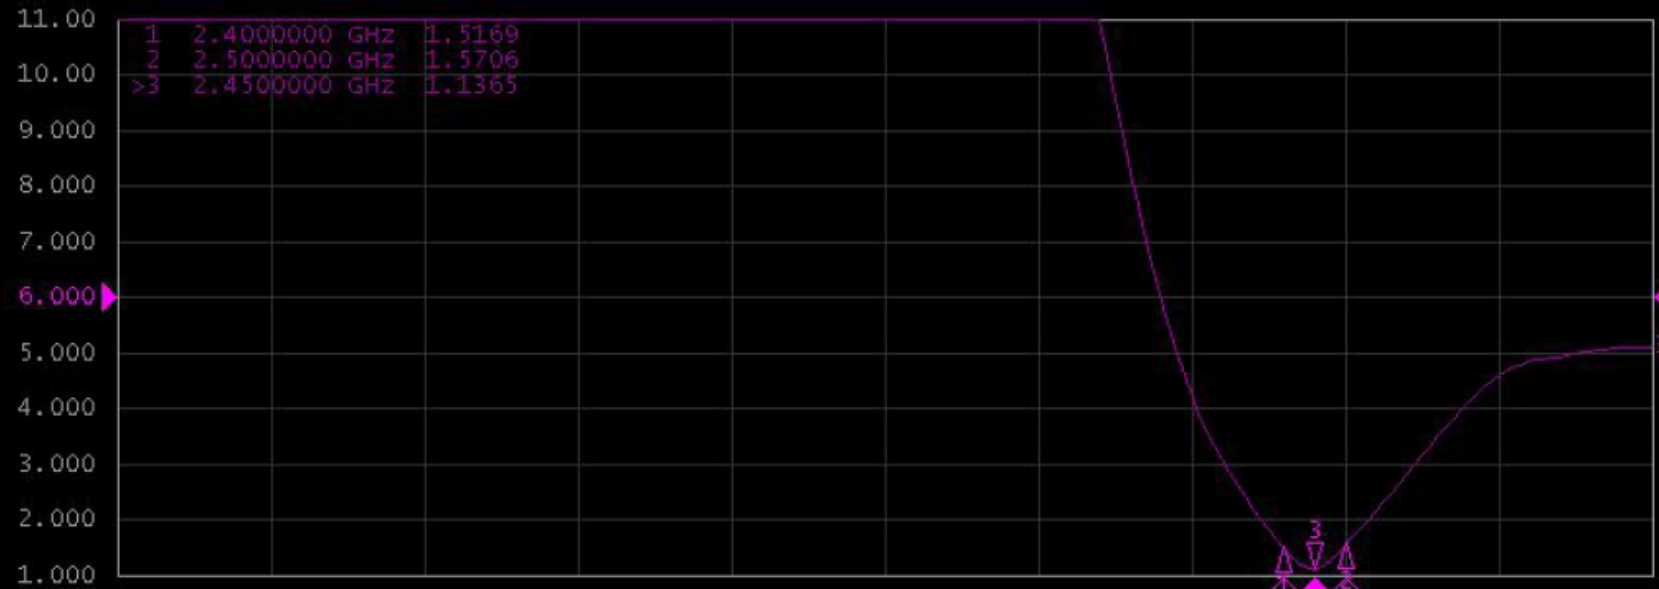

1 Start 500 MHz

IFBW 70 kHz

Stop 3 GHz Sim PExt Cnr