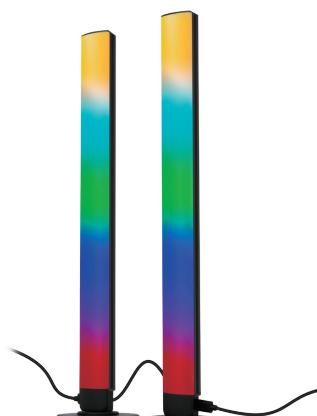
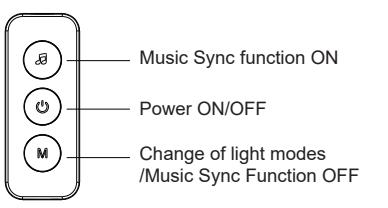
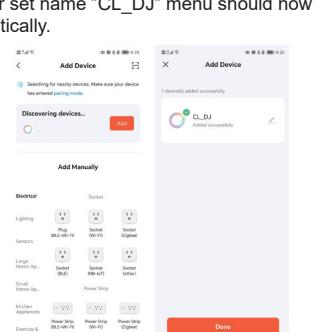
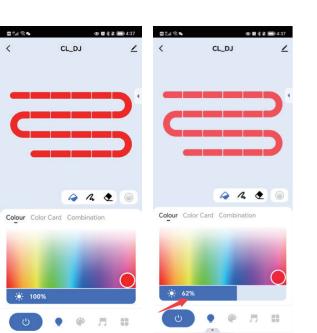
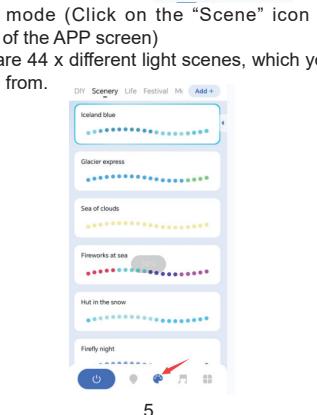
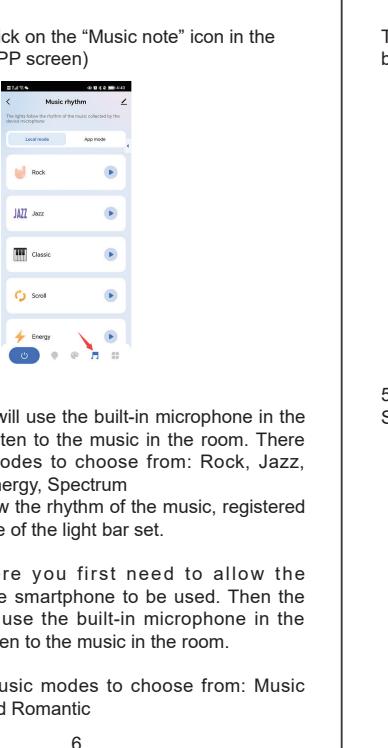
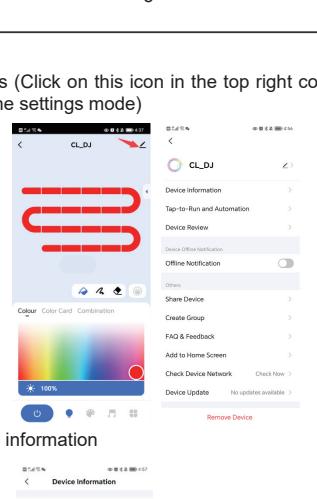
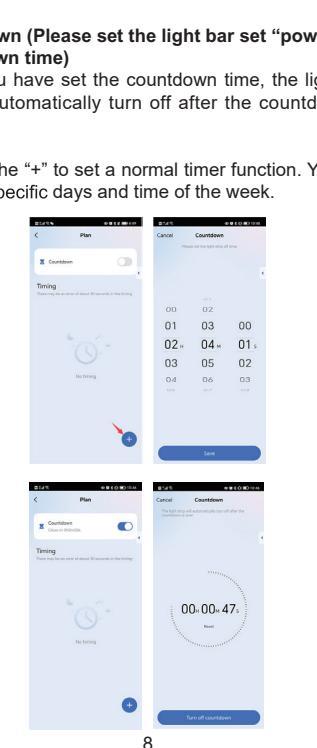
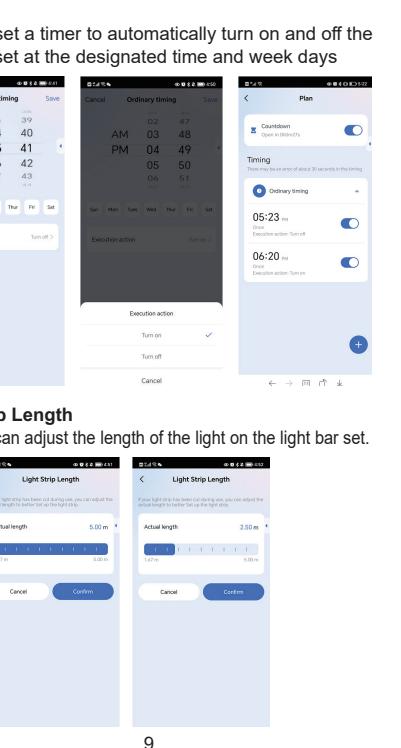

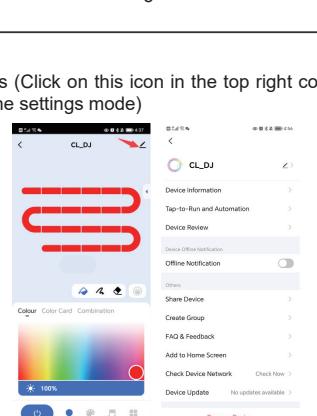
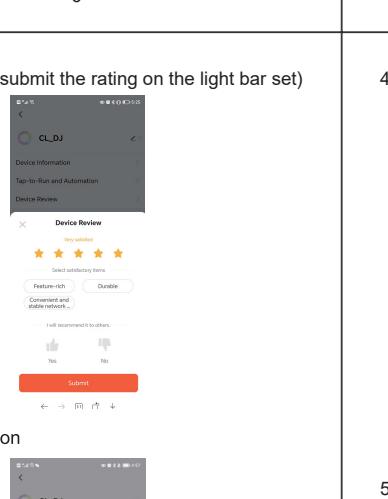
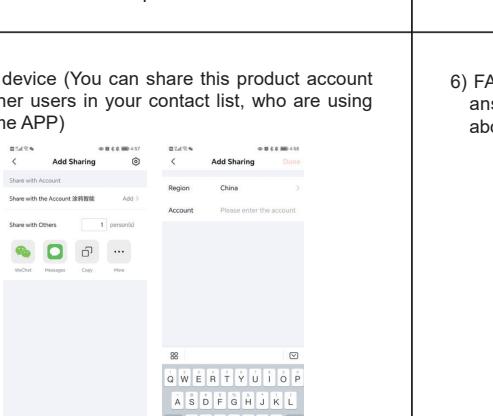
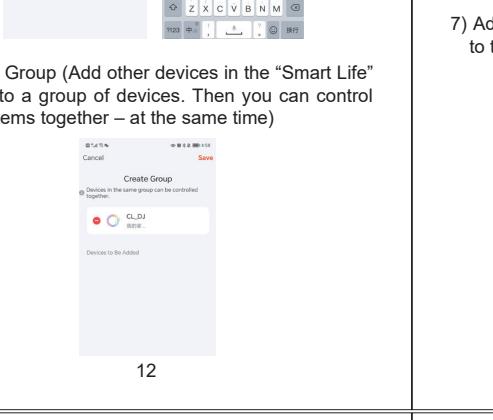
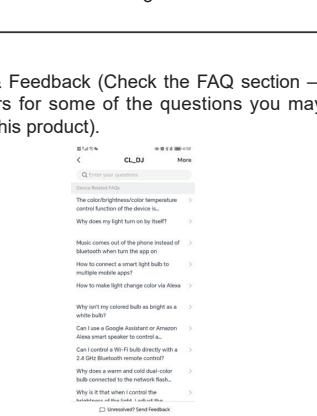
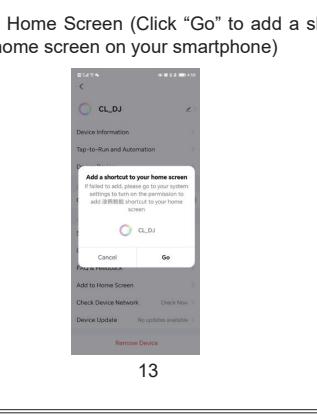
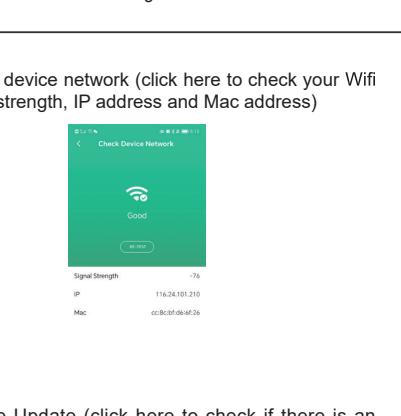
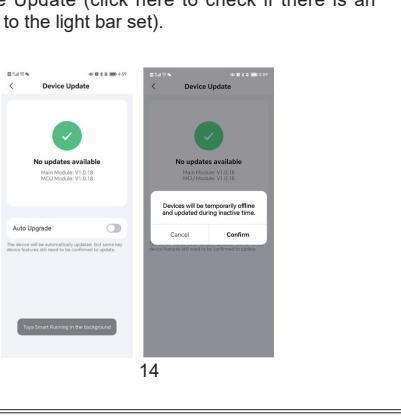


<p style="text-align: center;">SUNLINKCO</p>  <p>LED Table light Model Number: PAK425091 User manual</p>	<p>Characteristics</p> <ul style="list-style-type: none"> • APP controlled • WiFi connection • Works with Android smartphones and iPhones • Compatible with "Tuya Smart" APP and "Smart Life" APP • Works with Google Assistant and Alexa • 44 different light scenes • Can show 7 different colors • Can show 7 different colors at a time • Color changing light • Music sync (can be sound activated) <p>Specifications:</p> <ul style="list-style-type: none"> • 2 pcs smart LED light bar (with stand) • Multi color LED light • 30 LED lights (inside each light bar) • Lifetime: up to 20000 hours • Power supply: DC 5V 2A (USB connector) • Size (each light bar): 38 x 3.4 x 2.5cm <p>How to use the controller unit on the USB connection cable</p> <ol style="list-style-type: none"> 1. By using the controller unit on the USB connection cable, you can control some of the functions on the light bar set. The more advanced controlling and settings of the light bar set must be made in the APP from a smartphone (Android smartphone or iPhone) 2. Press the MUSIC button to activate the "Music Sync" function. Now the light bar set will be sound activated. Press the MODE button to deactivate the "Music Sync" function. 	<p>3. Press the power ON/OFF button to turn the power ON/OFF. Long press the ON/OFF button to reset the light bar set – so that it can be connected to another smartphone.</p> <p>4. Press the MODE button to change between different light scenes</p>  <p>How to pair the light bar set with the "Smart Life" App or the "Tuya Smart" App on your smartphone:</p> <ol style="list-style-type: none"> 1. Download the "Smart Life" APP or the "Tuya Smart" App from Apple AppStore (iPhone) or from Google Play (Android smartphones). 2. Log in (if you already have an account) or set up an account and then log in. Now you can use the APP. 3. Power supply: connect the light bar set to a mobile phone power adapter DC 5V 2A (NOT included). 	<p>Please note that the power adapter must have an output power of minimum 2A, in order to be able to power supply the light bar set.</p> <p>4. After connecting the light bar set to the mobile phone power adapter, then open the "Tuya Smart" APP and turn on the Bluetooth function on your phone. Now press the power button on the controller unit (on the USB cable of the light bar set) for about 3 seconds, the light will be fast flashing. Now click / use the "add device" button in the top right corner of the APP. The light bar set name "CL_DJ" menu should now pop up automatically.</p>  <p>Now choose the name of the room where the light bar set is located.</p> <p>Now the light bar set is paired with the "Smart Life" App</p>	<p>or the "Tuya Smart" App on your smartphone and is ready for use.</p> <p>How to operate the light bar set</p> <ol style="list-style-type: none"> 1. Power ON/OFF (click on the "Power on/off" icon in the bottom of the APP screen) 2. Light mode (click on the "Bulb" icon in the bottom of the APP screen) 3. Color (click on the "Color" icon in the bottom of the APP screen) 4. Brightness (click on the "Brightness" icon in the bottom of the APP screen)
 <p>3. Scene mode (Click on the "Scene" icon in the bottom of the APP screen)</p> <p>There are 44 x different light scenes, which you can choose from.</p>  <p>4. Music mode (Click on the "Music note" icon in the bottom of the APP screen)</p> <p>Local mode</p> <p>The light bar set will use the built-in microphone in the light bar set to listen to the music in the room. There are 6 x music modes to choose from: Rock, Jazz, Classic, Scroll, Energy, Spectrum</p> <p>The light will follow the rhythm of the music, registered by the microphone of the light bar set.</p> <p>APP mode: Here you first need to allow the microphone in the smartphone to be used. Then the light bar set will use the built-in microphone in the smartphone to listen to the music in the room.</p> <p>There are 3 x music modes to choose from: Music rhythm, Game and Romantic</p>	<p>5. Make a plan</p> <p>Set the timer that you want here.</p>  <p>6. Settings (Click on this icon in the top right corner to enter the settings mode)</p>  <p>1) Device information</p>	<p>7. Countdown (Please set the light bar set "power off" countdown time)</p> <p>When you have set the countdown time, the light bar set will automatically turn off after the countdown is finished.</p> <p>Click on the "+" to set a normal timer function. You can choose specific days and time of the week.</p>  <p>8. LED Strip Length</p> <p>Here you can adjust the length of the light on the light bar set.</p> 	<p>9. You can set a timer to automatically turn on and off the light bar set at the designated time and week days</p> 	
 <p>2) Device review (submit the rating on the light bar set)</p>  <p>3) Offline notification</p>	<p>10. 4) Share device (You can share this product account with other users in your contact list, who are using the same APP)</p>  <p>11. 5) Create Group (Add other devices in the "Smart Life" APP into a group of devices. Then you can control these items together – at the same time)</p> 	<p>12. 6) FAQ & Feedback (Check the FAQ section – to get answers for some of the questions you may have about this product).</p>  <p>13. 7) Add to Home Screen (Click "Go" to add a shortcut to the home screen on your smartphone)</p> 	<p>14. 8) Check device network (click here to check your WiFi signal strength, IP address and Mac address)</p>  <p>9) Device Update (click here to check if there is an update to the light bar set).</p> 	
<p>If you choose the "Auto Upgrade" function, the light bar set will be temporarily offline and will be automatically updated during the inactive time.</p> <p>Safety instructions:</p> <ol style="list-style-type: none"> 1. Keep the unit away from heat sources, direct sunlight, humidity, water and any other liquids. 2. Do not expose the unit to moisture, water or any other liquids to avoid damage to the product. 3. Repairing of electrical equipment should only be performed by a qualified electrician. 4. Do not use the unit with wet hands. 5. Do not put objects into any of the openings on the product. 6. Do not attempt to disassemble the product. 7. Keep the unit free from dust. 8. Do not use this unit for anything other than its intended use. 9. This product is not a toy. Keep out of reach of small children. 	<p>FCC Statement</p> <ol style="list-style-type: none"> 1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: <ol style="list-style-type: none"> (1) This device may not cause harmful interference. (2) This device must accept any interference received, including interference that may cause undesired operation. 2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. <p>Note: This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:</p> <ul style="list-style-type: none"> • Reorient or relocate the receiving antenna. • Increase the separation between the equipment and receiver. • Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. • Consult the dealer or an experienced radio/TV technician for help. 	<p>The device has been evaluated to meet general RF exposure requirement. This equipment should be installed and operated with a minimum distance of 20 cm between the radiator and your body.</p>		