


**EKSA**

**E900 BT**  
Wireless Gaming Headset



**User Manual**

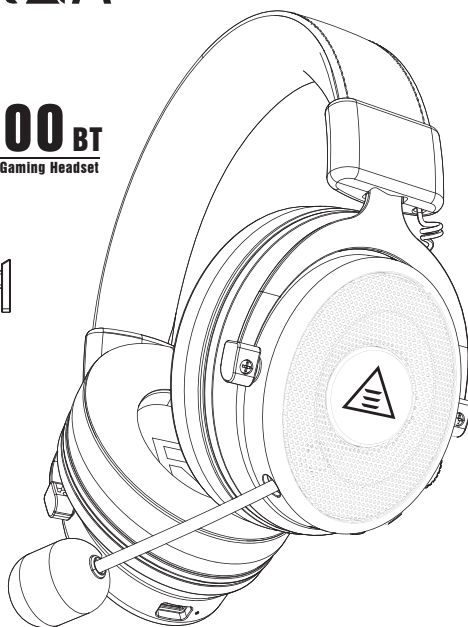

## Language Guide



English	1
Français	12
日本語	23
Deutsch	34
Русский	45
Português	56

EN



## Package Contents

- ① 1\* EKSA E900 BT Wireless Headset
- ② 1\* Type-C to USB Adaptor
- ③ 1\* Type-C Transmitter
- ④ 1\* Microphone Foam Cover
- ⑤ 1\* Type-C Charging Cable
- ⑥ 1\* 3.5mm Audio Cable
- ⑦ 1\* Carry Pouch
- ⑧ 1\* User Manual
- ⑨ 1\* Card

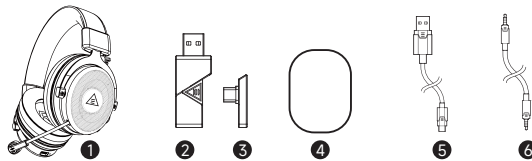


## Specification


Product Name: E900 BT  
Bluetooth Version: 5.3  
Driver Diameter: 50 mm  
Impedance:  $32 \Omega \pm 15\%$   
Sensitivity:  $98 \pm 3$  dB  
Frequency Response: 20 Hz - 20 kHz  
Battery: 1000 mAh / 3.7 V  
Charging Time: 2 hours  
Play Time: 50 hours (light off)  
Bluetooth Range: 10 m



## Product Overview

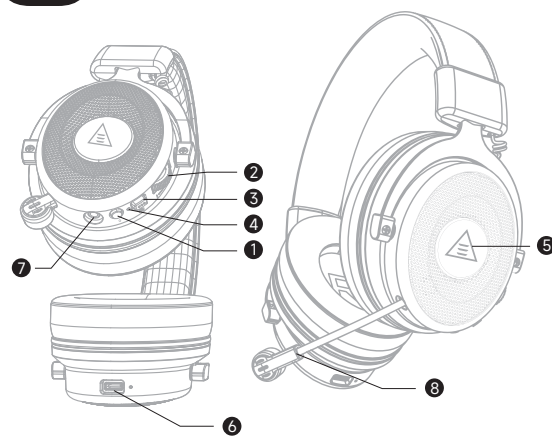

- ① Power Button
- ② Volume Knob
- ③ Microphone Mute Button
- ④ LED Status Indicator
- ⑤ LED Backlight
- ⑥ Type-C Charging Port
- ⑦ 3.5mm Audio Port
- ⑧ Retractable Microphone
- ⑨ Type-C to USB Adaptor
- ⑩ Type-C Transmitter
- ⑪ 3.5mm Audio Cable
- ⑫ Type-C Charging Cable
- ⑬ Microphone Foam Cover
- ⑭ Carrying Pouch





## Operation Guide



### Power On/Off



(1) Long press the "Power button" for about 2 seconds in the off state. If the blue light is on for 1 second, the headset will be turned on.




(2) Long press the "Power button" for about 2 seconds in the on state. If the red light is on for 1 second, the headset will be turned off.

**Note: 1. In the case of no connection, the headset will automatically shut down after 3 minutes.**



## Bluetooth Pairing Connection


(1) Long press the "Power button" for about 5 seconds in the off state and turn on. If the blue and red lights flash alternately, the headsets will enter the paired state.

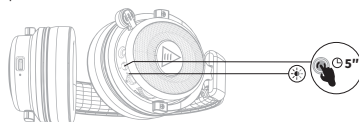

(2) If the connection is not successful after startup, it will automatically enter the pairing state.

(3) When the headset is disconnected, it will automatically enter the pairing state.

(4) Turn on Bluetooth of the device, search for Bluetooth headset, and then select "EKSA E900 BT" for pairing connection. After the connection is successful, the headset will prompt "Connected", the blue light will keep on, and the device will display that the Bluetooth headset is connected.

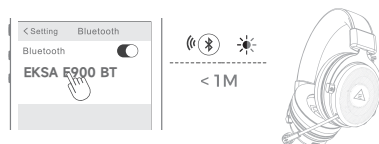


**Note: 1. If you want to connect a new device, you need to disconnect the Bluetooth connection from the connected device first, and the headset will automatically enter the pairing state. Then use the new device for Bluetooth search and complete the connection with the headset;**  
**2. Each time the headset is turned on, it will automatically search and connect the most recently connected device.**




## 2.4GHz Transmitter Connection

(1) Insert the 2.4GHz transmitter into the computer or mobile phone and other devices. The adapter will automatically start up and the blue LED flashes to enter the pairing state.

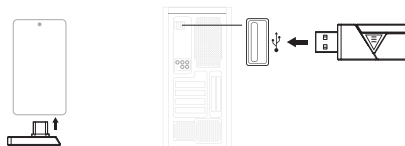

(2) Turn on the headset, and the headset and adapter will be automatically connected successfully.

(3) After successful connection, the blue light of the headset and the blue light of the adapter should remain steady on.

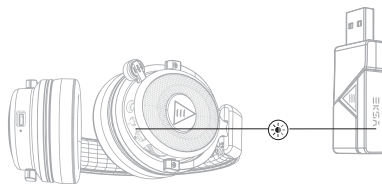

**Note:** When connecting a computer with Bluetooth to the E900 BT, you can connect through a USB adapter or Bluetooth. Select the audio driver named EKSA E900 BT for Bluetooth connection, and select the audio driver named EKSA E900 BT 2.4G for USB adapter.




## 2.4GHz Transmitter Settings on Your Computer


Follow the steps below to ensure your EKSA E900 BT 2.4G is the default audio device.

### Windows®:


#### Audio Settings:

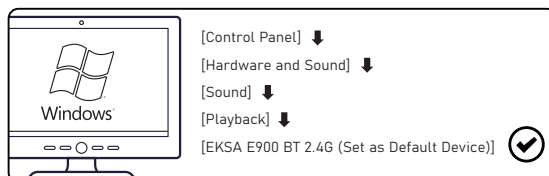

#### Microphone Settings:

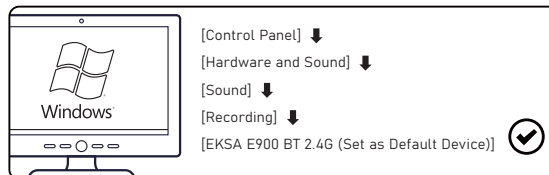

### macOS:

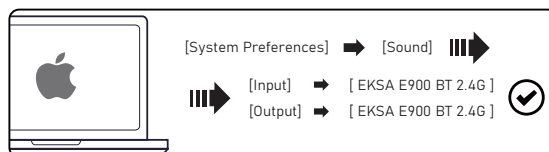






## Bluetooth Connection Switch 2.4GHz Transmitter Connection

**Note: Bluetooth and 2.4G connection cannot be used on the same device.**

- (1) Bluetooth connection mode is enabled by default after turn-on.
- (2) In Bluetooth connection mode, Click the power button to switch to USB adapter connection mode.
- (3) In USB adapter connection mode, Click the power button to switch back to Bluetooth connection mode.

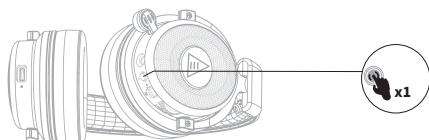


**Note: Connection mode switch is invalid in Bluetooth incoming call, canceling call, and call state.**



## 3.5mm Wired Connection

- (1) In the on state, insert the 3.5mm audio cable, the headset will automatically turn off, and the headset will switch to the 3.5mm wired connection mode.

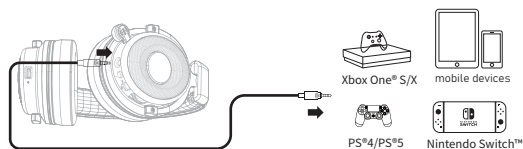

- (2) In the 3.5mm wired connection mode, the headset cannot be turned on.
- (3) In 3.5mm wired connection mode, volume increase or decrease is effective, while other functions are invalid.



## Operation Guide



### Volume Increase and Decrease



+

(1) Slide the volume plus knob to + direction, increase the volume



-


(2) Slide the volume plus knob to - direction, decrease the volume



### Microphone Mute Button



(1) Click the microphone mute button to mute the microphone. The voice prompt is "MIC Off".



(2) Click the microphone mute button again to unmute the microphone. The voice prompt is "MIC On".

### Audio Switch



(1) The last used sound mode is used by default after startup

(2) Double-click the microphone mute button and then switch the sound effects in three modes successively: music mode-gaming mode-movie mode