EMC TEST REPORT

Project No.	LBE20220274	Issue No.	0			
	Name of organization	Samsung Elect	ronics Co., Ltd.			
Applicant	Address	,	129, Samsung-ro, Yeongtong-gu, onggi-do, 16677, Korea			
*	Date of receipt	May 9, 2022				
	Type of device	☐ Class B pers	eivers subject to Part 15 sonal computers and peripherals B digital devices and peripherals ast Receiver			
	Equipment authorization	■ Certification	☐ Supplier's Declaration of Conformity			
	FCC ID	A3LSMR915				
FUT	Kind of product	Smart Wearable				
EUT	Model No.	SM-R915U				
	Variant Model No.	Refer to clause 4.6				
	Manufacturer	Samsung Electronics Vietnam Co., Ltd. Yenphong 1 - I.P Yentrung Commune, Yenphong Dist., Bac Ninh Province, Vietnam AG TECH CO., LTD Lot G3, Que Vo Industrial Park(Expanded Area), Nam S Ward, Bac Ninh City, Bac Ninh Province, Vietnam				
Applied Sta	ndards	47 CFR Part 15, Subpart B, Class B / ANSI C63.4-2014				
Test Period		May 9, 2022 ~ May 12, 2022				
Issue date		May 13, 2022				
Test result	: Complied					
	ent under test has found to attached test result for mo	be compliant with the applied standards. pre detail.)				
Tested by	: Soo-Joon Kim	Reviewed by : Chang-Eun Park				
	S. J. Kim		C-E-Park			

The test results in this report only apply to the tested sample. This report must not be reproduced, except in full, without written permission from Global CS center. * Not KOLAS report

Samsung Electronics Co., Ltd., Global CS Center (Maetan dong) 129, Samsung-ro, Yeongtong-Gu, Suwon-Si,Gyeonggi-Do 16677, Korea

Table of Contents

1. Report Information	3
1.1 Revision history	3
2. Summary of test results	3
2.1 Emission	3
3. General Information	3
3.1 Test facility	3
4. Test Setup configuration	4
4.1 Test Peripherals	4
4.2 EUT operating mode	5
4.3 Details of Sampling	5
4.4 Used cable description	6
4.5 Test arrangement	7
4.6 EUT Description	10
4.7 EUT Frequencies	10
4.8 Test configuration and condition	11
4.9 Measurement uncertainty	11
5. Results of individual test	12
5.1 Conducted Emission	12
5.2 Radiated Emission	16

Smart Wearable: SM-R915U

1. Report Information

1.1 Revision history

No.	Date of Issue	Revised detailed information
Issue 0	May 13, 2022	There are no revisions and this version is basic test report.

X Remark

Only compliance with Part 15B (Section 15.107 Conducted limits) requirements for the receiver part of the licensed transmitter (equipment code CXX) is covered by this report.

2. Summary of test results

2.1 Emission

The EUT has been tested according to the following specifications:

Applied	Test type	Applied standard	Result
•	Conducted Emission (Mains port)	47 CFR Part 15 Subpart B /	Complied
	Radiated Emission	ANSI C63.4-2014 (Class B)	Complied

3. General Information

3.1 Test facility

The Global CS Center is located on Samsung Electronics Co., Ltd. at (Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea.

All testing are performed in Semi-anechoic chambers conforming to the site attenuation characteristics defined by ANSI C63.4, CISPR 32, CISPR 16-1-4 and Shielded rooms. And all antennas are properly calibrated using ANSI C63.5:2017.

The Global CS Center is an ISO/IEC 17025 accredited testing laboratory by the National Radio Research Agency with designation No. KR0004. for EMC testing.

Smart Wearable: SM-R915U

4. Test Setup configuration

4.1 Test Peripherals

The cables used for these peripherals are either permanently attached by the peripheral manufacturer or coupled with an assigned cable as defined below.

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Description	Model No.	Model No. Serial No. Manufactur Trademar		FCC ID
Smart Wearable	SM-R915U	-	SAMSUNG	A3LSMR915
Battery	EB-BR910ABY	-	SDI	-
Wireless Charger	EP-OR900	RF7T2204185RTC	RF TECH	A3LEPOR900
Laptop Computer	Latitude5580	1WYRYM2	Dell	DoC
Laptop Computer	otop Computer Latitude5580 D3		Dell	DoC
Laptop AC Adapter	LA65NM130	5DEA	Dell	DoC
Laptop AC Adapter	LA65NM130	5B3C	Dell	DoC
Mouse	AA-SM7PCPB	CN57BA5903634AD V8JJCD4371	SAMSUNG	DoC
Mouse	SMH-210UB	TAKGA05788Z	SAMSUNG	DoC
Router	DIR-806A	RF0F1D8018454	D-Link	DoC
Router	Router DIR-806A		D-Link	DoC
Travel Adapter EP-TA800		R37N9AQ96L8SE3	SoluM	-

Smart Wearable: SM-R915U

4.2 EUT operating mode

To achieve compliance applied standard specification including CXX, and JAB requirement, the following mode(s) were made during compliance testing:

4.2.1 Conducted Emission

No.	Operating mode
1	Wireless charging (w/TA) + Cellular receiver (LTE FDD26 Center Frequency)
2	Audio playback from internal memory + Wireless charging (w/TA)
3	Wireless charging (w/USB port of laptop computer)

4.2.2 Radiated Emission

No.	Operating mode
1	Wireless charging (w/TA)
2	Audio playback from internal memory
3	Wireless charging (w/USB port of laptop computer)

4.3 Details of Sampling

Customer selected, single unit.

Smart Wearable: SM-R915U


4.4 Used cable description

The EUT is configured, installed, arranged and operated in a manner consistent with typical applications. Interface cables/loads/devices are connected to at least one of each type of interface port of the EUT, and where practical, each cable shall be terminated in a device typical of actual usage. The type(s) of interconnecting cables to be used and the interface port (of the EUT) to which these were connected:


Connected cable	Length [m]	Shielded [Y/N]	Note	
Wireless Charger Cable	0.8	Y	For Wireless Charger	
Power	1.8	N	From Laptop Computer to AC Adapter	
Power	1.5	N	For Laptop AC Adapter	
LAN	1.5	N	From Laptop Computer to Router	
USB	0.8	Y	From Laptop Computer to Router for DC Power	
USB	1.8	Y	From Laptop Computer to Mouse	

4.5 Test arrangement

4.5.1 Conducted Emission

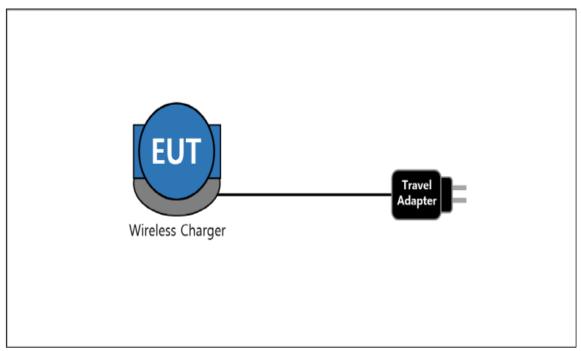


[Mode 1 – 2]

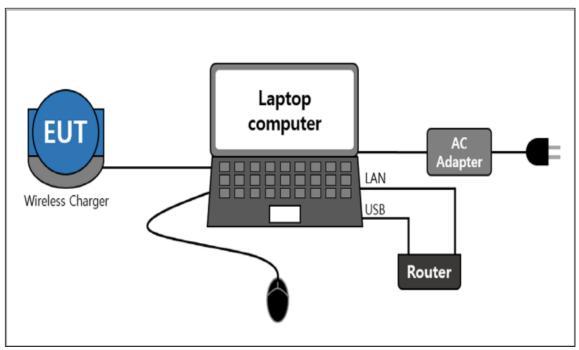


[Mode 3]

Smart Wearable: SM-R915U


4.5.2 Radiated Emission

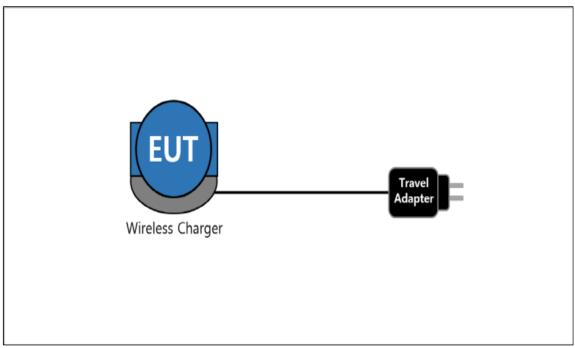

[Mode 1]

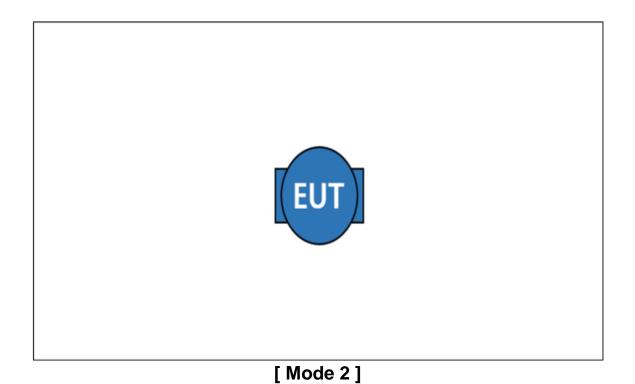

-8/23-

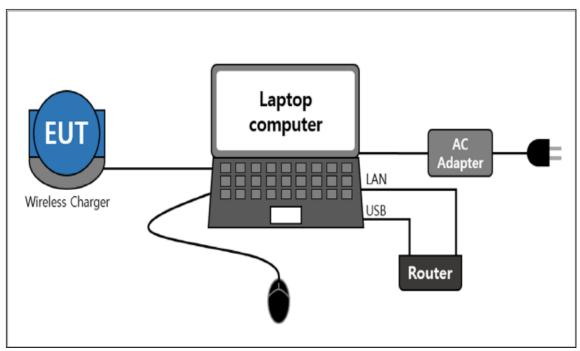

[Mode 3]

Smart Wearable: SM-R915U

4.6 EUT Description

The EUT is a watch type smart wearable which can operate on WCDMA FDD 2/4/5, LTE FDD 2/4/5/12/13/25/26/66/71, and incorporates a Bluetooth, Wi-Fi (802.11 b/g/n/a), Audio, GNSS, NFC and Wireless Charging.

4.6.1 The variant models

- SM-R915F

4.7 EUT Frequencies

The highest frequencies (Generated and used)	Frequency [MHz]	
Wi-Fi	5 825	

Smart Wearable: SM-R915U

4.8 Test configuration and condition

The system was configured for testing in a typical fashion that a customer would normally use. Cables were attached to each of the available I/O Ports. Where applicable, peripherals were attached to the I/O cables.

The EUT was investigated in three orientations and the worst case orientation is reported.

RX mode(850MHz) testing for AC conducted emission test was performed with the LTE FDD26 RX Test mode at center frequency. All licensed communication (850MHz) RX mode, GSM/WCDMA/LTE, test results are not significantly different.

The audio(1kHz sound) were repetitively played.

The EUT was charged with wireless charger connected to travel adapter or USB port of laptop computer.

Power source for the EUT operating was supplied by CVCF made by the Pacific Corp.

- Test Voltage : AC 120 V, 60 Hz

4.9 Measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus: (According to CISPR 16-4-2 and UKAS M3003)

Test	type	Measurement uncertainty (C.L. approximately 95 %, <i>k</i> = 2)
Conducted Emission	AC Mains	2.83 dB
Radiated Emission	Horizontal	4.62 dB
(Below 1 GHz)	Vertical	5.79 dB
Radiated Emission	Horizontal	4.99 dB
(Above 1 GHz)	Vertical	4.99 dB

^{*} Remark

 The values for uncertainty of conducted and radiated emissions are less than the Corresponding values of Ucispr given in CISPR 16-4-2. Therefore no adjustment of measurement results is necessary when comparing them with the relevant limits.

Smart Wearable: SM-R915U

5. Results of individual test

5.1 Conducted Emission

The EUT is connected to a LISN via travel adapter. If the EUT is connected to the Laptop Computer USB port, the Laptop AC adapter is connected to a LISN.

Both conducted lines are measured in Quasi-Peak and CISPR-Average mode, including the worst-case data points for each tested configuration. The EUT measured in accordance with the methods described in standards.

Limits for Conducted emission at the mains ports of Class B

Frequency range Limits	Resolution Bandwidth	Limits [dB(μV)]		
[MHz]	[kHz]	Quasi-peak	Average	
0.15 to 0.50	9	66 to 56	56 to 46	
0.50 to 5	9	56	46	
5 to 30	9	60	50	

NOTE 1 The lower limit shall apply at the transition frequency.

NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

5.1.1 Test instrumentation


EMC		Model name	Manufacturer	Serial No.	Next Calibration	
No.	Test Instrument				Date	Interval (Month)
E5I-006	LTE Communicator	CMW500	R&S	132728	2023-04-12	12
E5I-127	Two-Line V-Network	ENV216	R&S	102061	2023-01-17	12
E5I-016	EMI Test Receiver	ESU8	R&S	100482	2022-06-03	12
-	Test software	EMC32	R&S	Ver 10.60.20	-	-

5.1.2 Temperature and humidity condition

Test date	2022-05-09	Test engineer	Soo-Joon Kim			
	Ambient temperature	(24.7 ± 0.5) °C	Limit (15.0 to 35.0) °C			
Climate condition	Humidity	(29.3 ± 0.5) % R.H.	Limit (25.0 to 75.0) % R.H.			
	Atmospheric pressure (100.9 ± 0.5) kPa		Limit (86.0 to 106.0) kPa			
Test place	Shield Room (SR8)					

5.1.3 Test Results

□ Operating Mode 1: AC Mains

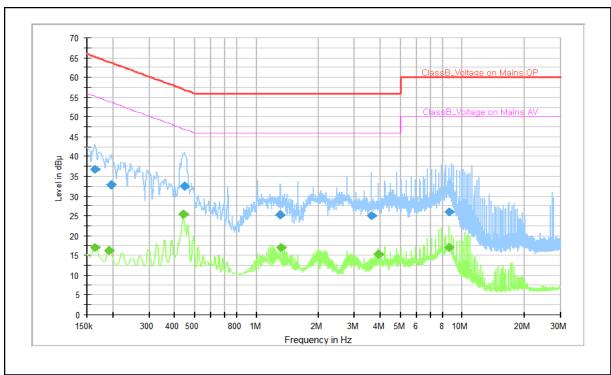

Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

QP / CAV final measurement results table:


Frequency (MHz)	QP (dBµV)	CAV (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.164	36.7		65.3	28.6	L1	10.2
0.164		17.0	55.3	38.3	L1	10.2
0.193		16.2	53.9	37.8	L1	10.1
0.197	32.8		63.7	30.9	N	10.0
0.440		25.4	47.1	21.6	L1	10.2
0.445	32.5		57.0	24.4	N	10.1
1.307	25.3		56.0	30.7	L1	10.0
1.313		17.1	46.0	28.9	L1	10.0
3.631	25.1		56.0	30.9	L1	10.0
3.919		15.2	46.0	46.0 30.8 L1		10.0
8.565	26.0		60.0	34.0	L1	10.1
8.565		17.1	50.0	32.9	L1	10.1

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)

Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)

QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor

□ Operating Mode 2: AC Mains

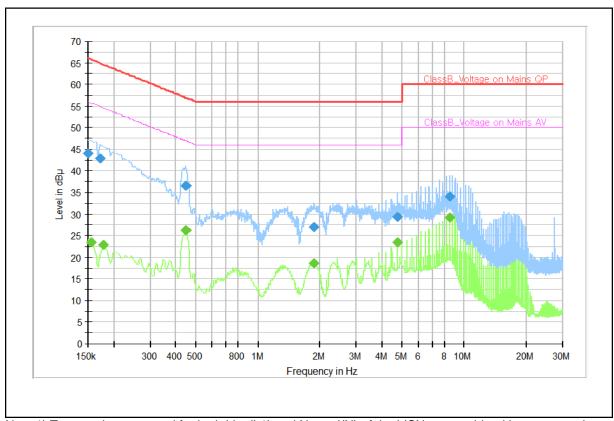

Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

QP / CAV final measurement results table:


Frequency (MHz)	QP (dBµV)	CAV (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.150	44.0		66.0	22.0	N	9.9
0.155		23.5	55.8	32.2	N	10.0
0.173	42.8		64.8	22.0	L1 10	10.3
0.177		22.9	54.6	31.8	L1	10.3
0.445		26.3	47.0	20.7	L1	10.2
0.445	36.6		57.0	20.4	N	10.1
1.867		18.6	46.0	27.4	L1	10.0
1.869	27.1		56.0	28.9	L1	10.0
4.742		23.4	46.0	22.6	L1	10.0
4.742	29.4		56.0	26.6	L1	10.0
8.480		29.1	50.0	20.9	L1	10.1
8.480	34.1		60.0	25.9	L1	10.1

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)

Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)

QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor

□ Operating Mode 3: AC Mains

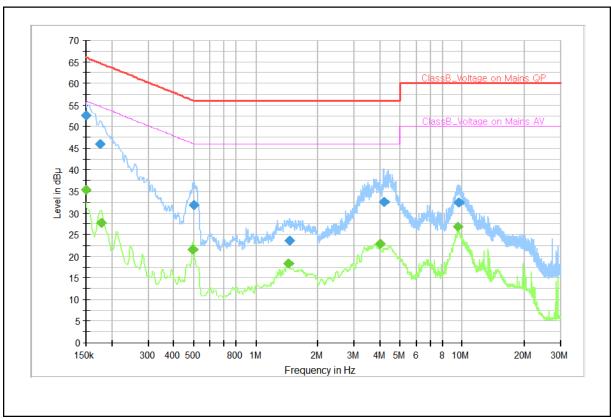

Note 1) Two graphs measured for both Live(L1) and Neutral(N) of the LISN are combined into one graph.

QP / CAV final measurement results table:

Frequency (MHz)	QP (dBµV)	CAV (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.150		35.4	56.0	20.6	N	9.8
0.150	52.6		66.0	13.4	N	9.8
0.175	46.0		64.7	18.7	N	10.1
0.177		27.7	54.6	27.0	L1	10.1
0.497		21.5	46.1	24.6	L1	10.0
0.501	31.9		56.0	24.1	L1	10.0
1.439		18.3	46.0	27.7	N	9.8
1.462	23.7		56.0	32.3	N	9.8
4.009		22.9	46.0	23.1	N	9.8
4.166	32.6		56.0	23.4	N	9.8
9.535		26.8	50.0	23.2	L1	9.9
9.647	32.4		60.0	27.6	L1	9.9

Note 2) Level (QP and/or CAV) = Meter Reading (QP and/or CAV) + Corr. (LISN Insertion Loss + Cable Loss)

Margin (QP and/or CAV) = Limit – Level (QP and/or CAV)

QP = Quasi-Peak, CAV = CISPR-Average, Corr. = Correction Factor

Smart Wearable: SM-R915U

5.2 Radiated Emission

The following data lists the significant emission frequencies, measured levels, correction factors (for antenna and cables), orientation of table, polarization and height of antenna, the corrected reading, the limit, and the amount of margin.

Peak measurements were made over the changeable frequency range 30 MHz to 1 GHz at a measurement distance of 3 m for the following antenna and turntable arrangements:

Antenna Height [cm]	Antenna Polarization	Resolution Bandwidth [kHz]	Video Bandwidth [kHz]	Turntable position [degrees]
100 ~ 400	Horizontal, Vertical	120	300	Continuous

Measurements within 6 dB of the limit were then maximized by adjusting turntable position.

Final measurements were made using quasi-peak detector.

Peak/CISPR-Average measurements were made over the changeable frequency range 1 GHz to 40 GHz or 5th harmonics of the highest frequency generated or used in the device or on which the device operates or tunes at a measurement distance of 3 m for the following antenna and turntable arrangements. The measurements above 1 GHz were performed with the bore-sighting antenna aimed at the EUT.

Antenna Height [cm]	Antenna Polarization	Resolution Bandwidth [MHz]	Video Bandwidth [MHz]	Turntable position [degrees]	
100 ~ 400	Horizontal, Vertical	1	3	Continuous	

Measurements within 6 dB of the limit were then maximized by adjusting turntable position.

Final measurements were made using peak and CISPR-average detectors.

Limits for Radiated emission of Class B at a measuring distance of 3 m and 10 m

Frequency range Limits	Field Strength						
[MHz]	3 m [μV/m]	3 m [dB(µV/m)]	10 m [dB(μV/m)]				
30 to 88	100	40.0	29.5				
88 to 216	150	43.5	33.0				
216 to 960	200	46.0	35.5				
Above 960	500	54.0	43.5				

Note) Distance correction fomula from D1(3m) to D2(10m)

: Limit at D2 = Limit at D1 + 20Log(D1/D2)

Results checked manually; and points close to the limit line were re-measured.

Smart Wearable: SM-R915U

5.2.1 Test instrumentation

EMC		Model			Next Calibration		
No.	Test Instrument	name	Manufacturer	Serial No.	Date	Interval (Month)	
E5I-021	EMI Test Receiver	ESU40	R&S	100376	2023-01-28	12	
E5I-020	EMI Test Receiver	ESU40	R&S	100375	2022-09-23	12	
E5I-072	BiLog Antenna	CBL6112D	TESEQ	36009	2022-05-15	24	
E5I-223	6 dB Fixed Attenuator	8491B-006	Agilent	58359	2022-05-15	24	
E5I-075	Preamplifier	310N	SONOMA	332018	2022-05-26	12	
E5I-035	Horn Antenna	HF907	R&S	100506	2022-09-28	12	
E5I-039	Signal Conditioning Unit	SCU-18	R&S	10211	2023-04-18	12	
E5I-243	WideBand Horn Antenna	QMS-00880	STEATITE	25187	2022-11-17	12	
E5I-042	Signal Conditioning Unit	Conditioning Unit SCU-40A F		10004	2022-09-10	12	
-	Test software	EP7RE	TOYO	Ver 8.0.20	-	-	
-	Test software	EMC32	R&S	Ver 9.25.00	-	-	


5.2.1 Temperature and humidity condition

Test date	2022-05-10, 2022-05-12	Test engineer	Soo-Joon Kim			
	Ambient temperature	(23.2 ± 0.5) °C	Limit (15.0 to 35.0) °C			
Climate condition	Humidity	(35.9 ± 0.5) % R.H.	Limit (25.0 to 75.0) % R.H.			
	Atmospheric pressure	(101.6 ± 0.5) kPa	Limit (86.0 to 106.0) kPa			
Test place	Semi-Anechoic Chamber (SAC5)					

5.2.3 Test Results

□ Operating Mode 1

- Frequencies below 1 GHz

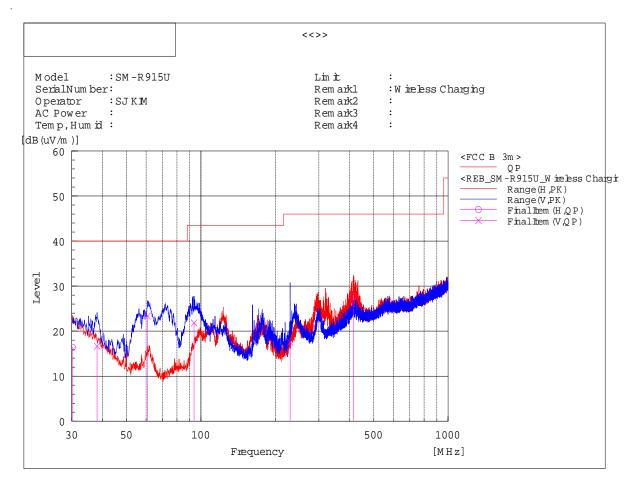

No.	Frequency	(P)	Reading QP	c.f	Result QP	Limit QP	Margin QP	Height	Angle	Remark
	[MHz]		[dB(uV)]	[dB(1/m)]	[dB(uV/m)]	[dB(uV/m)]	[dB]	[cm]	[deg]	
1	30.243	Η	23.0	-6.6	16.4	40.0	23.6	101	176	
2	38.003	V	27.2	-10.5	16.7	40.0	23.3	154	313	
3	60.798	V	42.0	-18.6	23.4	40.0	16.6	100	70	
4	93.778	V	37.0	-15.1	21.9	43.5	21.6	104	360	
5	229.578	V	31.3	-13.8	17.5	46.0	28.5	100	2	
6	413.999	Η	34.0	-6.3	27.7	46.0	18.3	100	179	

Note1) Receiving antenna polarization: Horizontal, Vertical

Test Distance: 3 m, Antenna Height: 1 to 4 meters

Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)


Margin (QP) = Limit - Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

This report must not be reproduced, except in full, without written permission from Global CS Center.

Smart Wearable: SM-R915U

- Frequencies above 1 GHz

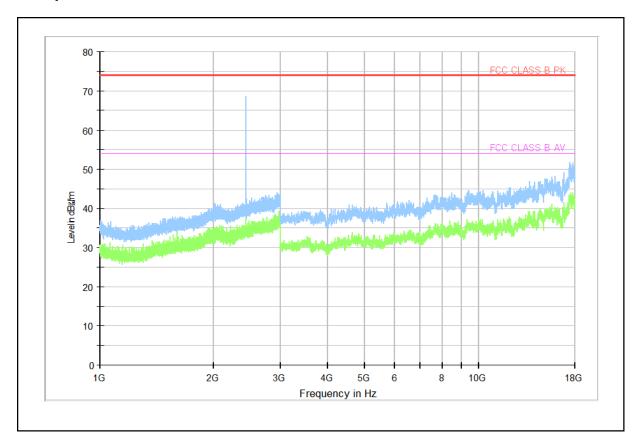

Note 1) We have also tested from 18 GHz to 30 GHz and found no emissions.

Note 2) Receiving antenna polarization: Horizontal, Vertical

Test Distance: 3 m, Antenna Height: 1 to 4 meters

Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit – Level (PK and/or CAV)


PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor

Note 3) Radiated emissions (Tx / Rx frequency) from the transceiver shall be ignored.

- Data transmission in the 2.4 GHz ISM band (Bluetooth/Wi-Fi)
- : Operating frequencies (2 400 ~ 2 483.5) MHz

□ Operating Mode 2

- Frequencies below 1 GHz

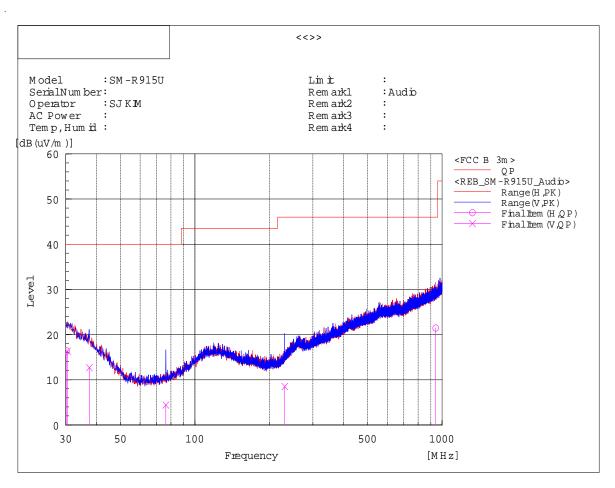

Final Result

No.	Frequency	(P)	Reading	c.f	Result	Limit	Margin	Height	Angle	Remark
	[107]		QP	[]= /1 / \]	QP	QP	QP			
	[MHz]		[dB(uV)]	[dB(1/m)]	[dB(uV/m)]	[dB(uV/m)]	[dB]	[cm]	[deg]	
1	30.243	Η	23.0	-6.6	16.4	40.0	23.6	102	169	
2	30.485	V	23.0	-6.7	16.3	40.0	23.7	103	92	
3	37.396	V	22.9	-10.2	12.7	40.0	27.3	103	103	
4	76.196	V	22.2	-17.8	4.4	40.0	35.6	102	273	
5	230.790	V	22.2	-13.7	8.5	46.0	37.5	393	227	
6	942.527	Η	20.7	0.7	21.4	46.0	24.6	249	18	

Note1) Receiving antenna polarization: Horizontal, Vertical

Test Distance: 3 m, Antenna Height: 1 to 4 meters


Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit - Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

Smart Wearable: SM-R915U

- Frequencies above 1 GHz

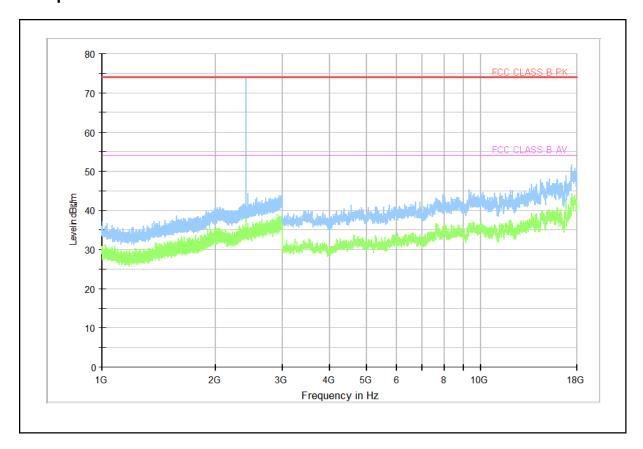

Note 1) We have also tested from 18 GHz to 30 GHz and found no emissions.

Note 2) Receiving antenna polarization: Horizontal, Vertical

Test Distance: 3 m, Antenna Height: 1 to 4 meters

Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit – Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor


Note 3) Radiated emissions (Tx / Rx frequency) from the transceiver shall be ignored.

- Data transmission in the 2.4 GHz ISM band (Bluetooth/Wi-Fi)
- : Operating frequencies (2 400 ~ 2 483.5) MHz

This report must not be reproduced, except in full, without written permission from Global CS Center.

□ Operating Mode 3

- Frequencies below 1 GHz

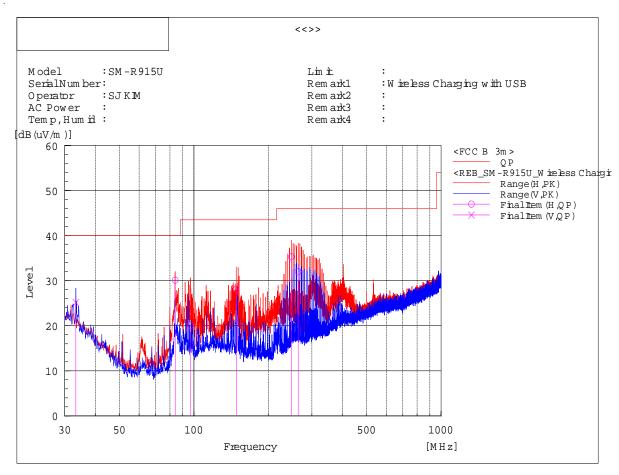

Final Result

No.	Frequency	(P)	Reading QP	c.f	Result OP	Limit OP	Margin QP	Height	Angle	Remark
	[MHz]		[dB(uV)]	[dB(1/m)]	~	[dB(uV/m)]	[ďB]	[cm]	[deq]	
1	33.274	V	33.2	-8.1	25.1	40.0	14.9	100	33	
2	83.956	Η	47.0	-16.9	30.1	40.0	9.9	214	271	
3	96.930	Η	34.6	-14.5	20.1	43.5	23.4	267	296	
4	148.340	Η	41.7	-13.6	28.1	43.5	15.4	168	340	
5	247.765	Η	46.4	-11.1	35.3	46.0	10.7	121	272	
6	264.134	Η	42.2	-10.2	32.0	46.0	14.0	102	280	

Note1) Receiving antenna polarization: Horizontal, Vertical

Test Distance : 3 m, Antenna Height : 1 to 4 meters


Result (QP) = Reading (QP) + c.f (Antenna Factor + Cable Loss - Amp. Gain)

Margin (QP) = Limit - Level (QP)

QP = Quasi-Peak, c.f = Correction Factor

Smart Wearable: SM-R915U

- Frequencies above 1 GHz

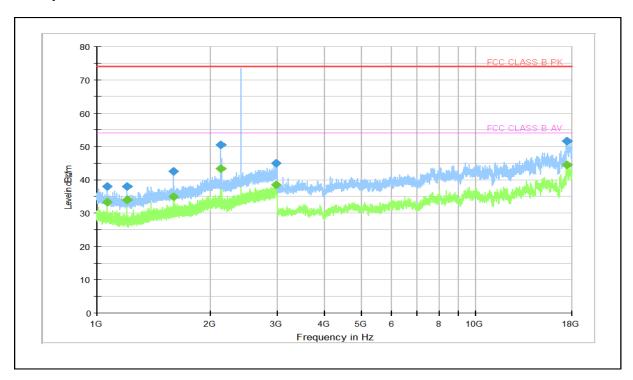

Frequency (MHz)	PK (dBµV/m)	CAV (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
1 061.800	38.00		74.00	36.00	100.10	V	288.00	7.31
1 061.800		33.32	54.00	20.68	100.50	V	288.00	7.31
1 199.800		33.90	54.00	20.10	101.70	V	323.00	6.99
1 199.800	37.89		74.00	36.11	102.40	V	323.00	6.99
1 595.200	42.44		74.00	31.56	100.50	V	62.00	10.83
1 595.200		34.79	54.00	19.21	101.10	V	62.00	10.83
2 125.800	50.42		74.00	23.58	100.80	Н	139.00	13.83
2 125.800		43.37	54.00	10.63	100.50	Н	139.00	13.83
2 969.000	44.86		74.00	29.14	100.90	Н	21.00	17.86
2 971.000		38.36	54.00	15.64	101.20	Н	157.00	17.88
17 427.000		44.40	54.00	9.60	100.70	V	85.00	36.82
17 452.500	51.55		74.00	22.45	100.10	V	15.00	36.67

Note 1) We have also tested from 18 GHz to 30 GHz and found no emissions.

Note 2) Receiving antenna polarization: Horizontal, Vertical

Test Distance: 3 m, Antenna Height: 1 to 4 meters

Level (PK and/or CAV) = Reading (PK and/or CAV) + Corr. (Antenna Factor + Cable Loss - Amp. Gain)

Margin (PK and/or CAV) = Limit – Level (PK and/or CAV)

PK = Peak, CAV = CISPR-Average, Corr. = Correction Factor

Note 3) Radiated emissions (Tx / Rx frequency) from the transceiver shall be ignored.

- Data transmission in the 2.4 GHz ISM band (Bluetooth/Wi-Fi)
- : Operating frequencies (2 400 ~ 2 483.5) MHz

This report must not be reproduced, except in full, without written permission from Global CS Center.